

## Product Information

# 11 06 160

## Insulation Stripper

With opening spring, universal



- For single, multiple and fine stranded conductors with plastic or rubber insulation up to Ø 5 mm or 10 mm<sup>2</sup>
- Easy adjustment to the required diameter of stranded wire with knurled screw and lock nut



**1000V** 

General	
Part No.	11 06 160
EAN	4003773021933
pliers	chrome-plated
head	chrome-plated
handles	insulated with multi-component grips, VDE-tested
Weight	180 g
Dimensions	160 x 57 x 19 mm
Standard	DIN EN 60900 IEC 60900
REACH compliant	does not contain SVHC
RoHS compliant	not applicable
Technical details	
Stripping capacities in square millimetres	010 mm <sup>2</sup>
Stripping capacities (diameter)	Ø 5.0 mm
AWG	8
VDE tested	yes

*Technical changes and errors excepted*

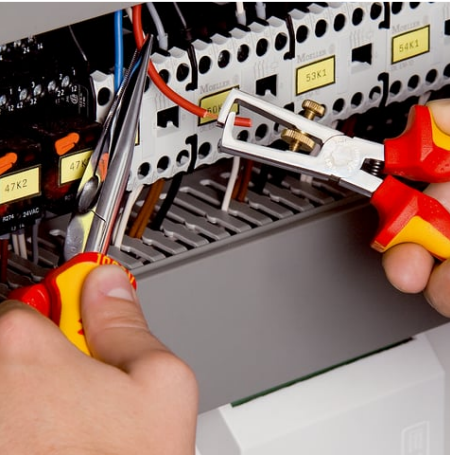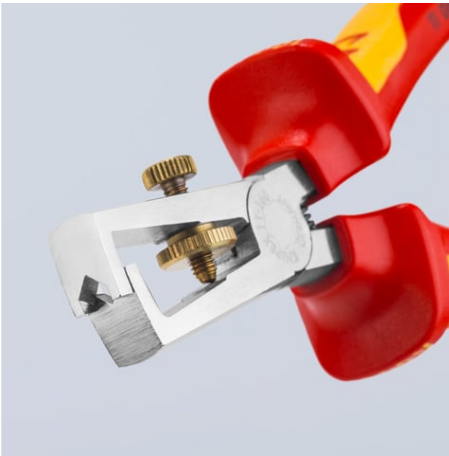

## Product Information

# 11 06 160 T

## Insulation Stripper

With opening spring, universal

- For single, multiple and fine stranded conductors with plastic or rubber insulation up to Ø 5 mm or 10 mm<sup>2</sup>
- Easy adjustment to the required diameter of solid or stranded wire with knurled screw and lock nut
- Pliers with integrated, insulated tether attachment point for a tool tether



⚠ 1000V 



General	
Part No.	11 06 160 T
EAN	4003773081418
pliers	chrome-plated
head	chrome-plated
handles	insulated with multi-component grips, VDE-tested with integrated insulated tether attachment point
Weight	180 g
Dimensions	160 x 100 x 27 mm
Standard	DIN EN 60900 IEC 60900
REACH compliant	does not contain SVHC
RoHS compliant	not applicable
Technical details	
Stripping capacities in square millimetres	010 mm <sup>2</sup>
Stripping capacities (diameter)	Ø 5.0 mm
AWG	8
Drop Protection System	yes
VDE tested	yes

Technical changes and errors excepted

