

KNIPEX StriX

Cutting and insulation stripping without changing tools


Two tools in one

V-shape stripping prism up to 10 mm²

Fine adjustment and securing

Integrated cable shears with induction hardened cutting edge for cable up to Ø 15 mm

Adjustable joint for maximum precision

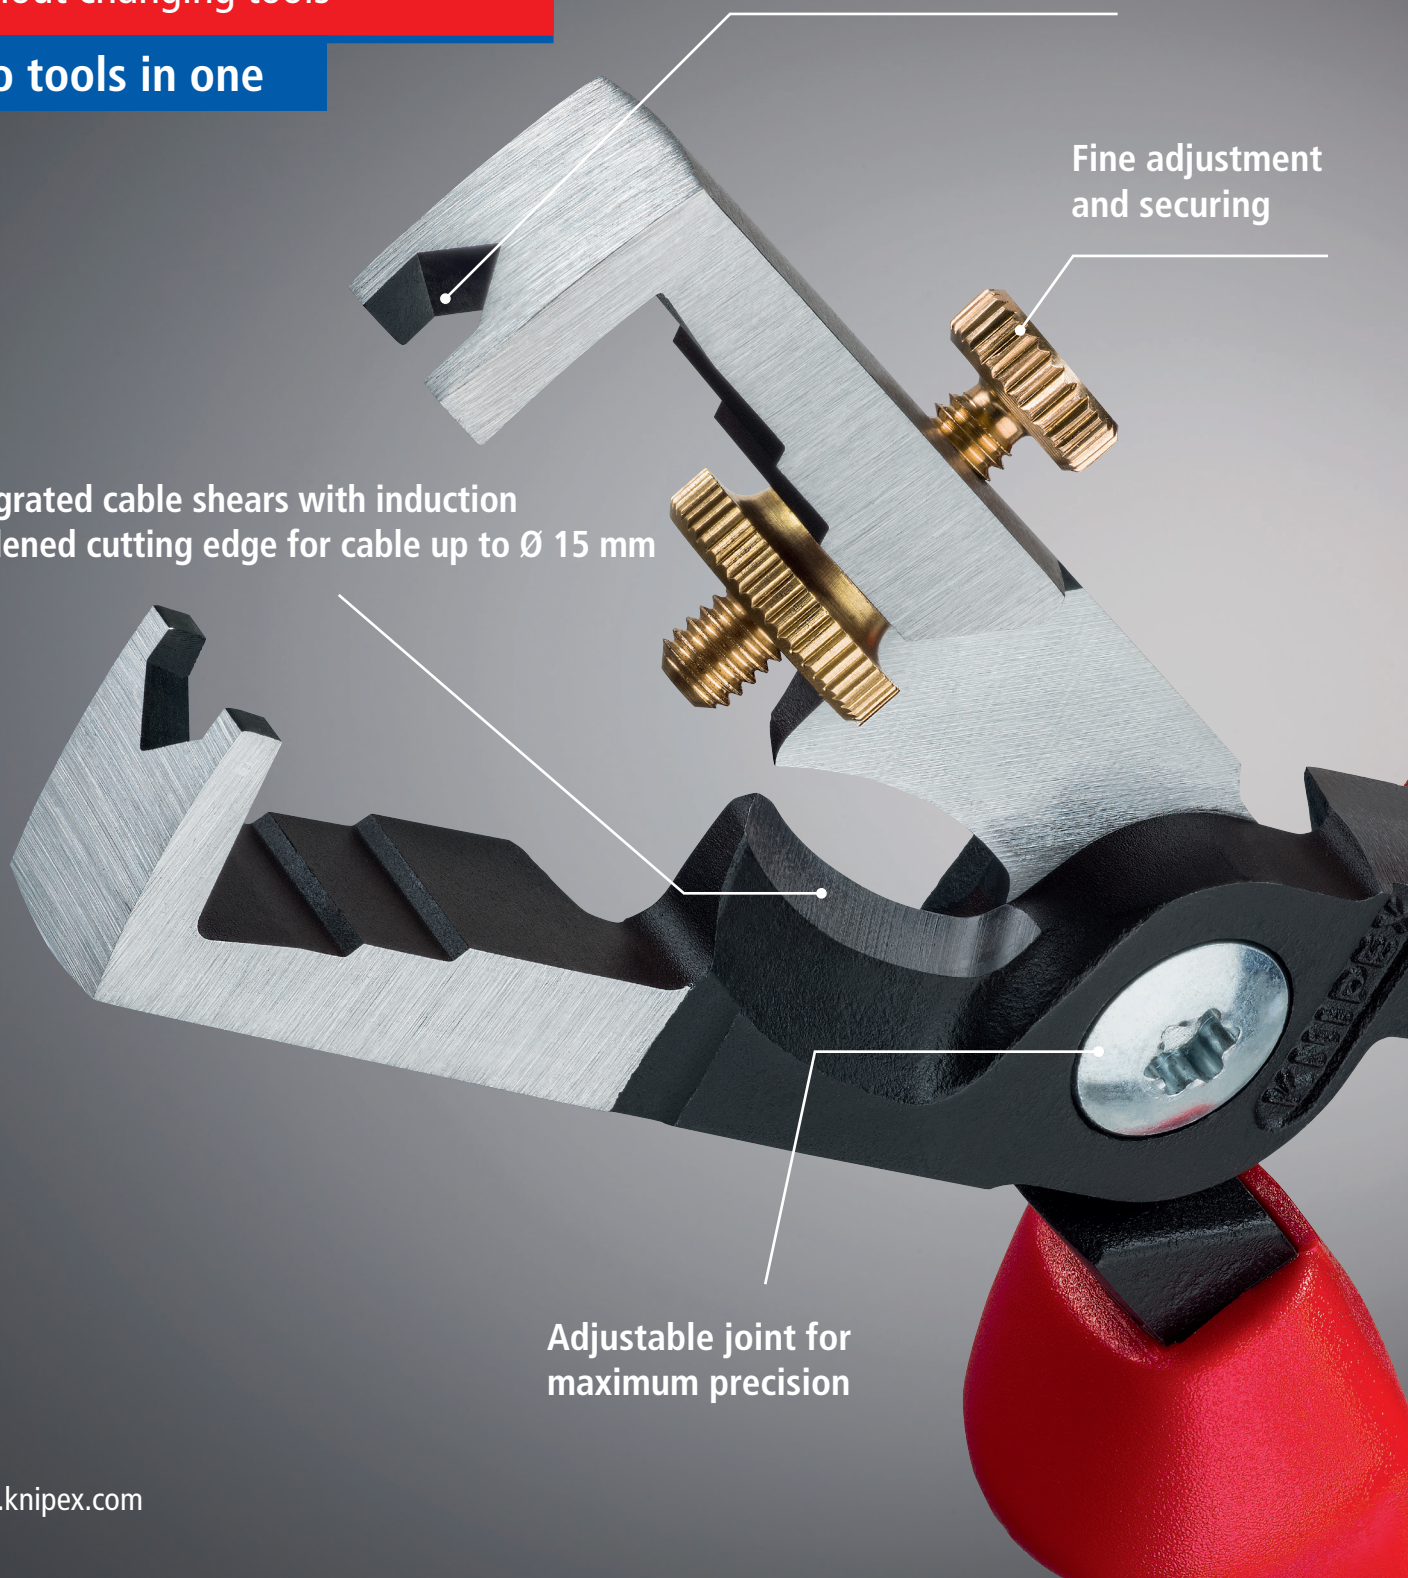

KNIPEX StriX

Insulation Strippers with Cable Shears


13

► **Insulation strippers with cable shears – two essential electrical installation tools in one pair of pliers**


- > Integrated cable shears for the clean cutting of Cu and Al cables without crushing
- > Universal adjustment of the wire stripping blades by means of a knurled screw
- > Slim design for good accessibility
- > For stripping single, multiple and fine stranded conductors with plastic and rubber insulation up to a max. Ø 5 mm or resp. 10 mm² conductor cross-section
- > Graduated jaw is a visual orientation aid when stripping wire in standard lengths (11 mm and 16 mm)
- > Special high grade tool steel that has been oil hardened in multiple stages




Induction hardened shear blade with precisely ground cutting edges for crushing-free cutting of copper cables up to Ø 15 mm (5 x 2.5 mm²)

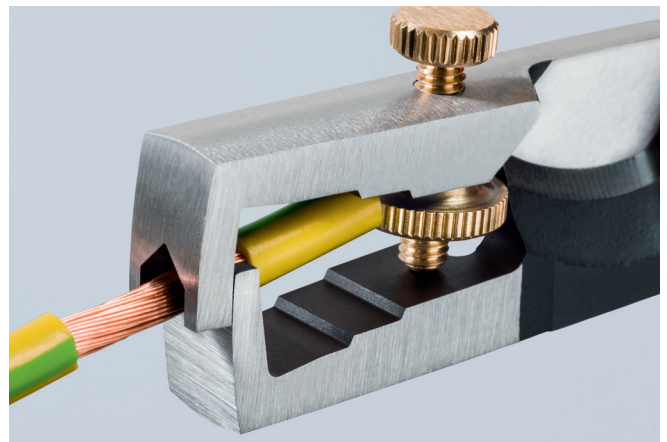

Lock nut prevents any unintentional adjustment

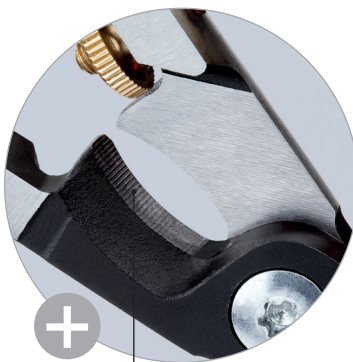

Induction hardened precision blade

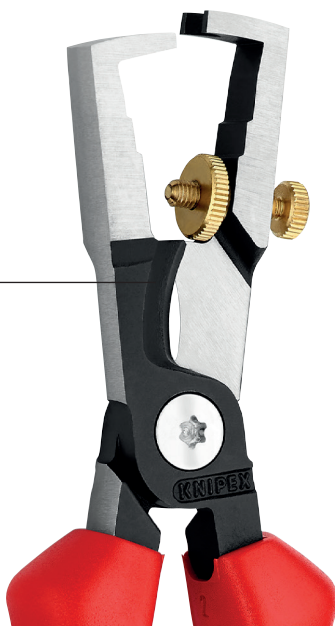

Length marking: visual markings provide support during repeated stripping of wire in standard lengths (11 and 16 mm)

Product video



Article No.	EAN	↔ mm	Pliers	Head	Handles	Cutting capacities		Stripping capacities		⚖ g	📦 g
						Ø mm	mm ²	Ø mm	mm ²		
13 62 180	081302	180	black atramentized	polished	with multi-component grips	15	50	5.0	10	210	6
13 66 180	081319	180	chrome plated		insulated with multi-component grips, VDE-tested	15	50	5.0	10	210	6

Product Information

13 62 180

KNIPEX StriX®

Insulation strippers with cable shears



- Wire stripper with cable shears – two essential electrical installation tools in one pair of pliers
- Integrated cable shears for the clean cutting of Cu- and Al-cables without crushing up to Ø 15 mm (5 x 2,5 mm²)
- Cutting edges additionally induction-hardened, cutting edge hardness approx. 57 HRC
- Universal adjustment of the stripping blades by means of a knurled screw
- Slim dimensions for easy access
- Stripping of single-, multi- and fine stranded conductors with plastic or rubber insulation up to Ø 5 mm or 10 mm² cross-section
- Graduated jaw provides a visual orientation aid when stripping wire in standard lengths (11 mm and 16 mm)

General	
Part No.	13 62 180
EAN	4003773081302
pliers	black atramentized
head	polished
handles	with multi-component handles
Weight	200 g
Dimensions	180 x 51 x 20 mm
REACH compliant	does not contain SVHC
RoHS compliant	not applicable

Technical details	
Cutting capacity copper cable, multiple-stranded	50 mm ²
Cutting capacity copper cable, multiple-stranded	Ø 15 mm
Stripping capacities in square millimetres	10.0 mm ²
Stripping capacities (diameter)	Ø 5.0 mm
AWG	8

Technical changes and errors excepted

