

High-Accuracy Height Gage Linear Height LH-600F/FG

Small Tool Instruments and
Data Management



Easy operation and High-accuracy

Intuitive operation and outstanding ease of use
Best-in-class accuracy of $\pm (1.1+0.6L/600) \mu\text{m}$

High-Accuracy Height Gage Linear Height LH-600F/FG

- Easy operation using keypad and touch screen navigation, even suitable for beginners
- Conduct various measurements such as 2D measurement and perpendicularity measurement with just one tool
- Versatile measurements through optional probes
- Enhanced data output functions make it easier to manage your measurement data



Linear Height



Easy operation using keypad and touch screen navigation


Contextual guidance on the large-screen touch panel supports your measurements



Simple, straightforward keys with icons

Icons allow the user to find the required operation at a glance.

Basic measurements

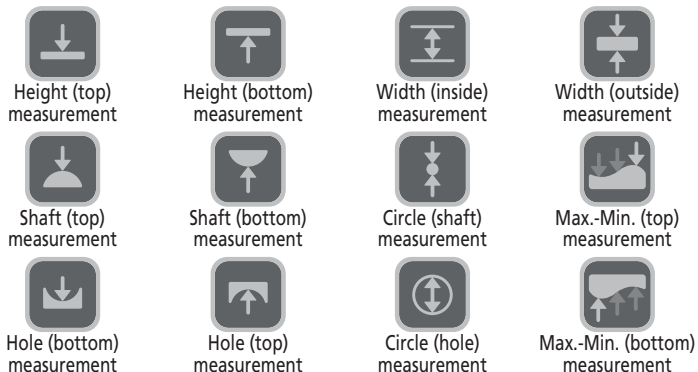

Advanced measurement functions



Part program measurement



2D measurement

Power



Power

Measurement settings



Measurement origin setting



Probe selection



Measurement origin switching

Other



Home screen




System settings



Data output

Touch panel with guidance

Measurement guidance is displayed on the large touch panel of the 8.4-inch color LCD, enabling intuitive operation.




Guidance screen



Operable with gloves


Fantastic features for shop-floor use

Automatic scale check

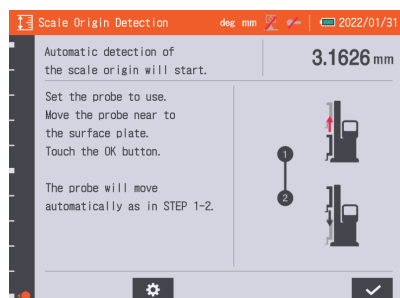

On start up, the user is led through the menu to set the scale origin and run the automated procedure to check the scale for contamination.

Calibration reminder

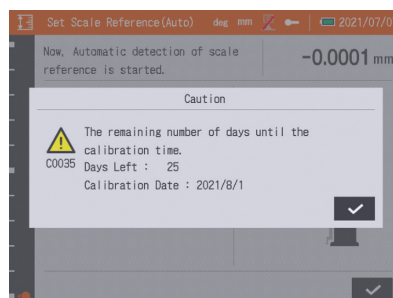

A notification will be displayed before the calibration due date that is set by the user.

Home screen


With the intuitive menu, even beginners can easily access various operations and settings.



Touch panel



Sheet key

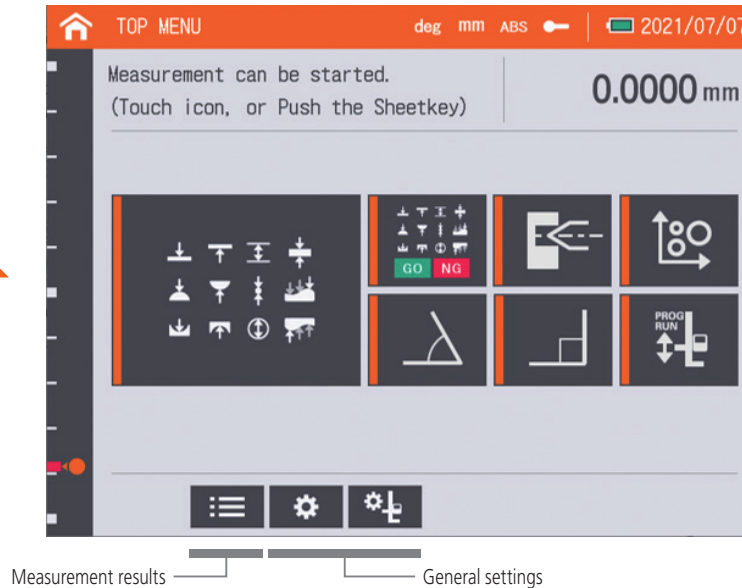


Measurements


- Basic measurements (ABS)
- Basic measurements (ABS, INCx5)
- Angle measurements
- Hole position measurements
- Perpendicularity and straightness measurements
- 2D measurements
- Part program measurements (1D, 2D)

Guidance and measurement navigation


Guidance is available in 21 languages. The display shows each measurement step, and it's very easy to use, even for beginners.




Select basic measurements



Select a measurement method




Conduct the measurement




View the measurement results

Operation log

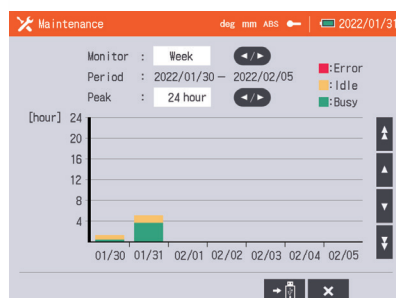

Operation log data is retained for up to 2 months and can be output to a USB memory device.

Repeat measurement function

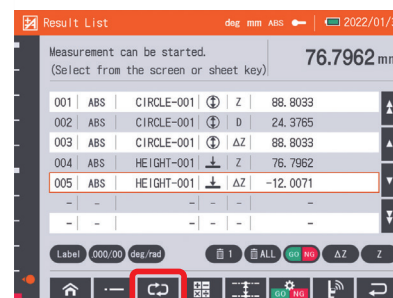



To enable efficient measurements, the user can repeat the last measurement with the optional foot switch or on-screen button.

Various measurements with just one unit

Improved usability and accessibility, including advanced measurement functions


2D measurement - Pre-placement -

This function allows the user to register the hole position of the workpiece before measurement.

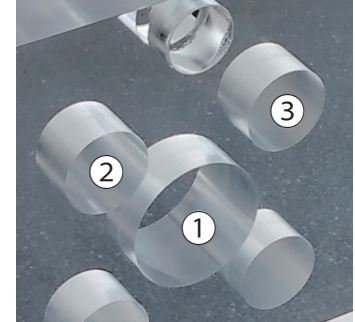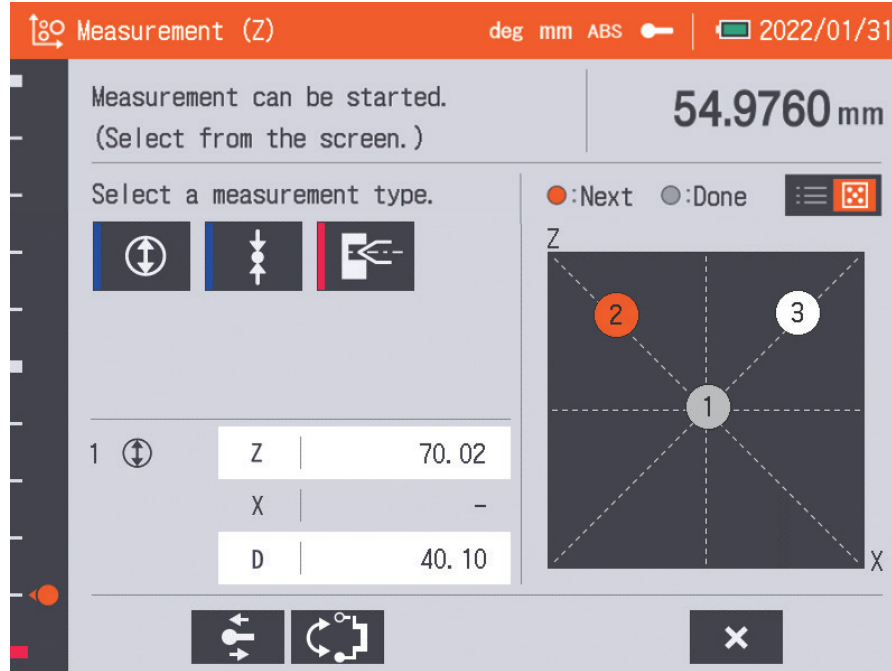


Perpendicular/straightness measurement - Graph creation -


You can check the measurement results of perpendicularity and straightness in real time during measurement. After measurement, you can easily see the trends of the measurement results in a graph.

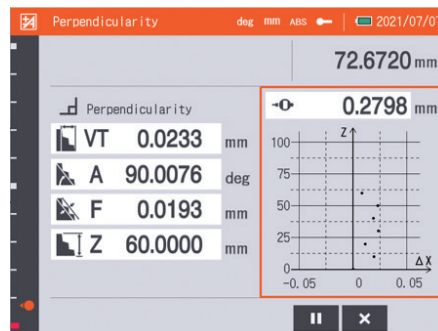


Show results in real time during measurement.

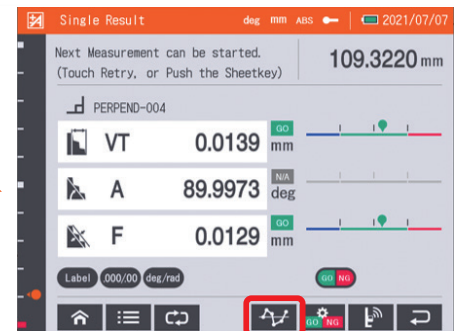

Show results after measurement.

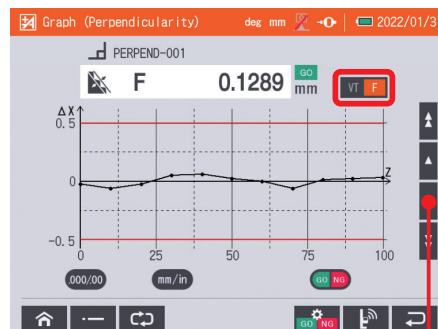


You can monitor the graphs of past measurement results.

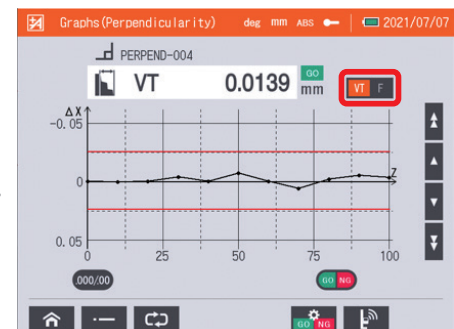

Show measurement results in graph form.


Part program measurement

You can easily access and use the functions of Create, Run, Edit, and View results of part programs.

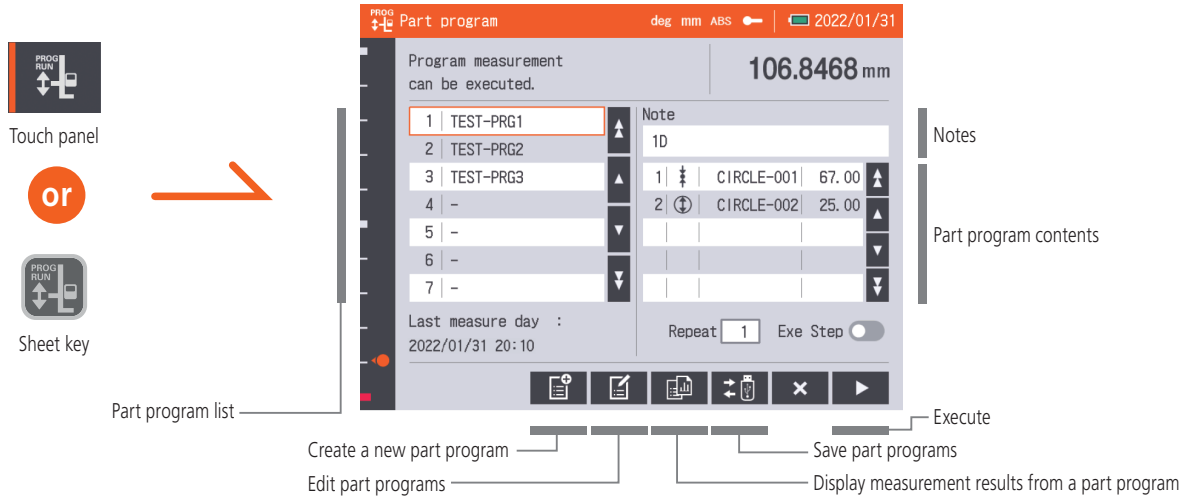

Example of performing part program measurement

Run the program repeatedly (when the number of executions is $\neq 1$)

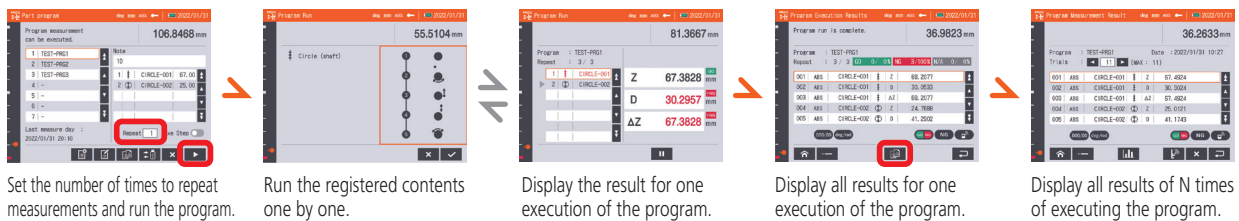


Copy part programs to other devices


By using a USB memory device, you can copy part programs to other devices.

Expanded measurement area

With the new optional probes, you can now measure areas that were beyond the capacity of conventional probes.

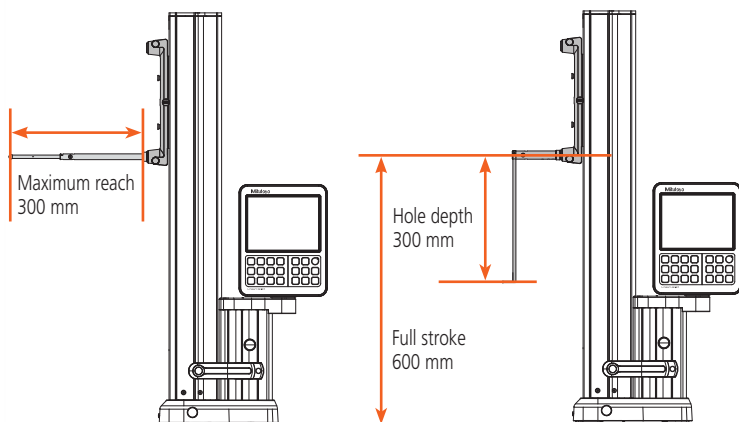

Example of deep hole measurement


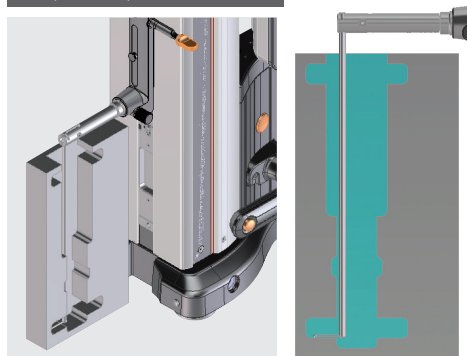


Versatile measurements through optional probes

An extension holder and a depth stylus extend the measuring range both horizontally and vertically

Three types of optional probes:

- 1 The holder and the stylus can be freely combined according to the purpose of measurement, and the measurement area can be changed.
 - 2 This type is used for single-use measurements such as measuring a tapered hole or a knife edge.
 - 3 This type is used to measure straightness and perpendicularity.
- ☆ You can adjust the balance of the slider by adjusting the number of auxiliary weights.
(Magnetic auxiliary weights are easy to add and remove.)

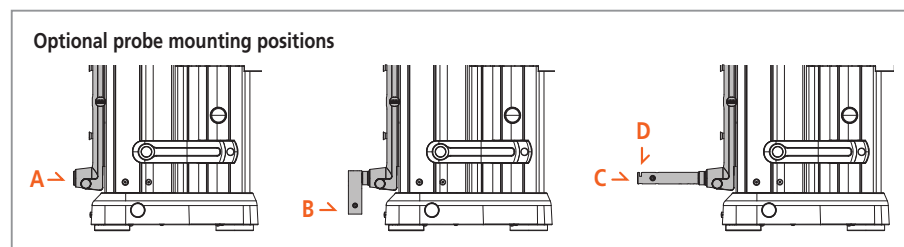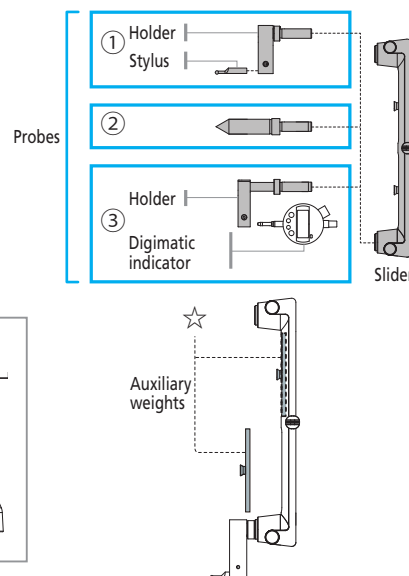

Holders/styli for position A

		Part No.	Product name	Number of weights
Mounting example For extension holder 100		12AA Y343	ø5 stepped probe (standard accessory)	2
		12AAA837 12AAA792	Holder for Indicator (inch – Ø3/8") Holder for Indicator (metric – Ø8mm)	0
		12AAA793	Holder (long)	*1
		12AAB136	ø10 cylindrical universal probe	2
		12AA Y595	Extension holder 100	*1
		12AA Y596	Extension holder 200	*1
		12AAC072	Depth probe	2
		12AAC073	Tapered stylus (ø20)	2

*1: Varies depending on the stylus



Styli for position B/C

	Part No.	Product name	Number of weights*3
Mounting example Ø5 ball stylus L130 in position B		12AAF666 ø1 ball stylus (coaxial type)	2
		957261 ø2 ball stylus (coaxial type)	2
		12AAF667 ø2 ball stylus (coaxial type), ruby ball	2
		957262 ø3 ball stylus (coaxial type)	2
		957263 ø4 ball stylus (coaxial type)	2
		12AAB552 ø10 ball stylus (coaxial type), L=50	2
		12AAF668 ø10 ball stylus (coaxial type), L=82	1
		12AAF669 ø10 ball stylus (coaxial type), L=120	1
Mounting example Ø5 ball stylus L130 in position C		12AAF670 ø5 disk stylus	2
		12AAF671 ø10 disk stylus	2
		957264 ø14 disk stylus	2
		957265 ø20 disk stylus	2
		12AAF672 ø1 ball stylus (eccentric type)	2
		12AAF673 ø2 ball stylus (eccentric type)	2
		12AAA788 ø4 ball stylus (eccentric type)	2
		12AAA789 ø6 ball stylus (eccentric type)	1
		226117 Shank with M2 thread*2	2
		226118 Shank with M3 thread*2	2
		12AAY597 ø5 ball stylus L130	1
		12AAY598 ø25 disk stylus	1

*2: Stylus for coordinate measuring machine can be mounted. *3: When using an extension holder. Note: Where the material is not described, the tip of the stylus is carbide.

Small Stylus Kit - M3 - for position B

	Contents	Description	øS	L
 K650986	1x Part No. K650415	Adapter block		
	1x Part No. K651223	Pin wrench ø 1.2mm		
	1x Part No. K651157	Extension steel M3		20
	1x Part No. K651156	Extension steel M3		10
	1x Part No. A-5000-3615	Disk stylus steel M3	12.7	33
	1x Part No. K651151	Stylus steel-ruby M3	4	31
	1x Part No. K651148	Stylus steel-ruby M3	3	21
	1x Part No. K651147	Stylus steel-ruby M3	2	21
	1x Part No. K651146	Stylus steel-ruby M3	1	21


Styli for position D

	Part No.	Product name	Number of weights*4
Mounting example Depth stylus 70 is mounted in position D		12AAY599 Depth stylus 70	2
		12AAY600 Depth stylus 150	1
		12AAY601 Depth stylus 300	0
		12AAY602 Depth stylus 70 ø2 ball	2
		12AAY603 Depth stylus 150 ø2 ball	1
		12AAY604 Depth stylus 300 ø2 ball	0
Mounting example Depth stylus 150 ø4 ball is mounted in position D		12AAY605 Depth stylus 70 ø4 ball	2
		12AAY606 Depth stylus 150 ø4 ball	1
		12AAY607 Depth stylus 300 ø4 ball	0

*4: Can only be attached to the extension holder. * Where the material is not described, the tip of the stylus is carbide.

Enhanced data output functions make it easier to manage your measurement data

Data output improves work efficiency and the reliability of recorded data

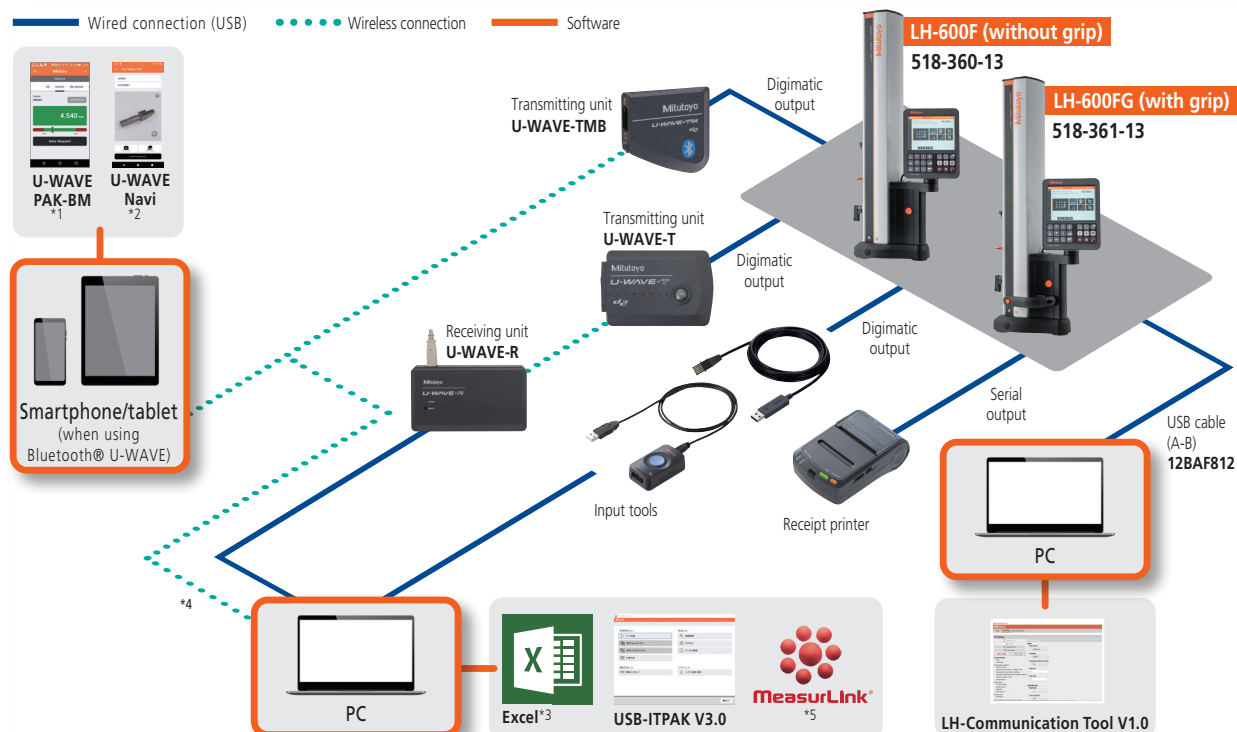

*1: Available at Apple Store and Google Play for free download. *2: Available at Google Play for free download.
 *3: Excel is a registered trademark of Microsoft Corporation. *4: It is also possible to connect with a Bluetooth compatible PC.
 *5: MeasurLink® is a registered trademark of Mitutoyo Corporation (Japan) and Mitutoyo America Corporation (USA).

Optional products for outputting measurement data

Part No.	Product name
12AA482	Receipt printer (for North America)*6
12AAN052	Printer paper for receipt printer (set of 10)
12AA485	Printer mounting attachment
12AAN146	Connection cable for printer
—	(USB memory device)*7
12BAF812	USB cable (type A - type B) (2 m)
543-700B	Digimatic indicator (ID-C0512NXX) Ø8mm stem
543-701B	Digimatic indicator (ID-C0512MNXB) Ø8mm stem
543-702B	Digimatic indicator (ID-C0512ENXB) Ø3/8" stem
519-521	Lever head probe MLH-521
519-562A	Mu-checker M-562

*6: A small printer (optionally battery-powered) that can be mounted on the main unit. It includes a printer cable and mounting bracket.

*7: USB memory devices should be formatted with FAT16/32. NTFS and exFAT are not supported.


Part No.	Product name
936937	Digimatic cable (1 m) for Mu Checker
965014	Digimatic cable (2 m) for Mu Checker
264-505A	Digimatic mini processor (DP-1VA)
06AGQ001F	Input tool (USB-ITN-SF)
264-020	Input tool (IT-020U)
06AGL011	Digimatic S1 cable, (1 m) for 543-70xB Series
06AGL021	Digimatic S1 cable, (2 m) for 543-70xB Series
12AAJ088	Foot switch
02AZD810D	U-WAVE-R
264-626	U-WAVE-TMB (IP67 type)
264-627	U-WAVE-TMB (Buzzer type)
02AZD730G	U-WAVE-T (IP67 type)
02AZD880G	U-WAVE-T (Buzzer type)
12AA486	U-WAVE T mounting bracket
02AZG011	Bidirectional Digimatic S1 cable (160 m)

LH-Communication Tool V1.0 software for creating inspection reports and configuring system settings

You can easily create and save inspection reports and configure device parameters.

* Available at Mitutoyo website for free download.

* To connect to a PC, use a USB cable (type A-B).

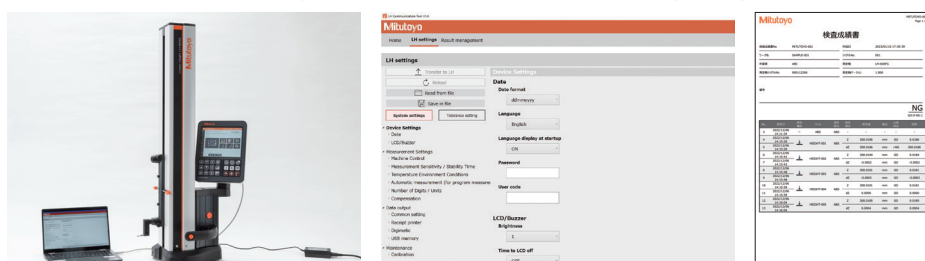

Specifications

Model		LH-600F	LH-600FG
Order No.	inch/mm	518-360-13	518-361-13
Power grip		without power grip	with power grip
Measuring range (Stroke)		0 to 977 mm (600 mm) 0 to 38 in (24 in)	
Resolution		0.0001/ 0.001/ 0.01/ 0.1 mm (selectable) 0.000001/ 0.00001/ 0.0001/ 0.001 in (selectable)	
Accuracy (at 20 °C)	Indication accuracy* ⁸	$\pm (1.1 + 0.6L / 600) \mu\text{m}$, L= Measured length (mm)	
	Repeatability* ⁸	Plane: 0.4 μm (2 σ), Hole: 0.9 μm (2 σ)	
	Perpendicularity (forward and backward)* ⁹	5 μm (after compensation)	
	Straightness (forward and backward)* ⁹	4 μm (mechanical accuracy)	
Driving method(speed)		Motor-driven (5, 10, 15, 20, 25, 30, 40 mm/s: 7 steps) / Manual	
Scale unit		Photoelectric incremental encoder STVC-20Z	
Measuring force		1 N (automatic constant-force function)	
Main unit moving mode		Full-floating (moving) / Semi-floating (measuring) Air bearing (built-in compressor)	
Display unit		8.4 inch touch-screen, LCD	
Adjustment of display unit		Stepless tilt adjustment: 0 to 40° Stepless swivel adjustment: -30 to 180°	
Preventive maintenance		Scale status notification, calibration schedule notification	
Probe diameter compensation		· Semi-automatic compensation using the probe diameter calibration block (standard accessory) · Compensation by inputting the probe diameter	
Power supply		AC adapter 100-240V $\pm$ 10% 50/60Hz/ Battery (NiMH)	
Battery operation time* ¹⁰		Battery powered(standard): 4 hours, Powered by 2 batteries: 8 hours	
Battery charging time* ¹¹		Approx. 3.5 hours (can be used while charging)	
Dimensions (WxDxH)		238 (W) x 492 (D) x 996 (H) mm	
Mass		26.1 kg	26.6 kg
Operating temperature / humidity ranges		5 to 40 °C/ 20 to 80% RH (non-condensing)	
Data output		Digimatic d2/ S1 (bi-directional communication)	


*8: Specification determined at in-house ambient temperature

*10: In-house standard(floating and motor-driven vertical movement, operated at 25%)


*9: Guaranteed when using the Lever Head (519-521) and Mu-Checker (519-561).

*11: When ambient temperature is 30 °C or higher, the battery may not be charged sufficiently.

Dimensions

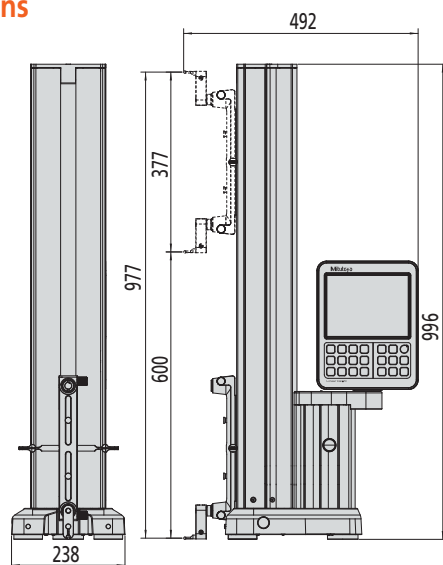

LH-600F (without grip)

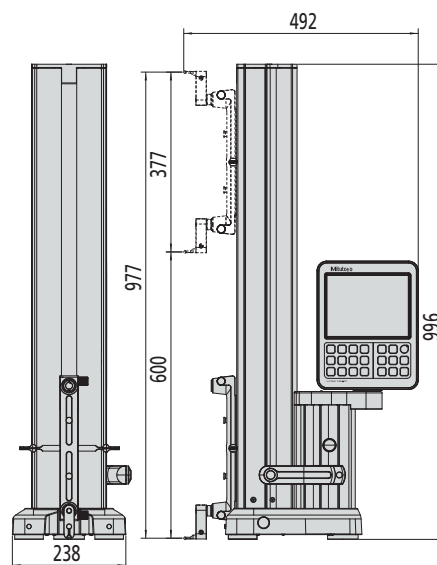

LH-600FG (with grip)

Unit: mm
25.4mm = 1"


Standard accessories

Ø5 stepped probe, ball-diameter compensation block (with cover and base), auxiliary weight (2 pcs. pre-mounted), battery pack (1 pc)*¹², AC adapter, power cable for AC adapter, clear cover, conveying handle, cap, hex wrench, manual set, inspection certificate, Touch pen, protective sheet, Phillips screwdriver

*12: One piece included as standard. Optional additional battery (using total of two batteries) for longer battery-powered operation.

Special accessories

Additional battery pack (Part No.: **12AAF712**), model workpiece (Part No.: **12AAA879**)

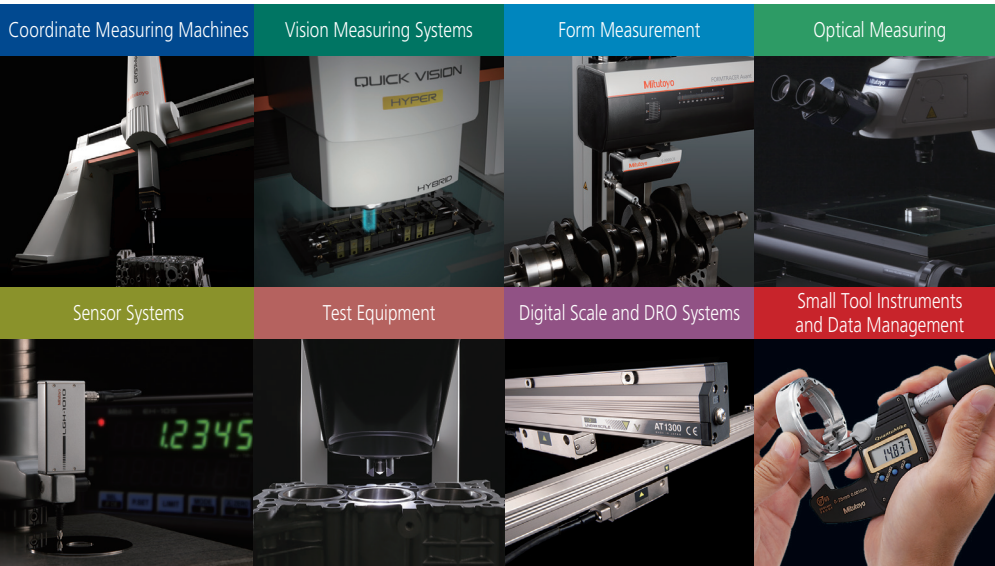

Whatever your challenges are, Mitutoyo supports you from start to finish.

Mitutoyo is not only a manufacturer of top quality measuring products but one that also offers qualified support for the lifetime of the equipment, backed up by comprehensive services that ensure your staff can make the very best use of the investment.

Apart from the basics of calibration and repair, Mitutoyo offers product and metrology training, as well as IT support for the sophisticated software used in modern measuring technology. We can also design, build, test and deliver measuring solutions and even, if deemed cost-effective, take your critical measurement challenges in-house on a sub-contract basis.

My.Mitutoyo

Mitutoyo End User Portal

Search for products, request a product quote, take online metrology courses, and much more.

My.Mitutoyo.com puts everything Mitutoyo directly in front of you.



Tài liệu được tổng hợp bởi đội ngũ kỹ thuật của **NPOWER**
Bản quyền nội dung thuộc về **Mitutoyo**

Powered by **NAVITECH** | www.navitech.co
www.npower.com.vn

Note: All information regarding our products, and in particular the illustrations, drawings, dimensional and performance data contained in this printed matter as well as other technical data are to be regarded as approximate average values. We therefore reserve the right to make changes to the corresponding designs. The stated standards, similar technical regulations, descriptions and illustrations of the products were valid at the time of printing. In addition, the latest applicable version of our General Trading Conditions will apply. Only quotations submitted by ourselves may be regarded as definitive. Specifications are subject to change without notice.

Mitutoyo products are subject to US Export Administration Regulations (EAR). Re-export or relocation of our products may require prior approval by an appropriate governing authority.

Trademarks and Registrations

Designations used by companies to distinguish their products are often claimed as trademarks. In all instances where Mitutoyo America Corporation is aware of a claim, the product names appear in initial capital or all capital letters. The appropriate companies should be contacted for more complete trademark and registration information.

Mitutoyo

Mitutoyo America Corporation

www.mitutoyo.com

One Number to Serve You Better

1-888-MITUTOYO (1-888-648-8869)

M³ Solution Centers:

Aurora, Illinois (Headquarters)

Boston, Massachusetts

Charlotte, North Carolina

Cincinnati, Ohio

Detroit, Michigan

Los Angeles, California

Seattle, Washington

Houston, Texas