

Product Information

03 01 140

Combination Pliers

- Long cutting edges for thicker cables
- With gripping zones for flat and round material, suitable for versatile use
- Cutting edges additionally induction-hardened, cutting edge hardness approx. 60 HRC
- With cutting edges for soft and hard wire



General	
Article No.	03 01 140
EAN	4003773015192
pliers	black atramentized
head	polished
handles	plastic coated
Weight	106 g
Dimensions	140 x 50 x 12 mm
Standard	DIN ISO 5746
REACH compliant	does not contain SVHC
RoHS compliant	not applicable
Technical details	
Cutting capacities medium hard wire (diameter)	Ø 2.8 mm
Cutting capacities hard wire (diameter)	Ø 1.8 mm
Cutting capacity copper cable, multiple-stranded	Ø 9.0 mm
Cutting capacity copper cable, multiple-stranded	10.0 mm ²

Technical changes and errors excepted



Product Information

03 01 160

Combination Pliers

- Long cutting edges for thicker cables
- With gripping zones for flat and round material, suitable for versatile use
- Cutting edges additionally induction-hardened, cutting edge hardness approx. 60 HRC
- With cutting edges for soft and hard wire



General

Article No.	03 01 160
EAN	4003773013235
pliers	black atramentized
head	polished
handles	plastic coated
Weight	187 g
Dimensions	160 x 48 x 13 mm
Standard	DIN ISO 5746
REACH compliant	does not contain SVHC
RoHS compliant	not applicable

Technical details

Cutting capacities medium hard wire (diameter)	Ø 3.1 mm
Cutting capacities hard wire (diameter)	Ø 2.0 mm
Cutting capacity copper cable, multiple-stranded	Ø 10.0 mm
Cutting capacity copper cable, multiple-stranded	16.0 mm ²

Technical changes and errors excepted




Product Information

03 01 180

Combination Pliers

- Long cutting edges for thicker cables
- With gripping zones for flat and round material, suitable for versatile use
- Cutting edges additionally induction-hardened, cutting edge hardness approx. 60 HRC
- With cutting edges for soft and hard wire

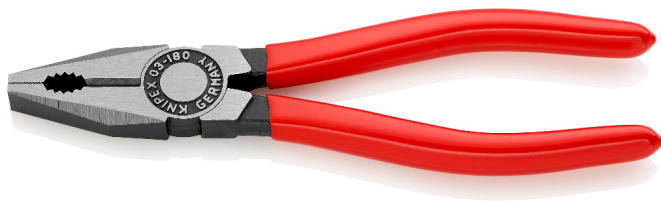

General	
Article No.	03 01 180
EAN	4003773013242
pliers	black atramentized
head	polished
handles	plastic coated
Weight	216 g
Dimensions	180 x 47 x 11 mm
Standard	DIN ISO 5746
REACH compliant	does not contain SVHC
RoHS compliant	not applicable
Technical details	
Cutting capacities medium hard wire (diameter)	Ø 3.4 mm
Cutting capacities hard wire (diameter)	Ø 2.2 mm
Cutting capacity copper cable, multiple-stranded	Ø 12.0 mm
Cutting capacity copper cable, multiple-stranded	16.0 mm ²

Technical changes and errors excepted



Product Information

03 01 200

Combination Pliers

- Long cutting edges for thicker cables
- With gripping zones for flat and round material, suitable for versatile use
- Cutting edges additionally induction-hardened, cutting edge hardness approx. 60 HRC
- With cutting edges for soft and hard wire



General	
Article No.	03 01 200
EAN	4003773013259
pliers	black atramentized
head	polished
handles	plastic coated
Weight	276 g
Dimensions	200 x 43 x 14 mm
Standard	DIN ISO 5746
REACH compliant	does not contain SVHC
RoHS compliant	not applicable
Technical details	
Cutting capacities medium hard wire (diameter)	Ø 3.8 mm
Cutting capacities hard wire (diameter)	Ø 2.5 mm
Cutting capacity copper cable, multiple-stranded	Ø 13.0 mm
Cutting capacity copper cable, multiple-stranded	16.0 mm ²

Technical changes and errors excepted



Product Information

03 01 250

Combination Pliers

- Long cutting edges for thicker cables
- With gripping zones for flat and round material, suitable for versatile use
- Cutting edges additionally induction-hardened, cutting edge hardness approx. 60 HRC
- With cutting edges for soft and hard wire



General	
Article No.	03 01 250
EAN	4003773015222
pliers	black atramentized
head	polished
handles	plastic coated
Weight	480 g
Dimensions	250 x 48 x 17 mm
Standard	DIN ISO 5746
REACH compliant	does not contain SVHC
RoHS compliant	not applicable

Technical details	
Cutting capacities medium hard wire (diameter)	Ø 3.8 mm
Cutting capacities hard wire (diameter)	Ø 2.5 mm
Cutting capacity copper cable, multiple-stranded	Ø 15.0 mm
Cutting capacity copper cable, multiple-stranded	25.0 mm ²

Technical changes and errors excepted

