


|                        |                                                                                                                                                                                                                                                                                                                                 |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>034-6</b>                                                                                                                                                                                                                                                                                                                    |
| article description    | <b>CEE-plug 63A 4p 6h IP67 POWER TWIST</b>                                                                                                                                                                                                                                                                                      |
| description long       | CEE-plug 63A 4p 6h IP67 POWER TWIST<br>housing material: PA6<br>rated current: 63A<br>number of poles: 4 (3P+PE)<br>clock-position: 6h<br>rated voltage/frequency: 380-415V~ / 50+60Hz<br>contacts: brass nickel plated, with pilot pin<br>connection technology: frame terminals with screws<br>IP protection class: IP66/IP67 |
| GTIN (EAN)             | 9003399039836                                                                                                                                                                                                                                                                                                                   |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                              |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                        |
| net weight             | 0.617 kg                                                                                                                                                                                                                                                                                                                        |
| packaging quantity     | 2                                                                                                                                                                                                                                                                                                                               |
| minimum order quantity | 2                                                                                                                                                                                                                                                                                                                               |

|                                 |                      |
|---------------------------------|----------------------|
| ETIM 9.0                        | EC000140             |
| IEC-amperage                    | 63 A                 |
| Number of poles                 | 4                    |
| Voltage according to EN 60309-2 | 400 V (50+60 Hz) red |
| Clock hour position             | 6 h                  |
| Identification colour           | Red                  |
| RAL-number                      | 7046                 |
| Degree of protection (IP)       | IP67                 |
| Connection system               | Screwed terminal     |
| Cable entry                     | Gland nut            |
| Angle of plug                   | Straight             |
| Material                        | Plastic              |
| Contact material                | CuZn                 |
| Surface treatment contacts      | Nickel-plated        |

|                        |                      |
|------------------------|----------------------|
| a                      | 250 mm               |
| b                      | 115 mm               |
| K (cable Ø)            | 14,5-36 mm           |
| SW                     | 61 mm                |
| wire flexible          | 6-16 mm <sup>2</sup> |
| contact screws         | 200 Ncm              |
| connecting screws      | 200 Ncm              |
| strain relief          | 1500 Ncm             |
| dismantling length     | 100 mm               |
| stripping length       | 15-18 mm             |
| ambient temperature    | -25 – 40 °C          |
| temperature resistance | -25 – 80 °C          |

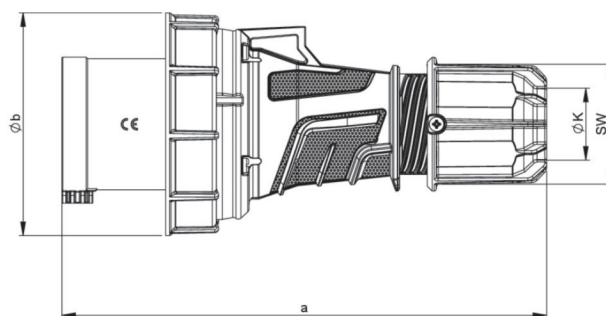

<https://www.pcelectric.at/shop/en/?func=detail&artnr=034-6>

**www.npower.com.vn**

Tài liệu được tổng hợp bởi đội ngũ kỹ thuật của **NPOWER**  
Bản quyền nội dung thuộc về công ty **PCE**



Powered by **NAVITECH** | [www.navitech.co](http://www.navitech.co)


|                        |                                                                                                                                                                                                                                                                                                                                   |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>044-6</b>                                                                                                                                                                                                                                                                                                                      |
| article description    | <b>CEE-plug 125A 4p 6h IP67 POWER TWIST</b>                                                                                                                                                                                                                                                                                       |
| description long       | CEE-plug 125A 4p 6h IP67 POWER TWIST<br>housing material: PA6<br>rated current: 125A<br>number of poles: 4 (3P+PE)<br>clock-position: 6h<br>rated voltage/frequency: 380-415V~ / 50+60Hz<br>contacts: brass nickel plated, with pilot pin<br>connection technology: frame terminals with screws<br>IP protection class: IP66/IP67 |
| GTIN (EAN)             | 9003399022227                                                                                                                                                                                                                                                                                                                     |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                                |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                          |
| net weight             | 1.064 kg                                                                                                                                                                                                                                                                                                                          |
| packaging quantity     | 2                                                                                                                                                                                                                                                                                                                                 |
| minimum order quantity | 2                                                                                                                                                                                                                                                                                                                                 |

|                                 |                      |
|---------------------------------|----------------------|
| ETIM 9.0                        | EC000140             |
| IEC-amperage                    | 125 A                |
| Number of poles                 | 4                    |
| Voltage according to EN 60309-2 | 400 V (50+60 Hz) red |
| Clock hour position             | 6 h                  |
| Identification colour           | Red                  |
| RAL-number                      | 7046                 |
| Degree of protection (IP)       | IP67                 |
| Connection system               | Screwed terminal     |
| Cable entry                     | Gland nut            |
| Angle of plug                   | Straight             |
| Material                        | Plastic              |
| Contact material                | CuZn                 |
| Surface treatment contacts      | Nickel-plated        |

|                        |                       |
|------------------------|-----------------------|
| a                      | 270 mm                |
| b                      | 131 mm                |
| K (cable Ø)            | 22,5-50 mm            |
| SW                     | 81 mm                 |
| wire flexible          | 16-50 mm <sup>2</sup> |
| contact screws         | 450 Ncm               |
| connecting screws      | 200 Ncm               |
| strain relief          | 1500 Ncm              |
| dismantling length     | 100 mm                |
| stripping length       | 24-27 mm              |
| ambient temperature    | -25 – 40 °C           |
| temperature resistance | -25 – 80 °C           |
| IK-code *)             | IK10                  |



\*) The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. PC Electric GmbH has therefore tested the IK-codes of these products in accordance with IEC 62262 and according to the test method of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40°C and a relative humidity of 95%.

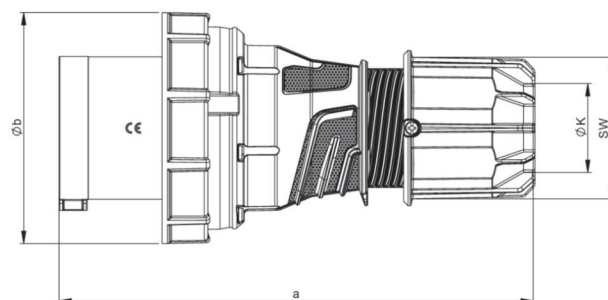

<https://www.pcelectric.at/shop/en/?func=detail&artnr=044-6>

**www.npower.com.vn**

Tài liệu được tổng hợp bởi đội ngũ kỹ thuật của **NPOWER**  
Bản quyền nội dung thuộc về công ty **PCE**



Powered by **NAVITECH** | [www.navitech.co](http://www.navitech.co)