

PCE data sheet


| | |
|------------------------|--|
| article# | 1242-3v |
| article description | CEE-wall mounted socket 32A 4p 3h IP67 |
| description long | CEE-wall mounted socket 32A 4p 3h IP67 housing material: PA6 rated current: 32A number of poles: 4 (3P+PE) clock-position: 3h rated voltage/frequency: 380/440V~ / 50/60Hz contacts: brass nickel plated connection technology: screw terminals cable entry: top and rear incl. threaded cable gland IP protection class: IP67 |
| GTIN (EAN) | 9003399146213 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.314 kg |
| packaging quantity | 5 |
| minimum order quantity | 5 |

| | |
|---------------------------------|--------------------------|
| ETIM 9.0 | EC001321 |
| Model | Surface mounted |
| IEC-amperage | 32 A |
| Number of poles | 4 |
| Voltage according to EN 60309-2 | 400-440 V (50+60 Hz) red |
| Clock hour position | 3 h |
| Identification colour | Red |
| Degree of protection (IP) | IP67 |
| Connection system | Screwed terminal |
| Cable entry | Gland nut |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Nickel-plated |
| Type of fastening | External mounting |

| | |
|------------------------|------------------------|
| a | 161 mm |
| b | 108 mm |
| wire flexible | 2,5-6 mm ² |
| wire solid | 2,5-10 mm ² |
| contact screws | 110 Ncm |
| connecting screws | 110 Ncm |
| dismantling length | 50 mm |
| stripping length | 12-14 mm |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |
| IK-code *) | IK09 |



*) The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. PC Electric GmbH has therefore tested the IK-codes of these products in accordance with IEC 62262 and according to the test method of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40°C and a relative humidity of 95%.

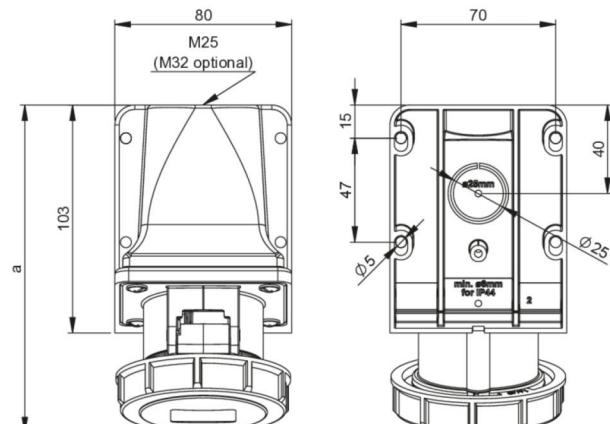

b=Höhe/height
Neigung/angle=15°



www.npower.com.vn

Tài liệu được tổng hợp bởi đội ngũ kỹ thuật của **NPOWER**
Bản quyền nội dung thuộc về công ty **PCE**



Powered by NAVITECH | www.navitech.co