


|                        |                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>3152-6</b>                                                                                                                                                                                                                                                                                                                                                             |
| article description    | <b>CEE-flanged socket straight (75x75mm) 16A 5p 6h IP67</b>                                                                                                                                                                                                                                                                                                               |
| description long       | CEE-flanged socket straight (75x75mm) 16A 5p 6h IP67<br>housing material: PA6<br>rated current: 16A<br>number of poles: 5 (3P+N+PE)<br>clock-position: 6h<br>rated voltage/frequency: 200/346V~ - 240/415V~ / 50+60Hz<br>contacts: brass<br>connection technology: screw terminals<br>dimensions (flange/fixing center): 75x75 mm / 60x60 mm<br>IP protection class: IP67 |
| GTIN (EAN)             | 9003399115806                                                                                                                                                                                                                                                                                                                                                             |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                                                                        |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                                                                  |
| net weight             | 0.180 kg                                                                                                                                                                                                                                                                                                                                                                  |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                                                                                        |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                                                                                        |

|                                 |                      |
|---------------------------------|----------------------|
| ETIM 9.0                        | EC001317             |
| IEC-amperage                    | 16 A                 |
| Voltage according to EN 60309-2 | 400 V (50+60 Hz) red |
| Number of poles                 | 5                    |
| Clock hour position             | 6 h                  |
| Identification colour           | Red                  |
| Degree of protection (IP)       | IP67                 |
| Connection system               | Screw terminal       |
| Angle of plug                   | Straight             |
| Material                        | Plastic              |
| Contact material                | CuZn                 |
| Surface treatment contacts      | Untreated            |
| Flange size vertical            | 75 mm                |
| Drill hole distance vertical    | 60 mm                |
| Flange size horizontal          | 75 mm                |
| Drill hole distance horizontal  | 60 mm                |

|                        |                       |
|------------------------|-----------------------|
| a                      | 75 mm                 |
| b                      | 75 mm                 |
| c                      | 60 mm                 |
| d                      | 60 mm                 |
| e                      | 21 mm                 |
| f                      | 59 mm                 |
| g                      | 5,5 mm                |
| h                      | 55 mm                 |
| i                      | 117 mm                |
| j                      | 115 mm                |
| wire flexible          | 1-2,5 mm <sup>2</sup> |
| wire solid             | 1-4 mm <sup>2</sup>   |
| contact screws         | 100 Ncm               |
| dismantling length     | 50 mm                 |
| stripping length       | 10-12 mm              |
| ambient temperature    | -25 – 40 °C           |
| temperature resistance | -25 – 80 °C           |

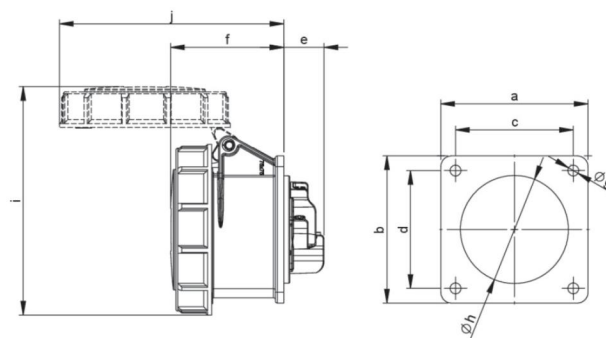

<https://www.pcelectric.at/shop/en/?func=detail&artnr=3152-6>

**www.npower.com.vn**

Tài liệu được tổng hợp bởi đội ngũ kỹ thuật của **NPOWER**  
Bản quyền nội dung thuộc về công ty **PCE**




Powered by **NAVITECH** | [www.navitech.co](http://www.navitech.co)

|                        |                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>3252-6</b>                                                                                                                                                                                                                                                                                                                                                             |
| article description    | <b>CEE-flanged socket straight (75x75mm) 32A 5p 6h IP67</b>                                                                                                                                                                                                                                                                                                               |
| description long       | CEE-flanged socket straight (75x75mm) 32A 5p 6h IP67<br>housing material: PA6<br>rated current: 32A<br>number of poles: 5 (3P+N+PE)<br>clock-position: 6h<br>rated voltage/frequency: 200/346V~ - 240/415V~ / 50+60Hz<br>contacts: brass<br>connection technology: screw terminals<br>dimensions (flange/fixing center): 75x75 mm / 60x60 mm<br>IP protection class: IP67 |
| GTIN (EAN)             | 9003399131707                                                                                                                                                                                                                                                                                                                                                             |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                                                                        |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                                                                  |
| net weight             | 0.260 kg                                                                                                                                                                                                                                                                                                                                                                  |
| packaging quantity     | 10                                                                                                                                                                                                                                                                                                                                                                        |
| minimum order quantity | 10                                                                                                                                                                                                                                                                                                                                                                        |

|                                 |                      |
|---------------------------------|----------------------|
| ETIM 9.0                        | EC001317             |
| IEC-amperage                    | 32 A                 |
| Voltage according to EN 60309-2 | 400 V (50+60 Hz) red |
| Number of poles                 | 5                    |
| Clock hour position             | 6 h                  |
| Identification colour           | Red                  |
| Degree of protection (IP)       | IP67                 |
| Connection system               | Screw terminal       |
| Angle of plug                   | Straight             |
| Material                        | Plastic              |
| Contact material                | CuZn                 |
| Surface treatment contacts      | Untreated            |
| Flange size vertical            | 75 mm                |
| Drill hole distance vertical    | 60 mm                |
| Flange size horizontal          | 75 mm                |
| Drill hole distance horizontal  | 60 mm                |

|                        |                        |
|------------------------|------------------------|
| a                      | 75 mm                  |
| b                      | 75 mm                  |
| c                      | 60 mm                  |
| d                      | 60 mm                  |
| e                      | 23 mm                  |
| f                      | 71 mm                  |
| g                      | 5,5 mm                 |
| h                      | 58 mm                  |
| i                      | 130 mm                 |
| j                      | 136 mm                 |
| wire flexible          | 2,5-6 mm <sup>2</sup>  |
| wire solid             | 2,5-10 mm <sup>2</sup> |
| contact screws         | 110 Ncm                |
| dismantling length     | 50 mm                  |
| stripping length       | 12-14 mm               |
| ambient temperature    | -25 – 40 °C            |
| temperature resistance | -25 – 80 °C            |

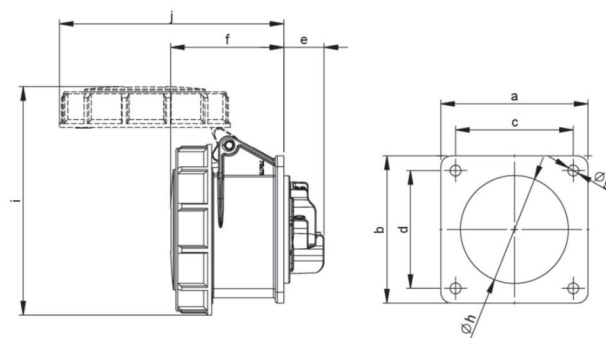

<https://www.pcelectric.at/shop/en/?func=detail&artnr=3252-6>

**www.npower.com.vn**

Tài liệu được tổng hợp bởi đội ngũ kỹ thuật của **NPOWER**  
Bản quyền nội dung thuộc về công ty **PCE**



Powered by **NAVITECH** | [www.navitech.co](http://www.navitech.co)