

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                        |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>434-6fc</b>                                                                                                                                                                                                                                                                                                                                                                                                         |
| article description    | <b>CEE-flanged socket sloping (100x107) 63A 4p 6h IP67 POWER TWIST</b>                                                                                                                                                                                                                                                                                                                                                 |
| description long       | CEE-flanged socket sloping (100x107) 63A 4p 6h IP67 POWER TWIST<br>housing material: PA6<br>rated current: 63A<br>number of poles: 4 (3P+PE)<br>clock-position: 6h<br>rated voltage/frequency: 380-415V~ / 50+60Hz<br>contacts: brass, with lamellar spring (CuBe)<br>connection technology: frame terminals with screws<br>dimensions (flange/fixing center): 100x107 mm / 77x85 mm<br>IP protection class: IP66/IP67 |
| GTIN (EAN)             | 9003399199776                                                                                                                                                                                                                                                                                                                                                                                                          |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                                                                                                                     |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                                                                                                               |
| net weight             | 0.536 kg                                                                                                                                                                                                                                                                                                                                                                                                               |
| packaging quantity     | 2                                                                                                                                                                                                                                                                                                                                                                                                                      |
| minimum order quantity | 2                                                                                                                                                                                                                                                                                                                                                                                                                      |


|                                 |                      |
|---------------------------------|----------------------|
| ETIM 9.0                        | EC001317             |
| IEC-amperage                    | 63 A                 |
| Voltage according to EN 60309-2 | 400 V (50+60 Hz) red |
| Number of poles                 | 4                    |
| Clock hour position             | 6 h                  |
| Identification colour           | Red                  |
| Degree of protection (IP)       | IP67                 |
| Connection system               | Screwed terminal     |
| Angle of plug                   | Angled               |
| Material                        | Plastic              |
| Contact material                | CuZn                 |
| Surface treatment contacts      | Untreated            |
| Flange size vertical            | 107 mm               |
| Drill hole distance vertical    | 85 mm                |
| Flange size horizontal          | 100 mm               |
| Drill hole distance horizontal  | 77 mm                |

|                        |                      |
|------------------------|----------------------|
| a                      | 100 mm               |
| b                      | 107 mm               |
| c                      | 77 mm                |
| d                      | 85 mm                |
| e                      | 64 mm                |
| f                      | 80 mm                |
| g                      | 92 mm                |
| h                      | 82 mm                |
| i                      | 7 mm                 |
| j                      | 148 mm               |
| k                      | 154 mm               |
| wire flexible          | 6-16 mm <sup>2</sup> |
| wire solid             | 6-25 mm <sup>2</sup> |
| contact screws         | 200 Ncm              |
| dismantling length     | 100 mm               |
| stripping length       | 15-18 mm             |
| ambient temperature    | -25 – 40 °C          |
| temperature resistance | -25 – 80 °C          |
| IK-code *)             | IK10                 |



\*) The IK-test is not part of the IEC 60309 standard for industrial plugs and socket-outlets or the IEC 60884 standard for household plugs and socket-outlets. PC Electric GmbH has therefore

tested the IK-codes of these products in accordance with IEC 62262 and according to the test method of IEC 60068-2-75 Ehc, with conditioning for 48 hours at 40°C and a relative humidity of 95%.

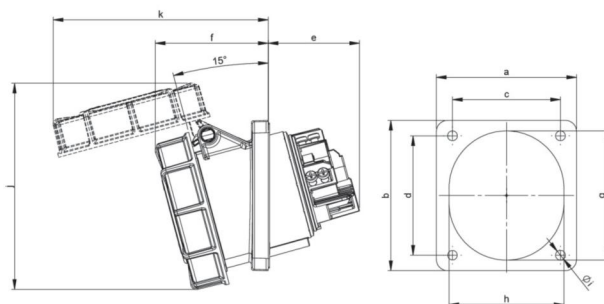

<https://www.pcelectric.at/shop/en/?func=detail&artnr=434-6fc>

**www.npower.com.vn**

Tài liệu được tổng hợp bởi đội ngũ kỹ thuật của **NPOWER**  
Bản quyền nội dung thuộc về công ty **PCE**




Powered by **NAVITECH** | [www.navitech.co](http://www.navitech.co)

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| article#               | <b>444-6</b>                                                                                                                                                                                                                                                                                                                                                                                                              |
| article description    | <b>CEE-flanged socket sloping (120x130) 125A 4p 6h IP67 POWER TWIST</b>                                                                                                                                                                                                                                                                                                                                                   |
| description long       | CEE-flanged socket sloping (120x130) 125A4p 6h IP67 POWER TWIST<br>housing material: PA6<br>rated current: 125A<br>number of poles: 4 (3P+PE)<br>clock-position: 6h<br>rated voltage/frequency: 380-415V~ / 50+60Hz<br>contacts: brass, with lamellar spring (CuBe)<br>connection technology: frame terminals with screws<br>dimensions (flange/fixing center): 120x130 mm / 100x108 mm<br>IP protection class: IP66/IP67 |
| GTIN (EAN)             | 9003399035371                                                                                                                                                                                                                                                                                                                                                                                                             |
| country of origin      | AT                                                                                                                                                                                                                                                                                                                                                                                                                        |
| customs number         | 85366990                                                                                                                                                                                                                                                                                                                                                                                                                  |
| net weight             | 0.896 kg                                                                                                                                                                                                                                                                                                                                                                                                                  |
| packaging quantity     | 2                                                                                                                                                                                                                                                                                                                                                                                                                         |
| minimum order quantity | 2                                                                                                                                                                                                                                                                                                                                                                                                                         |

|                                 |                      |
|---------------------------------|----------------------|
| ETIM 9.0                        | EC001317             |
| IEC-amperage                    | 125 A                |
| Voltage according to EN 60309-2 | 400 V (50+60 Hz) red |
| Number of poles                 | 4                    |
| Clock hour position             | 6 h                  |
| Identification colour           | Red                  |
| Degree of protection (IP)       | IP67                 |
| Connection system               | Screwed terminal     |
| Angle of plug                   | Angled               |
| Material                        | Plastic              |
| Contact material                | CuZn                 |
| Surface treatment contacts      | Untreated            |
| Flange size vertical            | 130 mm               |
| Drill hole distance vertical    | 108 mm               |
| Flange size horizontal          | 120 mm               |
| Drill hole distance horizontal  | 100 mm               |

|                        |                       |
|------------------------|-----------------------|
| a                      | 120 mm                |
| b                      | 130 mm                |
| c                      | 100 mm                |
| d                      | 108 mm                |
| e                      | 92 mm                 |
| f                      | 77 mm                 |
| g                      | 102 mm                |
| h                      | 90 mm                 |
| i                      | 7 mm                  |
| j                      | 160 mm                |
| k                      | 162 mm                |
| wire flexible          | 16-50 mm <sup>2</sup> |
| wire solid             | 16-70 mm <sup>2</sup> |
| contact screws         | 450 Ncm               |
| dismantling length     | 100 mm                |
| stripping length       | 24-27 mm              |
| ambient temperature    | -25 – 40 °C           |
| temperature resistance | -25 – 80 °C           |

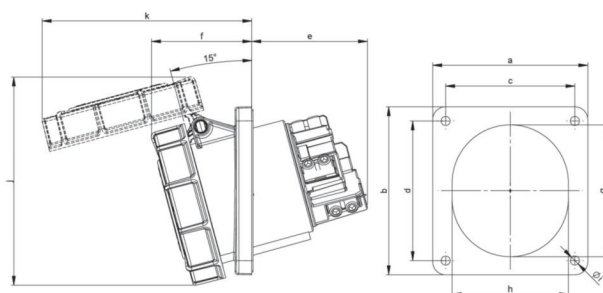

<https://www.pcelectric.at/shop/en/?func=detail&artnr=444-6>

**www.npower.com.vn**

Tài liệu được tổng hợp bởi đội ngũ kỹ thuật của **NPOWER**  
Bản quyền nội dung thuộc về công ty **PCE**



Powered by **NAVITECH** | [www.navitech.co](http://www.navitech.co)