

PGG 3/1

Petrol-powered, with 2.8 kW power, puncture-proof wheels and 15 litre tank: Synchronous generator PGG 3/1 for up to 12 hours independent of external power sources in many different areas of use.



V
Stage V



Order no.

1.042-207.0

- Foldable push handle and puncture-proof tyres with robust cage frame
- Convenient electric start function with key switch

Technical data

| | | |
|----------------------------|-----------------|-----------------|
| EAN code | 4054278547923 | |
| Power supply | Ph / V | 1 / 230 |
| Sound pressure level | dB(A) | 74 |
| Nominal power | kW | 2.8 |
| Power | kW | 3 |
| Drive type | | Petrol |
| Displacement | cm ³ | 208 |
| Motor rating | kW / hp | 4 / 5.4 |
| Fuel consumption | l/h | 2.3 |
| Tank capacity | l | 15 |
| Runtime at 50% output | h | 12 |
| Runtime at 100% output | h | 6.5 |
| Weight incl. packaging | kg | 56.1 |
| Weight without accessories | kg | 51.7 |
| Dimensions (L x W x H) | mm | 645 x 622 x 549 |

Equipment

| | |
|-------------------------------------|-------------------------------------|
| Operating state display | <input checked="" type="checkbox"/> |
| DC output (12 V) | <input checked="" type="checkbox"/> |
| Protection class IP 23 | <input checked="" type="checkbox"/> |
| Low oil and overload protection | <input checked="" type="checkbox"/> |
| Fuel gauge | <input checked="" type="checkbox"/> |
| Single phase socket type F (Schuko) | <input checked="" type="checkbox"/> |
| Automatic Voltage Regulation (AVR) | <input checked="" type="checkbox"/> |

■ Included in the scope of supply.






Extraordinary ease of use

- High mobility thanks to the foldable push handle and puncture-proof wheels.
- Electro start function for the convenient and quick start of the petrol engine.



Ultimate reliability and safety

- With overload and oil shortage protection as well as tubular steel frame for maximum safety.
- With automatic voltage regulator (AVR) for the operation of sensitive electronic devices.

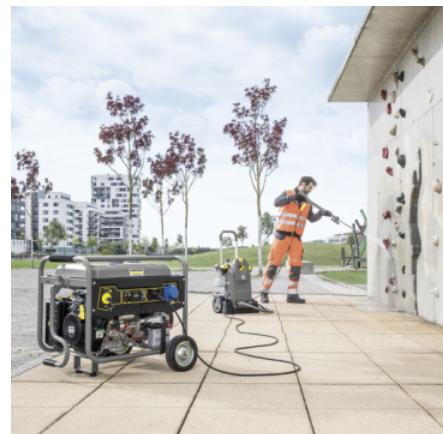

Operation of Kärcher high-pressure cleaners

- Enables the use of high-pressure cleaners in areas without external power supply.
- Suitable for selected single-phase high-pressure cleaners.