

## PGG 6/1

With a power rating of 5 kW, the petrol-operated synchronous generator PGG 6/1 impresses with up to 10 hours of independent power supply in many commercial and municipal applications.



V  
Stage V



Order no.

1.042-208.0

- Foldable push handle and puncture-proof tyres with robust cage frame
- Convenient electric start function with key switch

### Technical data

EAN code	4054278547930	
Power supply	Ph / V	1 / 230
Sound pressure level	dB(A)	75
Nominal power	kW	5
Power	kW	5.5
Drive type		Petrol
Displacement	cm <sup>3</sup>	390
Motor rating	kW / hp	8.5 / 11.6
Fuel consumption	l/h	3.8
Tank capacity	l	25
Runtime at 50% output	h	10
Runtime at 100% output	h	6.5
Weight incl. packaging	kg	92.4
Weight without accessories	kg	84.7
Dimensions (L x W x H)	mm	743 x 713 x 670

### Equipment

Operating state display	<input checked="" type="checkbox"/>
DC output (12 V)	<input checked="" type="checkbox"/>
Protection class IP 23	<input checked="" type="checkbox"/>
Low oil and overload protection	<input checked="" type="checkbox"/>
Fuel gauge	<input checked="" type="checkbox"/>
2 single phase sockets type F (Schuko)	<input checked="" type="checkbox"/>
Single phase CEE socket (32 A)	<input checked="" type="checkbox"/>
Automatic Voltage Regulation (AVR)	<input checked="" type="checkbox"/>

■ Included in the scope of supply.

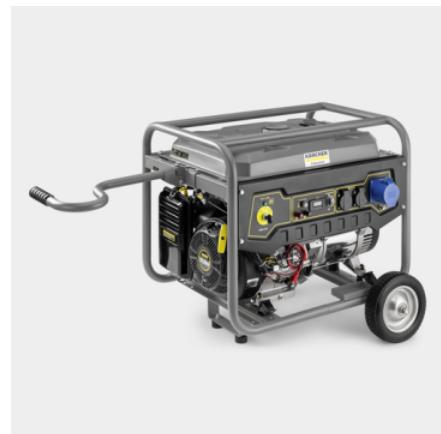


**Extraordinary ease of use**

- Puncture-proof wheels guarantee permanently high mobility.
- Electro start function for the convenient and quick start of the petrol engine.

**Ultimate reliability and safety**

- With automatic voltage regulator (AVR), which supplies a largely constant voltage.

**Very powerful**

- 230 V synchronous generator reliably provides continuous power of 5.5 kW.
- Powerful petrol engine for applications of min. 6.5 hours per tank filling.

