

Product Information

71 72 460

Bolt Cutter



- Cutting capacity up to 48 HRC hardness
- Robust cutting edges are additionally induction-hardened, cutting edge hardness approx. 62 HRC
- Forged-in stopper with comfortable shock-absorber
- Good access due to very flat construction of head and joint area
- Ergonomically angled handles to minimise effort
- Sturdy non-slip two-colour multi-component handle sleeves
- Precise adjustment (12 positions) by eccentric bolt
- High cutting performance with minimum effort due to optimum coordination of the cutting edge angle and transmission ratio
- Bolted cutter head, replaceable



General	
Article No.	71 72 460
EAN	4003773066750
Head	grey atramentized
Handles	with multi-component handles
Weight	2,100 g
Dimensions	460 x 119 x 34 mm
REACH compliant	does not contain SVHC
RoHS compliant	not applicable
Technical details	
HRC 19	Ø 8 mm
HRC 40	Ø 6 mm
HRC 48	Ø 5 mm
Cutting edge length mm	30 mm
Head thickness	33 mm


Technical changes and errors excepted

www.npower.com.vn

Tài liệu được tổng hợp bởi đội ngũ kỹ thuật của **NPOWER**
Bản quyền nội dung thuộc về công ty **KNIPEX**



Powered by **NAVITECH** | www.navitech.co

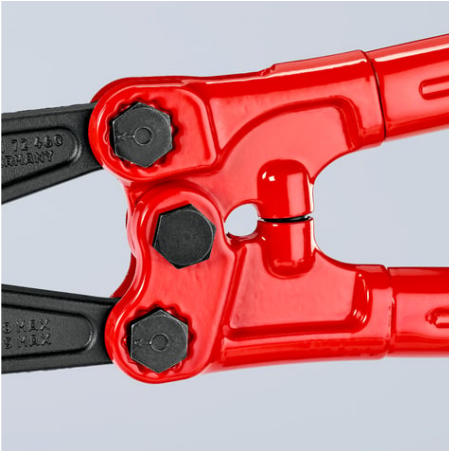



Product Information

71 72 610



Bolt Cutter

- Cutting capacity up to 48 HRC hardness
- Robust cutting edges are additionally induction-hardened, cutting edge hardness approx. 62 HRC
- Forged-in stopper with comfortable shock-absorber
- Good access due to very flat construction of head and joint area
- Ergonomically angled handles to minimise effort
- Sturdy non-slip two-colour multi-component handle sleeves
- Precise adjustment (12 positions) by eccentric bolt
- High cutting performance with minimum effort due to optimum coordination of the cutting edge angle and transmission ratio
- Bolted cutter head, replaceable



General	
Article No.	71 72 610
EAN	4003773066767
Head	grey afromentized
Handles	with multi-component handles
Weight	2,550 g
Dimensions	610 x 122 x 34 mm
REACH compliant	does not contain SVHC
RoHS compliant	not applicable
Technical details	
HRC 19	Ø 9 mm
HRC 40	Ø 8 mm
HRC 48	Ø 7 mm
Cutting edge length mm	34 mm
Head thickness	33 mm

Technical changes and errors excepted

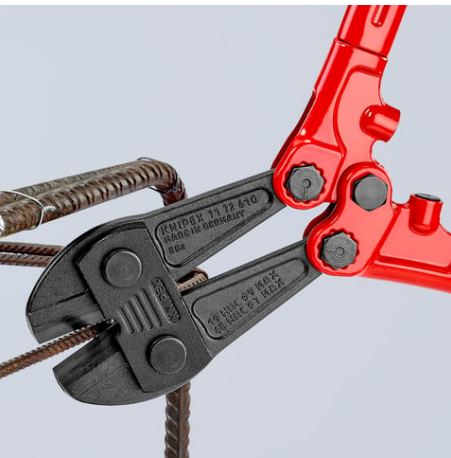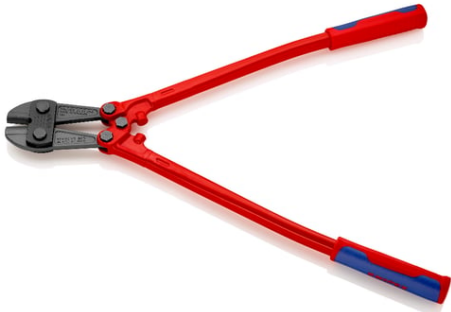



Product Information

71 72 760


Bolt Cutter

- Cutting capacity up to 48 HRC hardness
- Robust cutting edges are additionally induction-hardened, cutting edge hardness approx. 62 HRC
- Forged-in stopper with comfortable shock-absorber
- Good access due to very flat construction of head and joint area
- Ergonomically angled handles to minimise effort
- Sturdy non-slip two-colour multi-component handle sleeves
- Precise adjustment (12 positions) by eccentric bolt
- High cutting performance with minimum effort due to optimum coordination of the cutting edge angle and transmission ratio
- Bolted cutter head, replaceable



General	
Article No.	71 72 760
EAN	4003773066774
Head	grey atramentized
Handles	with multi-component handles
Weight	4,250 g
Dimensions	760 x 154 x 42 mm
REACH compliant	does not contain SVHC
RoHS compliant	not applicable
Technical details	
HRC 19	Ø 11 mm
HRC 40	Ø 9 mm
HRC 48	Ø 8 mm
Cutting edge length mm	36.5 mm
Head thickness	42 mm

Technical changes and errors excepted

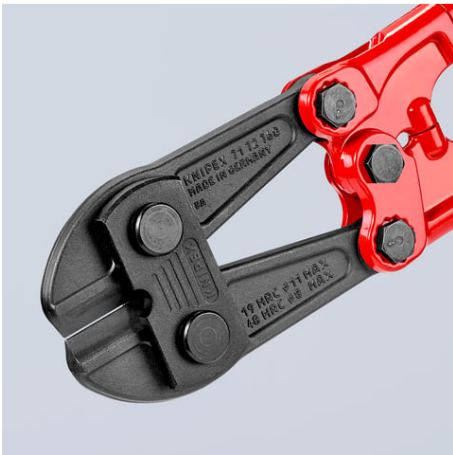



Product Information

71 72 910

Bolt Cutter

- Cutting capacity up to 48 HRC hardness
- Robust cutting edges are additionally induction-hardened, cutting edge hardness approx. 62 HRC
- Forged-in stopper with comfortable shock-absorber
- Good access due to very flat construction of head and joint area
- Ergonomically angled handles to minimise effort
- Sturdy non-slip two-colour multi-component handle sleeves
- Precise adjustment (12 positions) by eccentric bolt
- High cutting performance with minimum effort due to optimum coordination of the cutting edge angle and transmission ratio
- Bolted cutter head, replaceable



General	
Article No.	71 72 910
EAN	4003773066781
Head	grey atramentized
Handles	with multi-component handles
Weight	4,950 g
Dimensions	910 x 170 x 42 mm
REACH compliant	does not contain SVHC
RoHS compliant	not applicable
Technical details	
HRC 19	Ø 13 mm
HRC 40	Ø 10 mm
HRC 48	Ø 9 mm
Cutting edge length mm	46 mm
Head thickness	42 mm

Technical changes and errors excepted

