

Product Information

74 05 140

High Leverage Diagonal Cutter

- For very tough, continuous use
- High cutting performance with minimum effort due to optimum coordination of the cutting edge angle and transmission ratio
- Precision cutting edges also induction-hardened (hardness approx. 64 HRC), for all wire types including piano wire



General	
Article No.	74 05 140
EAN	4003773039617
pliers	chrome-plated
Head	chrome-plated
Handles	with multi-component handles
Weight	157 g
Dimensions	140 x 54 x 20 mm
Standard	DIN ISO 5749
REACH compliant	does not contain SVHC
RoHS compliant	not applicable
Technical details	
Cutting capacities soft wire (diameter)	∅
Cutting capacities medium hard wire (diameter)	∅ 3.1 mm
Cutting capacities hard wire (diameter)	∅ 2.0 mm
Cutting capacities piano wire (diameter)	∅ 1.5 mm

Technical changes and errors excepted

www.npower.com.vn

Tài liệu được tổng hợp bởi đội ngũ kỹ thuật của **NPOWER**
Bản quyền nội dung thuộc về công ty **KNIPEX**





Product Information

74 05 160

High Leverage Diagonal Cutter

- For very tough, continuous use
- High cutting performance with minimum effort due to optimum coordination of the cutting edge angle and transmission ratio
- Precision cutting edges also induction-hardened (hardness approx. 64 HRC), for all wire types including piano wire



General

Article No.	74 05 160
EAN	4003773022961
pliers	chrome-plated
Head	chrome-plated
Handles	with multi-component handles
Weight	209 g
Dimensions	160 x 56 x 22 mm
Standard	DIN ISO 5749
REACH compliant	does not contain SVHC
RoHS compliant	not applicable

Technical details

Cutting capacities soft wire (diameter)	Ø
Cutting capacities medium hard wire (diameter)	Ø 3.4 mm
Cutting capacities hard wire (diameter)	Ø 2.5 mm
Cutting capacities piano wire (diameter)	Ø 2.0 mm

Technical changes and errors excepted



Product Information

74 05 180

High Leverage Diagonal Cutter

- For very tough, continuous use
- High cutting performance with minimum effort due to optimum coordination of the cutting edge angle and transmission ratio
- Precision cutting edges also induction-hardened (hardness approx. 64 HRC), for all wire types including piano wire
- With comfort handles: consisting of three ergonomic components for optimized handling and equipped with two KNIPEXtend interfaces for extensions



General	
Article No.	74 05 180
EAN	4003773022978
pliers	chrome-plated
Head	chrome-plated
Handles	with comfort handles
Weight	270 g
Dimensions	180 x 54 x 20 mm
Standard	DIN ISO 5749
REACH compliant	does not contain SVHC
RoHS compliant	not applicable

Technical details	
Cutting capacities soft wire (diameter)	Ø
Cutting capacities medium hard wire (diameter)	Ø 3.8 mm
Cutting capacities hard wire (diameter)	Ø 2.7 mm
Cutting capacities piano wire (diameter)	Ø 2.2 mm

Technical changes and errors excepted



Product Information

74 05 200

High Leverage Diagonal Cutter

- For very tough, continuous use
- High cutting performance with minimum effort due to optimum coordination of the cutting edge angle and transmission ratio
- Precision cutting edges also induction-hardened (hardness approx. 64 HRC), for all wire types including piano wire
- With comfort handles: consisting of three ergonomic components for optimized handling and equipped with two KNIPEXtend interfaces for extensions







General	
Article No.	74 05 200
EAN	4003773035367
pliers	chrome-plated
Head	chrome-plated
Handles	with comfort handles
Weight	303 g
Dimensions	200 x 52 x 21 mm
Standard	DIN ISO 5749
REACH compliant	does not contain SVHC
RoHS compliant	not applicable

Technical details	
Cutting capacities soft wire (diameter)	Ø
Cutting capacities medium hard wire (diameter)	Ø 4.2 mm
Cutting capacities hard wire (diameter)	Ø 3.0 mm
Cutting capacities piano wire (diameter)	Ø 2.5 mm

Technical changes and errors excepted



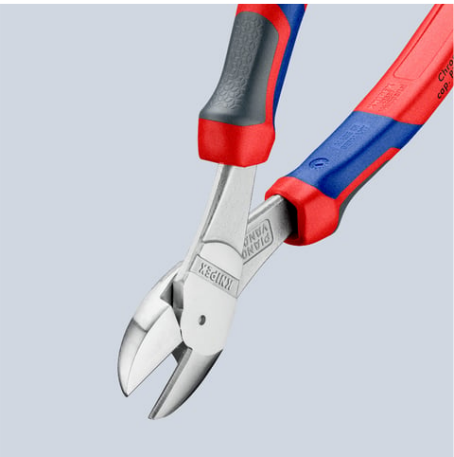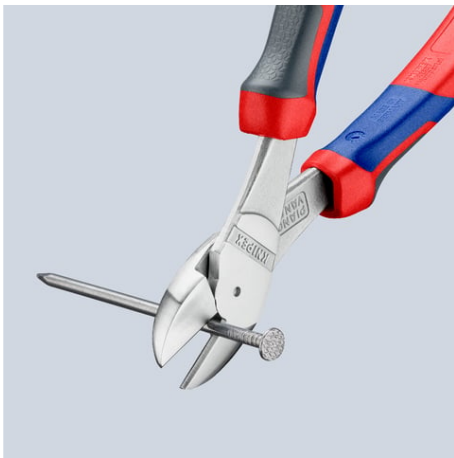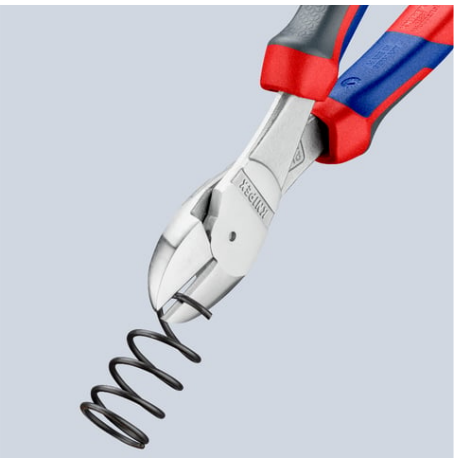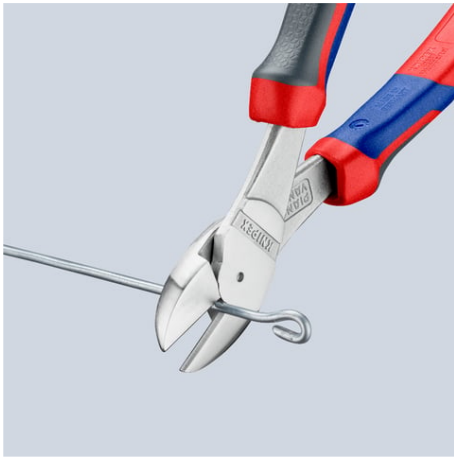

Product Information

74 05 250

High Leverage Diagonal Cutter

- For very tough, continuous use
- High cutting performance with minimum effort due to optimum coordination of the cutting edge angle and transmission ratio
- Precision cutting edges also induction-hardened (hardness approx. 64 HRC), for all wire types including piano wire



General

Article No.	74 05 250
EAN	4003773039754
pliers	chrome-plated
Head	chrome-plated
Handles	with multi-component handles
Weight	440 g
Dimensions	250 x 54 x 24 mm
Standard	DIN ISO 5749
REACH compliant	does not contain SVHC
RoHS compliant	not applicable

Technical details

Cutting capacities soft wire (diameter)	Ø
Cutting capacities medium hard wire (diameter)	Ø 4.6 mm
Cutting capacities hard wire (diameter)	Ø 3.5 mm
Cutting capacities piano wire (diameter)	Ø 3.0 mm

Technical changes and errors excepted

