

## Product Information

# 98 13 20

## Screwdriver for hexagon socket screws

- Ergonomically optimised dual component handle for fatigue reduced work and optimum transmission of force
- Handle design prevents rolling



⚡ 1000V

| General                       |                                                  |
|-------------------------------|--------------------------------------------------|
| Part No.                      | 98 13 20                                         |
| EAN                           | 4003773071693                                    |
| point                         | burnished                                        |
| Handles                       | insulated with multi-component grips, VDE-tested |
| Weight                        | 40 g                                             |
| Dimensions                    | 175 x 23 x 21 mm                                 |
| Standard                      | DIN EN 60900 IEC 60900                           |
| REACH compliant               | does not contain SVHC                            |
| RoHS compliant                | not applicable                                   |
| Technical details             |                                                  |
| Blade length                  | 75.0 mm                                          |
| Width across flats S          | 2.0 mm                                           |
| Length of non-insulated blade | 15.0 mm                                          |
| Handle length                 | 102 mm                                           |
| VDE tested                    | yes                                              |

Technical changes and errors excepted

[www.npower.com.vn](http://www.npower.com.vn)

Tài liệu được tổng hợp bởi đội ngũ kỹ thuật của **NPOWER**  
Bản quyền nội dung thuộc về **KNIPEX**






## Product Information

# 98 13 25

- Ergonomically optimised dual component handle for fatigue reduced work and optimum transmission of force
- Handle design prevents rolling

## Screwdriver for hexagon socket screws

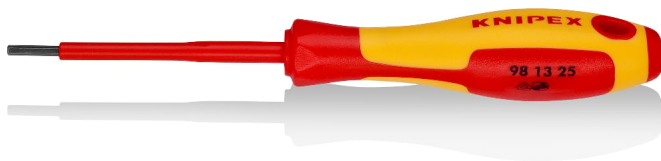

**1000V**

| General                       |                                                  |
|-------------------------------|--------------------------------------------------|
| Part No.                      | 98 13 25                                         |
| EAN                           | 4003773026334                                    |
| point                         | burnished                                        |
| Handles                       | insulated with multi-component grips, VDE-tested |
| Weight                        | 32 g                                             |
| Dimensions                    | 177 x 25 x 23 mm                                 |
| Standard                      | DIN EN 60900 IEC 60900                           |
| REACH compliant               | does not contain SVHC                            |
| RoHS compliant                | not applicable                                   |
| Technical details             |                                                  |
| Blade length                  | 75.0 mm                                          |
| Width across flats S          | 2.5 mm                                           |
| Length of non-insulated blade | 15.0 mm                                          |
| Handle length                 | 102 mm                                           |
| VDE tested                    | yes                                              |

*Technical changes and errors excepted*



## Product Information

# 98 13 30

- Ergonomically optimised dual component handle for fatigue reduced work and optimum transmission of force
- Handle design prevents rolling

## Screwdriver for hexagon socket screws



⚡ 1000V

| General                       |                                                  |
|-------------------------------|--------------------------------------------------|
| Part No.                      | 98 13 30                                         |
| EAN                           | 4003773026341                                    |
| point                         | burnished                                        |
| Handles                       | insulated with multi-component grips, VDE-tested |
| Weight                        | 49 g                                             |
| Dimensions                    | 182 x 30 x 28 mm                                 |
| Standard                      | DIN EN 60900 IEC 60900                           |
| REACH compliant               | does not contain SVHC                            |
| RoHS compliant                | not applicable                                   |
| Technical details             |                                                  |
| Blade length                  | 75.0 mm                                          |
| Width across flats S          | 3.0 mm                                           |
| Length of non-insulated blade | 15.0 mm                                          |
| Handle length                 | 107 mm                                           |
| VDE tested                    | yes                                              |

*Technical changes and errors excepted*



## Product Information

# 98 13 40

- Ergonomically optimised dual component handle for fatigue reduced work and optimum transmission of force
- Handle design prevents rolling

## Screwdriver for hexagon socket screws



⚡ 1000V

| General                       |                                                  |
|-------------------------------|--------------------------------------------------|
| Part No.                      | 98 13 40                                         |
| EAN                           | 4003773026358                                    |
| point                         | burnished                                        |
| Handles                       | insulated with multi-component grips, VDE-tested |
| Weight                        | 55 g                                             |
| Dimensions                    | 182 x 30 x 28 mm                                 |
| Standard                      | DIN EN 60900 IEC 60900                           |
| REACH compliant               | does not contain SVHC                            |
| RoHS compliant                | not applicable                                   |
| Technical details             |                                                  |
| Blade length                  | 75.0 mm                                          |
| Width across flats S          | 4.0 mm                                           |
| Length of non-insulated blade | 15.0 mm                                          |
| Handle length                 | 107 mm                                           |
| VDE tested                    | yes                                              |

*Technical changes and errors excepted*



## Product Information

# 98 13 50

- Ergonomically optimised dual component handle for fatigue reduced work and optimum transmission of force
- Handle design prevents rolling

## Screwdriver for hexagon socket screws



**1000V** 

| General                       |                                                  |
|-------------------------------|--------------------------------------------------|
| Part No.                      | 98 13 50                                         |
| EAN                           | 4003773026365                                    |
| point                         | burnished                                        |
| Handles                       | insulated with multi-component grips, VDE-tested |
| Weight                        | 82 g                                             |
| Dimensions                    | 187 x 35 x 33 mm                                 |
| Standard                      | DIN EN 60900 IEC 60900                           |
| REACH compliant               | does not contain SVHC                            |
| RoHS compliant                | not applicable                                   |
| Technical details             |                                                  |
| Blade length                  | 75.0 mm                                          |
| Width across flats S          | 5.0 mm                                           |
| Length of non-insulated blade | 15.0 mm                                          |
| Handle length                 | 112 mm                                           |
| VDE tested                    | yes                                              |

*Technical changes and errors excepted*



## Product Information

# 98 13 60

- Ergonomically optimised dual component handle for fatigue reduced work and optimum transmission of force
- Handle design prevents rolling

## Screwdriver for hexagon socket screws



**1000V**

| General                       |                                                  |
|-------------------------------|--------------------------------------------------|
| Part No.                      | 98 13 60                                         |
| EAN                           | 4003773026372                                    |
| point                         | burnished                                        |
| Handles                       | insulated with multi-component grips, VDE-tested |
| Weight                        | 98 g                                             |
| Dimensions                    | 212 x 35 x 32 mm                                 |
| Standard                      | DIN EN 60900 IEC 60900                           |
| REACH compliant               | does not contain SVHC                            |
| RoHS compliant                | not applicable                                   |
| Technical details             |                                                  |
| Blade length                  | 100.0 mm                                         |
| Width across flats S          | 6.0 mm                                           |
| Length of non-insulated blade | 15.0 mm                                          |
| Handle length                 | 112 mm                                           |
| VDE tested                    | yes                                              |

*Technical changes and errors excepted*

