

Product Information

98 20 35 SL

Screwdriver (Slim) for slotted screws

- Reduced extra slim shaft in the front area for recessed spring and screw elements
- Ergonomically optimised dual component handle for fatigue reduced work and optimum transmission of force
- Handle design prevents rolling



1000V

General	
Part No.	98 20 35 SL
EAN	4003773079712
point	burnished
Handles	insulating multi-component handle, VDE-tested
Weight	35 g
Dimensions	202 x 25 x 23 mm
Standard	DIN EN 60900 IEC 60900
REACH compliant	does not contain SVHC
RoHS compliant	not applicable
Technical details	
Blade length	100 mm
Length of non-insulated blade	15 mm
Handle length	102 mm
Blade width	3.5 mm
Blade thickness	0.6 mm
VDE tested	yes

Technical changes and errors excepted

www.npower.com.vn

Tài liệu được tổng hợp bởi đội ngũ kỹ thuật của **NPOWER**
 Bản quyền nội dung thuộc về **KNIPEX**




Product Information

98 20 40 SL

Screwdriver (Slim) for slotted screws

- Reduced extra slim shaft in the front area for recessed spring and screw elements
- Ergonomically optimised dual component handle for fatigue reduced work and optimum transmission of force
- Handle design prevents rolling

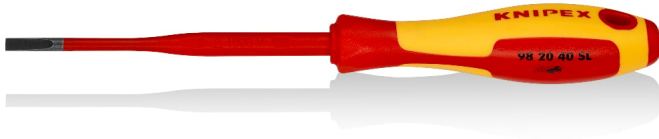

⚡ 1000V ■

General

Part No.	98 20 40 SL
EAN	4003773079729
point	burnished
Handles	insulating multi-component handle, VDE-tested
Weight	38 g
Dimensions	202 x 25 x 24 mm
Standard	DIN EN 60900 IEC 60900
REACH compliant	does not contain SVHC
RoHS compliant	not applicable

Technical details

Blade length	100 mm
Length of non-insulated blade	15 mm
Handle length	102 mm
Blade width	4.0 mm
Blade thickness	0.8 mm
VDE tested	yes

Technical changes and errors excepted

Product Information

98 20 55 SL

Screwdriver (Slim) for slotted screws

- Reduced extra slim shaft in the front area for recessed spring and screw elements
- Ergonomically optimised dual component handle for fatigue reduced work and optimum transmission of force
- Handle design prevents rolling



1000V

General	
Part No.	98 20 55 SL
EAN	4003773079736
point	burnished
Handles	insulating multi-component handle, VDE-tested
Weight	69 g
Dimensions	232 x 28 x 29 mm
Standard	DIN EN 60900 IEC 60900
REACH compliant	does not contain SVHC
RoHS compliant	not applicable
Technical details	
Blade length	125 mm
Length of non-insulated blade	15 mm
Handle length	107 mm
Blade width	5.5 mm
Blade thickness	1.0 mm
VDE tested	yes

Technical changes and errors excepted

Product Information

98 20 65 SL

Screwdriver (Slim) for slotted screws

- Reduced extra slim shaft in the front area for recessed spring and screw elements
- Ergonomically optimised dual component handle for fatigue reduced work and optimum transmission of force
- Handle design prevents rolling



⚡ 1000V ■

General	
Part No.	98 20 65 SL
EAN	4003773079743
point	burnished
Handles	insulating multi-component handle, VDE-tested
Weight	105 g
Dimensions	262 x 35 x 32 mm
Standard	DIN EN 60900 IEC 60900
REACH compliant	does not contain SVHC
RoHS compliant	not applicable
Technical details	
Blade length	150 mm
Length of non-insulated blade	15 mm
Handle length	112 mm
Blade width	6.5 mm
Blade thickness	1.2 mm
VDE tested	yes

Technical changes and errors excepted