


Product Information

98 24 00

Screwdriver for cross recessed screws

Phillips®

- Ergonomically optimised dual component handle for fatigue reduced work and optimum transmission of force
- Handle design prevents rolling

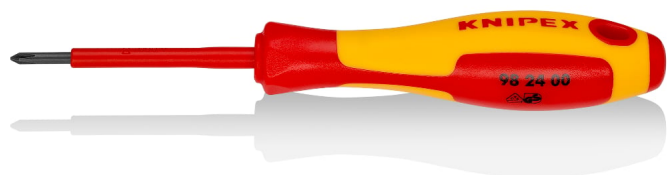

1000V

General	
Part No.	98 24 00
EAN	4003773026433
point	burnished
Handles	insulating multi-component handle, VDE-tested
Weight	32 g
Dimensions	162 x 25 x 24 mm
Standard	DIN EN 60900 IEC 60900
REACH compliant	does not contain SVHC
RoHS compliant	not applicable
Technical details	
Size	PH0
Blade length	60 mm
Handle length	102 mm
Blade Ø	3.0 mm
Length of non-insulated blade	15 mm
VDE tested	yes

Technical changes and errors excepted

www.npower.com.vn

Tài liệu được tổng hợp bởi đội ngũ kỹ thuật của **NPOWER**
Bản quyền nội dung thuộc về **KNIPEX**



Product Information

98 24 01

Screwdriver for cross recessed screws

Phillips®

- Ergonomically optimised dual component handle for fatigue reduced work and optimum transmission of force
- Handle design prevents rolling



⚡ 1000V

General	
Part No.	98 24 01
EAN	4003773026440
point	burnished
Handles	insulating multi-component handle, VDE-tested
Weight	58 g
Dimensions	187 x 30 x 30 mm
Standard	DIN EN 60900 IEC 60900
REACH compliant	does not contain SVHC
RoHS compliant	not applicable
Technical details	
Size	PH1
Blade length	80 mm
Handle length	107 mm
Blade Ø	4.5 mm
Length of non-insulated blade	15 mm
VDE tested	yes

Technical changes and errors excepted

Product Information

98 24 02

- Ergonomically optimised dual component handle for fatigue reduced work and optimum transmission of force
- Handle design prevents rolling

Screwdriver for cross recessed screws

Phillips®



 1000V

General	
Part No.	98 24 02
EAN	4003773026457
point	burnished
Handles	insulating multi-component handle, VDE-tested
Weight	94 g
Dimensions	212 x 33 x 35 mm
Standard	DIN EN 60900 IEC 60900
REACH compliant	does not contain SVHC
RoHS compliant	not applicable
Technical details	
Size	PH2
Blade length	100 mm
Handle length	112 mm
Blade Ø	6.0 mm
Length of non-insulated blade	18 mm
VDE tested	yes

Technical changes and errors excepted

Product Information

98 24 03

Screwdriver for cross recessed screws

Phillips®

- Ergonomically optimised dual component handle for fatigue reduced work and optimum transmission of force
- Handle design prevents rolling



 1000V

General	
Part No.	98 24 03
EAN	4003773026464
point	burnished
Handles	insulating multi-component handle, VDE-tested
Weight	165 g
Dimensions	270 x 39 x 36 mm
Standard	DIN EN 60900 IEC 60900
REACH compliant	does not contain SVHC
RoHS compliant	not applicable
Technical details	
Size	PH3
Blade length	150 mm
Handle length	120 mm
Blade Ø	8.0 mm
Length of non-insulated blade	18 mm
VDE tested	yes

Technical changes and errors excepted

Product Information

98 24 04

- Ergonomically optimised dual component handle for fatigue reduced work and optimum transmission of force
- Handle design prevents rolling

Screwdriver for cross recessed screws

Phillips®



1000V

General

Part No.	98 24 04
EAN	4003773026471
point	burnished
Handles	insulating multi-component handle, VDE-tested
Weight	244 g
Dimensions	320 x 37 x 36 mm
Standard	DIN EN 60900 IEC 60900
REACH compliant	does not contain SVHC
RoHS compliant	not applicable

Technical details

Size	PH4
Blade length	200 mm
Handle length	120 mm
Blade Ø	10.0 mm
Length of non-insulated blade	18 mm
VDE tested	yes

Technical changes and errors excepted