



Nylon Cable Tie

Nylon Cable Tie

Fastener

Marker , Pipe

Wire Duct

PVC Tubes

Cable Clamp
& Clip


Stainless Steel
Cable Tie

1.1 Cable Ties

1.1.1 Nylon Cable Ties

Material: PA66

Flammability rating: UL94V-2

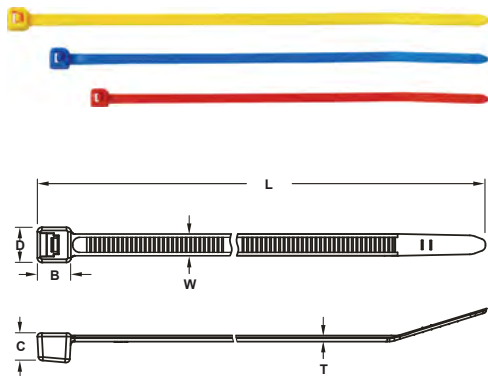

ITEM NO.	Dimension (mm)						Bundle Dia (mm)		Min Tensile Strength (lbs)	PACKING BAG
	L	W	B	C	D	T	Min	Max		
K-80M	80	2.5	4.5	3.8	4.5	1	1.6	15	18	100 PCS
K-90M	96	2.5	4.5	3.8	4.5	1	1.6	21	18	100 PCS
K-100M	100	2.5	4.5	3.8	4.5	1	1.6	22	18	100 PCS
K-120M	120	2.5	4.5	3.8	4.5	1.1	1.6	28	18	100 PCS
K-140M	142	2.5	4.5	3.8	4.5	1.1	1.6	35	18	100 PCS
K-165M	165	2.5	4.5	3.8	4.5	1.1	1.6	43	18	100 PCS
K-200M	203	2.5	4.5	3.8	4.5	1.2	1.6	53	18	100 PCS
K-140I	142	3.6	6.7	5.4	6.8	1.25	2.5	33	40	100 PCS
K-150I	150	3.6	6.7	5.4	6.8	1.25	2.5	35	40	100 PCS
K-180I	180	3.6	6.7	5.4	6.8	1.3	2.5	44	40	100 PCS
K-200I	203	3.6	6.7	5.4	6.8	1.3	2.5	52	40	100 PCS
K-250I	250	3.6	6.7	5.4	6.8	1.3	2.5	65	40	100 PCS
K-300I	300	3.6	6.7	5.4	6.8	1.35	2.5	76	40	100 PCS
K-370I	368	3.6	6.7	5.4	6.8	1.3	2.5	102	40	100 PCS
K-120S	120	4.6	7.0	6.0	7.7	1.3	3.0	22	50	100 PCS
K-160S	160	4.6	7.0	6.0	7.7	1.3	3.0	38	50	100 PCS
K-190S	190	4.6	7.0	6.0	7.7	1.3	3.0	46	50	100 PCS
K-200S	203	4.6	7.0	6.0	7.7	1.3	3.0	50	50	100 PCS
K-250S	250	4.6	7.0	6.0	7.7	1.35	3.0	65	50	100 PCS
K-280S	280	4.6	7.0	6.0	7.7	1.35	3.0	75	50	100 PCS
K-300S	300	4.6	7.4	6.0	8.3	1.4	3.0	80	50	100 PCS
K-370S	368	4.6	7.4	6.0	8.3	1.4	3.0	102	50	100 PCS
K-385S	385	4.6	7.4	6.0	8.3	1.4	3.0	105	50	100 PCS
K-430S	432	4.6	7.4	6.0	8.3	1.45	3.0	120	50	100 PCS
K-160SD	160	4.8	7.0	6.0	7.7	1.3	3.0	42	50	100 PCS
K-190SD	190	4.8	7.0	6.0	7.7	1.3	3.0	52	50	100 PCS
K-200SD	203	4.8	7.0	6.0	7.7	1.3	3.0	55	50	100 PCS
K-250SD	250	4.8	7.0	6.0	7.7	1.35	3.0	74	50	100 PCS
K-300SD	300	4.8	7.4	6.0	8.3	1.4	3.0	80	50	100 PCS
K-370SD	368	4.8	7.4	6.0	8.3	1.4	3.0	102	50	100 PCS
K-430SD	432	4.8	8.1	6.0	8.2	1.45	3.0	125	50	100 PCS
K-530SD	530	4.8	8.1	6.0	8.2	1.45	3.0	150	50	100 PCS
K-610SD	610	4.8	8.1	6.0	8.2	1.45	3.0	170	50	100 PCS
K-150H	150	7.6	11.0	6.8	12.4	1.6	4.8	33	120	100 PCS
K-200H	203	7.6	11.0	6.8	12.4	1.6	4.8	50	120	100 PCS
K-250H	250	7.6	11.0	6.8	12.4	1.6	4.8	63	120	100 PCS
K-280H	280	7.6	11.0	6.8	12.4	1.6	4.8	74	120	100 PCS
K-300H	300	7.6	11.0	6.8	12.4	1.6	4.8	80	120	100 PCS
K-340H	340	7.6	11.0	6.8	12.4	1.6	4.8	92	120	100 PCS
K-370H	370	7.6	11.0	6.8	12.4	1.6	4.8	102	120	100 PCS
K-380H	380	7.6	11.0	6.8	12.4	1.6	4.8	105	120	100 PCS
K-450H	450	7.6	11.0	6.8	12.4	1.6	4.8	128	120	100 PCS
K-500H	500	7.6	11.0	6.8	12.4	1.6	4.8	143	120	100 PCS
K-550H	550	7.6	11.0	6.8	12.4	1.6	4.8	160	120	100 PCS
K-750H	750	7.6	11.0	6.8	12.4	1.76	4.8	223	120	100 PCS
K-430L	430	9.0	13.2	9.8	14.3	1.8	8.0	116	175	100 PCS
K-450L	450	9.0	13.2	9.8	14.3	1.8	8.0	124	175	100 PCS
K-550L	550	9.0	13.2	9.8	14.3	1.8	8.0	155	175	100 PCS
K-610L	610	9.0	13.2	9.8	14.3	1.8	8.0	175	175	100 PCS
K-710L	710	9.0	13.2	9.8	14.3	1.8	8.0	207	175	100 PCS
K-780L	776	9.0	13.2	9.8	14.3	1.8	8.0	228	175	100 PCS
K-810L	812	9.0	13.2	9.8	14.3	1.8	8.0	239	175	100 PCS
K-920L	920	9.0	13.2	9.8	14.3	1.8	8.0	274	175	100 PCS
K-1020L	1020	9.0	13.2	9.8	14.3	1.8	8.0	306	175	100 PCS
K-1220L	1220	9.0	13.2	9.8	14.3	1.8	8.0	367	175	100 PCS

STANDARD COLOR :

NATURE (WHITE)

BLACK: -B

GREY: -GY

RED: -RE

BLUE: -BL

YELLOW: -YL

GREEN: -GN

ORANGE: -OR

BROWN: -BR


PURPLE: -PP

FLUORESCENCE YELLOW: -FYL



1.1.2 Weather Resistant UV Type

Material: PA66 (Ultraviolet)
Flammability rating: UL94V-2
Color: Black

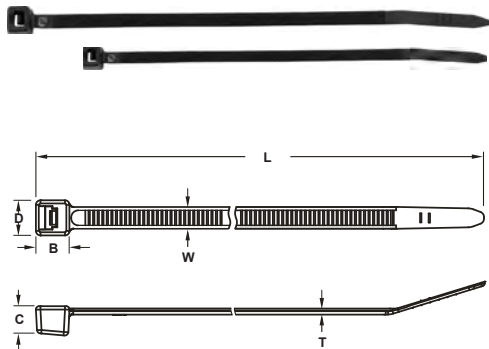

ITEM NO.	Dimension (mm)						Bundle Dia (mm)		Min Tensile Strength (lbs)	PACKING BAG
	L	W	B	C	D	T	Min	Max		
K-80MU	80	2.5	4.5	3.8	4.5	1	1.6	15	18	100 PCS
K-90MU	96	2.5	4.5	3.8	4.5	1	1.6	21	18	100 PCS
K-100MU	100	2.5	4.5	3.8	4.5	1	1.6	22	18	100 PCS
K-120MU	120	2.5	4.5	3.8	4.5	1.1	1.6	28	18	100 PCS
K-140MU	142	2.5	4.5	3.8	4.5	1.1	1.6	35	18	100 PCS
K-165MU	165	2.5	4.5	3.8	4.5	1.1	1.6	43	18	100 PCS
K-200MU	203	2.5	4.5	3.8	4.5	1.2	1.6	53	18	100 PCS
K-140IU	142	3.6	6.7	5.4	6.8	1.25	2.5	33	40	100 PCS
K-150IU	150	3.6	6.7	5.4	6.8	1.25	2.5	35	40	100 PCS
K-180IU	180	3.6	6.7	5.4	6.8	1.3	2.5	44	40	100 PCS
K-200IU	203	3.6	6.7	5.4	6.8	1.3	2.5	52	40	100 PCS
K-250IU	250	3.6	6.7	5.4	6.8	1.3	2.5	65	40	100 PCS
K-300IU	300	3.6	6.7	5.4	6.8	1.35	2.5	76	40	100 PCS
K-370IU	368	3.6	6.7	5.4	6.8	1.3	2.5	102	40	100 PCS
K-120SU	120	4.6	7.0	6.0	7.7	1.3	3.0	22	50	100 PCS
K-160SU	160	4.6	7.0	6.0	7.7	1.3	3.0	38	50	100 PCS
K-190SU	190	4.6	7.0	6.0	7.7	1.3	3.0	46	50	100 PCS
K-200SU	203	4.6	7.0	6.0	7.7	1.3	3.0	50	50	100 PCS
K-250SU	250	4.6	7.0	6.0	7.7	1.35	3.0	65	50	100 PCS
K-280SU	280	4.6	7.0	6.0	7.7	1.35	3.0	75	50	100 PCS
K-300SU	300	4.6	7.4	6.0	8.3	1.4	3.0	80	50	100 PCS
K-370SU	368	4.6	7.4	6.0	8.3	1.4	3.0	102	50	100 PCS
K-385SU	385	4.6	7.4	6.0	8.3	1.4	3.0	105	50	100 PCS
K-430SU	432	4.6	7.4	6.0	8.3	1.45	3.0	120	50	100 PCS
K-160SDU	160	4.8	7.0	6.0	7.7	1.3	3.0	42	50	100 PCS
K-190SDU	190	4.8	7.0	6.0	7.7	1.3	3.0	52	50	100 PCS
K-200SDU	203	4.8	7.0	6.0	7.7	1.3	3.0	55	50	100 PCS
K-250SDU	250	4.8	7.0	6.0	7.7	1.35	3.0	74	50	100 PCS
K-300SDU	300	4.8	7.4	6.0	8.3	1.4	3.0	80	50	100 PCS
K-370SDU	368	4.8	7.4	6.0	8.3	1.4	3.0	102	50	100 PCS
K-430SDU	432	4.8	8.1	6.0	8.2	1.45	3.0	125	50	100 PCS
K-530SDU	530	4.8	8.1	6.0	8.2	1.45	3.0	150	50	100 PCS
K-150HU	150	7.6	11.0	6.8	12.4	1.6	4.8	33	120	100 PCS
K-200HU	203	7.6	11.0	6.8	12.4	1.6	4.8	50	120	100 PCS
K-250HU	250	7.6	11.0	6.8	12.4	1.6	4.8	63	120	100 PCS
K-280HU	280	7.6	11.0	6.8	12.4	1.6	4.8	74	120	100 PCS
K-300HU	300	7.6	11.0	6.8	12.4	1.6	4.8	80	120	100 PCS
K-340HU	340	7.6	11.0	6.8	12.4	1.6	4.8	92	120	100 PCS
K-370HU	370	7.6	11.0	6.8	12.4	1.6	4.8	102	120	100 PCS
K-380HU	380	7.6	11.0	6.8	12.4	1.6	4.8	105	120	100 PCS
K-450HU	450	7.6	11.0	6.8	12.4	1.6	4.8	128	120	100 PCS
K-500HU	500	7.6	11.0	6.8	12.4	1.6	4.8	143	120	100 PCS
K-550HU	550	7.6	11.0	6.8	12.4	1.6	4.8	160	120	100 PCS
K-750HU	750	7.6	11.0	6.8	12.4	1.76	4.8	223	120	100 PCS
K-430LU	430	9.0	13.2	9.8	14.3	1.8	8.0	116	175	100 PCS
K-450LU	450	9.0	13.2	9.8	14.3	1.8	8.0	124	175	100 PCS
K-550LU	550	9.0	13.2	9.8	14.3	1.8	8.0	155	175	100 PCS
K-610LU	610	9.0	13.2	9.8	14.3	1.8	8.0	175	175	100 PCS
K-710LU	710	9.0	13.2	9.8	14.3	1.8	8.0	207	175	100 PCS
K-780LU	776	9.0	13.2	9.8	14.3	1.8	8.0	228	175	100 PCS
K-810LU	812	9.0	13.2	9.8	14.3	1.8	8.0	239	175	100 PCS
K-920LU	920	9.0	13.2	9.8	14.3	1.8	8.0	274	175	100 PCS
K-1020LU	1020	9.0	13.2	9.8	14.3	1.8	8.0	306	175	100 PCS
K-1220LU	1220	9.0	13.2	9.8	14.3	1.8	8.0	367	175	100 PCS

Nylon Cable Tie

Fastener

Marker, Pipe

Wire Duct

PVC Tubes

Cable Clamp & Clip

Stainless Steel Cable Tie



Nylon Cable Tie

Nylon Cable Tie

Fastener

Marker, Pipe

Wire Duct


PVC Tubes

Cable Clamp
& Clip

Stainless Steel
Cable Tie

1.1.3 Resistance Heat Type

Material: PA66 (Ultraviolet)
Flammability rating: UL94V-2
Color: Black / Nature
Operating Temp., °C (°F): -20°C to +120°C
Min. Install. Temp., C (F): 0°C

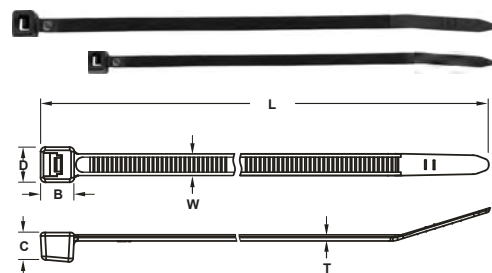


ITEM NO.	Dimension (mm)						Bundle Dia (mm)		Min Tensile Strength (lbs)	PACKING BAG
	L	W	B	C	D	T	Min	Max		
K-80MRH	80	2.5	4.5	3.8	4.5	1	1.6	15	18	100 PCS
* K-90MRH	96	2.5	4.5	3.8	4.5	1	1.6	21	18	100 PCS
K-100MRH	100	2.5	4.5	3.8	4.5	1	1.6	22	18	100 PCS
K-120MRH	120	2.5	4.5	3.8	4.5	1.1	1.6	28	18	100 PCS
K-140IRH	142	3.6	6.7	5.4	6.8	1.25	2.5	33	40	100 PCS
K-150IRH	150	3.6	6.7	5.4	6.8	1.25	2.5	35	40	100 PCS
* K-180IRH	180	3.6	6.7	5.4	6.8	1.3	2.5	44	40	100 PCS
K-200IRH	203	3.6	6.7	5.4	6.8	1.3	2.5	52	40	100 PCS
K-200SRH	203	4.6	7.0	6.0	7.7	1.3	3.0	50	50	100 PCS
* K-250SRH	250	4.6	7.0	6.0	7.7	1.35	3.0	65	50	100 PCS
* K-280SRH	280	4.6	7.0	6.0	7.7	1.35	3.0	75	50	100 PCS
K-300SRH	300	4.6	7.4	6.0	8.3	1.4	3.0	80	50	100 PCS

※ : DEVELOPING ON DEMAND

1.2 Mounting Cable Ties

Material: PA66
Flammability rating: UL94V-2

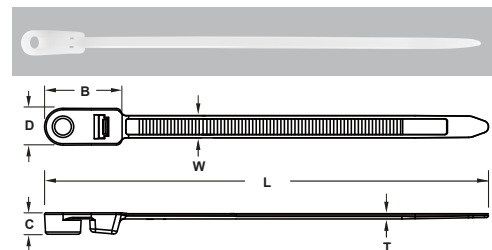


ITEM NO.	Dimension (mm)						Bundle Dia (mm)		Min Tensile Strength (lbs)	PACKING BAG
	L	W	B	C	D	T	Min	Max		
KM4-150I	150	3.6	20.1	4.5	8.1	1.25	2.5	32	40	100 PCS
KM5-200S	216	4.8	20.9	5.6	9.9	1.3	3.0	50	50	100 PCS
KM5-300S	310	4.8	20.9	5.6	9.9	1.3	3.0	80	50	100 PCS
KM5-370S	377	4.8	20.9	5.6	9.9	1.35	3.0	102	50	100 PCS
KM5-300H	313	7.6	26.4	7.3	12.4	1.8	4.8	76	120	100 PCS

1.3 Releasable Cable Ties


1.3.1 Releasable Cable Ties

Material: PA66
Flammability rating: UL94V-2

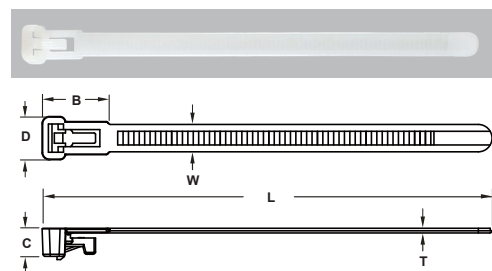

ITEM NO.	Dimension (mm)						Bundle Dia (mm)		Min Tensile Strength (lbs)	PACKING BAG
	L	W	B	C	D	T	Min	Max		
KR-125H	125	7.6	11.0	6.8	12.3	1.3	4.8	30	50	100 PCS
KR-150H	150	7.6	11.0	6.8	12.3	1.3	4.8	35	50	100 PCS
KR-200H	200	7.6	11.0	6.8	12.3	1.3	4.8	50	50	100 PCS
KR-250H	250	7.6	11.0	6.8	12.3	1.3	4.8	65	50	100 PCS
KRA-250H	250	7.6	11.0	6.8	12.3	1.3	4.8	65	50	100 PCS
KR-300H	300	7.6	11.0	6.8	12.3	1.3	4.8	80	50	100 PCS
KR-370H	370	7.6	11.0	6.8	12.3	1.3	4.8	108	50	100 PCS

Material: PA66
Flammability rating: UL94V-2

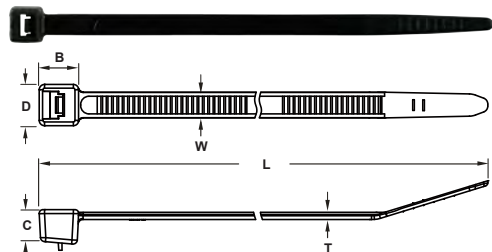

ITEM NO.	Dimension (mm)						Bundle Dia (mm)		Min Tensile Strength (lbs)	PACKING BAG
	L	W	B	C	D	T	Min	Max		
KRPA-200S	198	4.8	7.0	5.8	7.7	1.35	3.0	55	50	100 PCS
KRPA-250S	247.5	4.8	7.0	5.8	7.7	1.35	3.0	74	50	100 PCS
KRPA-300S	298	4.8	7.0	5.8	7.7	1.45	3.0	80	50	100 PCS
KRPA-370S	368	4.8	7.0	5.8	7.7	1.45	3.0	102	50	100 PCS
KRPA-450L	450	9.0	13.2	9.8	14.3	1.8	9.0	124	175	100 PCS




1.4 Heavy Duty Cable Ties

1.4.1 Nylon Cable Ties

Material: PA66

Flammability rating: UL94V-2

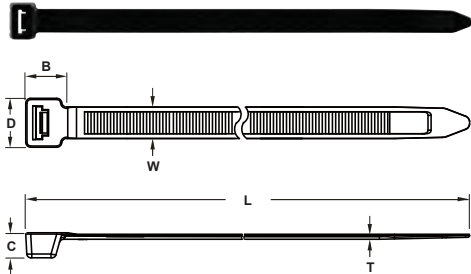


ITEM NO.	Dimension (mm)						Bundle Dia (mm)		Min Tensile Strength (lbs)	PACKING BAG
	L	W	B	C	D	T	Min	Max		
K-480X	480	12.6	14.4	10.0	19.5	2	10	120	250	100 PCS
K-580X	580	12.6	14.4	10.0	19.5	2	10	152	250	100 PCS
K-730X	730	12.6	14.4	10.0	19.5	2	10	217	250	100 PCS
K-1030X	1030	12.6	14.4	10.0	19.5	2	10	295	250	100 PCS

1.4.2 Weather Resistant UV Type

Material: PA66 (Ultraviolet)

Flammability rating: UL94V-2

Color: Black


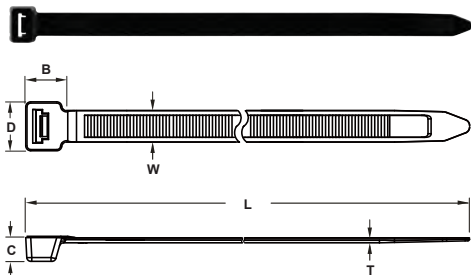


ITEM NO.	Dimension (mm)						Bundle Dia (mm)		Min Tensile Strength (lbs)	PACKING BAG
	L	W	B	C	D	T	Min	Max		
K-480XU	480	12.6	14.4	10.0	19.5	2	10	120	250	100 PCS
K-580XU	580	12.6	14.4	10.0	19.5	2	10	152	250	100 PCS
K-730XU	730	12.6	14.4	10.0	19.5	2	10	217	250	100 PCS
K-1030XU	1030	12.6	14.4	10.0	19.5	2	10	295	250	100 PCS

1.5 Markable Cable Ties

Material: PA66

Flammability rating: UL94V-2

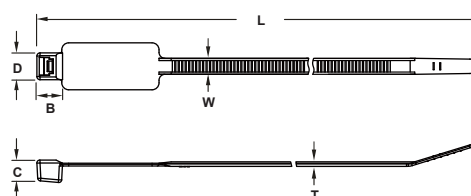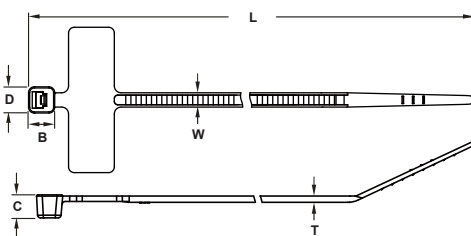

ITEM NO.	Dimension (mm)						Bundle Dia (mm)		Min Tensile Strength (lbs)	PACKING BAG
	L	W	B	C	D	T	Min	Max		
KI-100M	100	2.5	4.5	3.8	4.5	1	1.6	18	18	100 PCS

ITEM NO.	Dimension (mm)						Bundle Dia (mm)		Min Tensile Strength (lbs)	PACKING BAG
	L	W	B	C	D	T	Min	Max		
KI-200S	200	4.6	7.0	5.8	7.7	1.3	3.0	55	50	100 PCS



Nylon Cable Tie

Nylon Cable Tie

Fastener

Marker , Pipe

Wire Duct


PVC Tubes

Cable Clamp
& Clip

Stainless Steel
Cable Tie

1.5 Markable Cable Ties



Material: PA66
Flammability rating: UL94V-2

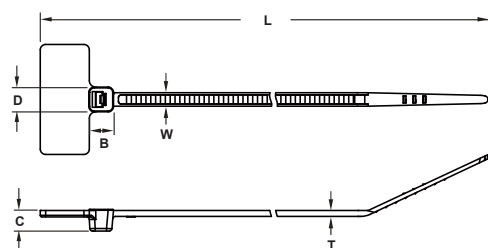



ITEM NO.	Dimension (mm)						Bundle Dia (mm)		Min Tensile Strength (lbs)	PACKING BAG
	L	W	B	C	D	T	Min	Max		
KIH-110M	112	2.5	4.5	3.8	4.5	1.1	1.6	18	18	100 PCS
KIH-210M	210	2.5	4.5	3.8	4.5	1.1	1.6	50	18	100 PCS

1.6 Plug Cable Ties


Material: PA 66
Flammability rating: UL94V-2

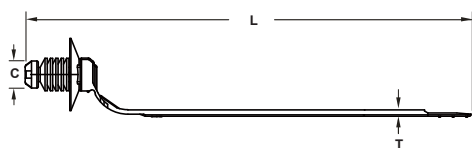



ITEM NO.	Dimension (mm)						Bundle Dia (mm)		Min Tensile Strength (lbs)	PACKING BAG
	L	W	B	C	D	T	Min	Max		
KMCL-170-B	170	5.3	15.8	7.1	7.4	1.4	1.8	30	33	100 PCS





ITEM NO.	Dimension (mm)						Bundle Dia (mm)		Min Tensile Strength (lbs)	PACKING BAG
	L	W	B	C	D	T	Min	Max		
KPM-115	115.2	6	7.9	16	16	1.3	1.8	18	34	200 PCS

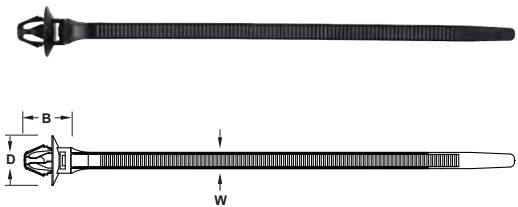


ITEM NO.	Dimension (mm)						Bundle Dia (mm)		Min Tensile Strength (lbs)	PACKING BAG
	L	W	B	C	D	T	Min	Max		
KPM-160-B	160.2	5.3	15.5	16	16	1.5	1.6	36	33	200 PCS

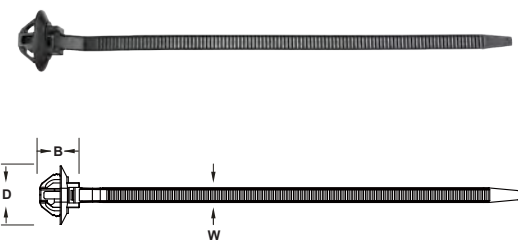

ITEM NO.	Dimension (mm)						Bundle Dia (mm)		Min Tensile Strength (lbs)	PACKING BAG
	L	W	B	C	D	T	Min	Max		
KPM-172-B	172.6	5.2	15.5	16	21	1.5	1.6	40	33	200 PCS

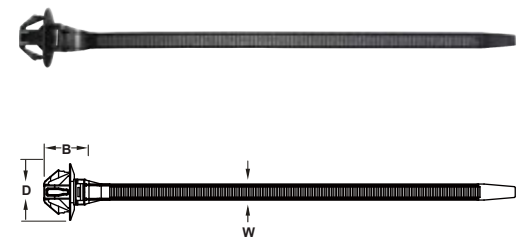

ITEM NO.	Dimension (mm)						Bundle Dia (mm)		Min Tensile Strength (lbs)	PACKING BAG
	L	W	B	C	D	T	Min	Max		
KPM-175-B	175.2	6	16.2	13	21	1.5	1.6	40	34	200 PCS





Nylon Cable Tie

Nylon Cable Tie

Fastener

Marker , Pipe

Wire Duct

PVC Tubes



Cable Clamp
& Clip

Stainless Steel
Cable Tie

1.7 Push Mount Ties

Material: PA 66

Flammability rating: UL94V-2





ITEM NO.	Dimension (mm)							Bundle Dia (mm)		Min Tensile Strength (lbs)	PACKING BAG
	L	W	B	C	D	E	T	Min	Max		
KPM-110M	110	2.5	4.5	3.8	4.5	13	1.1	1.6	28	18	100 PCS
KPM-130SD	134	4.8	7.0	5.8	7.7	17.3	1.3	3.0	25	50	100 PCS

1.8 Releasable Push Mount Ties

Material: PA 66

Flammability rating: UL94V-2





ITEM NO.	Dimension (mm)							Bundle Dia (mm)		Min Tensile Strength (lbs)	PACKING BAG
	L	W	B	F	G	H	T	Min	Max		
KRPMA-135	135	3.3	16.2	4.6	12.3	8.4	1.15	1	27	26	100 PCS

1.9 Cable Tie Push Mounts

Material: PA 66

Flammability rating: UL94V-2



ITEM NO.	Dimension (mm)				HOLE SIZE(mm)		Panel Thickness(mm)		PACKING BAG
	A	B	C	D	Min	Max	Min	Max	
9900A0462	5.0	1.2	18.6	18.0	9.7	10.0	0.8	5.0	100 PCS

1.10 Tools

KST-600A

CABLE TIE GUN FOR TENSIONING
AND CUT OFF CABLE TIES.

WIDTH: 2.4mm- 4.8mm



LY-2065


ALL METAL CONSTRUCTION CABLE TIE GUN
FOR TENSIONING AND CUT OFF CABLE TIES.

WIDTH: 2.4mm- 4.8mm



2.1 Twist Ties

Material: PA 66
Flammability rating: UL94V-2
Color: Natural (Black color are available upon request)



ITEM NO.	DIMENSION (mm)			BUNDLS DIAMETER	PACKING BAG
	A	B	C		
TT-05	5.1	20.6	1.8	4	1000 PCS
TT-08	8.0	25.4	1.8	7	1000 PCS
TT-11	11.3	29.3	1.8	10	1000 PCS
TT-15	15.0	34.0	2.0	14	1000 PCS
TT-18	18.6	40.0	2.0	17	1000 PCS
TT-24	24.0	45.5	2.0	22	1000 PCS

Nylon Cable Tie

Fastener

Marker , Pipe

Wire Duct

PVC Tubes

Cable Clamp
& Clip

Stainless Steel
Cable Tie