



Cordless Flat-head Angle Grinder  
GA055G / GA056G 125 mm (5")



**XGT**  
**40V** LI-ION  
**max**

## Efficient grinding in tight spaces



Tip access angle

**39°**



\* with 4 mm thick offset wheel


**BL** MOTOR **AFT** **XPT**



**BL MOTOR**

## AFT Active Feedback sensing Technology

Shuts down the tool, if the rotation speed suddenly slows down.

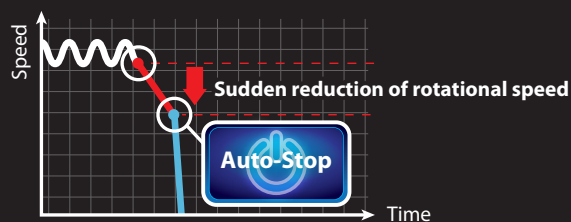

### Electric brake

Stops the wheel immediately when the switch is released.



### Anti-restart function

Prevents accidental start-up when the battery is installed while the switch is on.



### Speed adjustment dial


Allows stepless speed control from 1 to 5 to suit the application.

| Number | No load speed           |
|--------|-------------------------|
| 1      | 3,000 min <sup>-1</sup> |
| 2      | 4,500 min <sup>-1</sup> |
| 3      | 6,000 min <sup>-1</sup> |
| 4      | 7,500 min <sup>-1</sup> |
| 5      | 9,000 min <sup>-1</sup> |



### XPT eXtreme Protection Technology

High water-resistance compatible with XPT

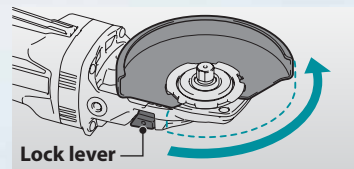

### Toolless wheel cover

Tool-less installation and removal, with angle adjustment using the lock lever.

## Accessories

### Side grip

Part No. 1910X6-8

For added comfort and control

Part No. 194514-0

Anti-vibration side grip for lower vibration



### Wheel guard (GA055G only)

Part No. 1915U6-7

Wheel cover 125ct set



## Charging Time

|                                     | Fast Charging |                |
|-------------------------------------|---------------|----------------|
|                                     | DC40RA        | DC40RC         |
| <b>BL4020</b> 2.0Ah                 | <b>22 min</b> | <b>30 min</b>  |
| <sup>*1</sup> <b>BL4025</b> 2.5Ah   | <b>28 min</b> | <b>38 min</b>  |
| <sup>*1</sup> <b>BL4040/F</b> 4.0Ah | <b>45 min</b> | <b>67 min</b>  |
| <sup>*1</sup> <b>BL4050F</b> 5.0Ah  | <b>50 min</b> | <b>85 min</b>  |
| <b>BL4080F/H</b> 8.0Ah              | <b>76 min</b> | <b>170 min</b> |

<sup>\*1</sup> Recommended battery

## Cordless Flat-head Angle Grinder

### GA055G / GA056G

Variable Speed

Brake

Anti-restart function

Soft Start

Carrying Case

<sup>\*</sup> EN62841-2-3

Wheel diameter 125 mm (5")  
Minimum access angle 39°  
No load speed 3,000 - 9,000 min<sup>-1</sup>  
Cutting depth 30 mm (1-3/16")  
Vibration level\*  
GA055G: 5.0 m/s<sup>2</sup> / GA056G: 5.1 m/s<sup>2</sup>  
GA055G: 5.9 m/s<sup>2</sup> / GA056G: 6.3 m/s<sup>2</sup>  
2.5m/s<sup>2</sup> or less

Uncertainty (K) for Vibration<sup>1</sup> 1.5m/s<sup>2</sup>  
Sound pressure level\*  
GA055G: 83 dB(A) / GA056G: 84 dB(A)  
Sound power level\*  
GA055G: 91 dB(A) / GA056G: 92 dB(A)  
Uncertainty (K) for Noise\* 3 dB(A)  
Dimensions (L x W x H) 483 x 140 x 136 mm (19 x 5-1/2 x 5-3/8")  
(Battery)  
Net weight 3.1 - 4.4 kg (6.8 - 9.7 lbs.)  
(Battery)  
BL4040F  
BL4020 - BL4080F

Standard Equipment: GA055GZ - Lock nut wrench 35 - 782423-1(1)

GA056GZ - Lock nut wrench 35 - 782423-1(1)

The net weight value includes the lightest and heaviest combination of the attachment(s) for normal and safe use and battery cartridge(s) which are specified in the instruction manual.  
Items of standard equipment and specifications may vary by country or area.