


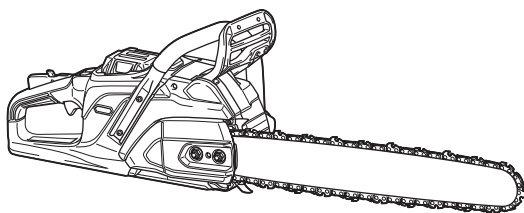

EN	Cordless Chain Saw	INSTRUCTION MANUAL	11
ZHCN	充电式链锯	使用说明书	27
ID	Gergaji Mesin Nirkabel	PETUNJUK PENGGUNAAN	44
MS	Gergaji Rantai Tanpa Kord	MANUAL ARAHAN	62
VI	Máy Cưa Xích Cầm Tay Hoạt Động Bằng Pin	TÀI LIỆU HƯỚNG DẪN	80
TH	เลื่อยไฟฟ้าไร้สาย	คู่มือการใช้งาน	96

UC030G



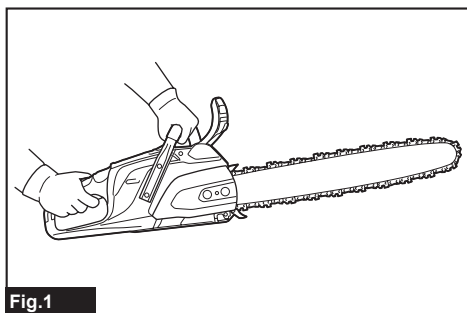


Fig.1













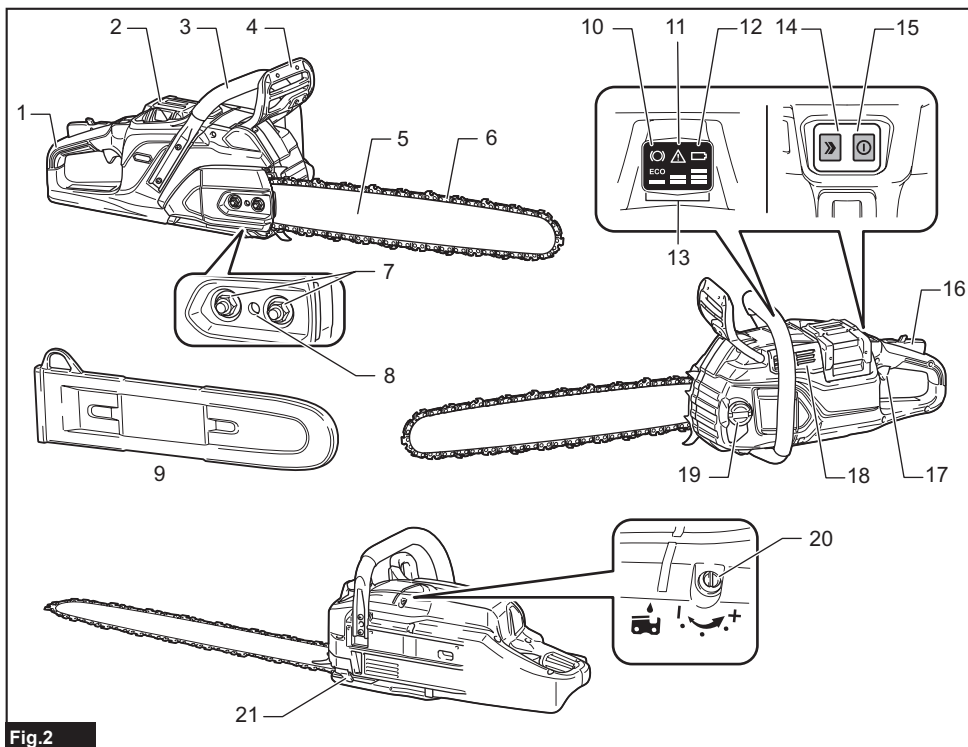








Fig.2

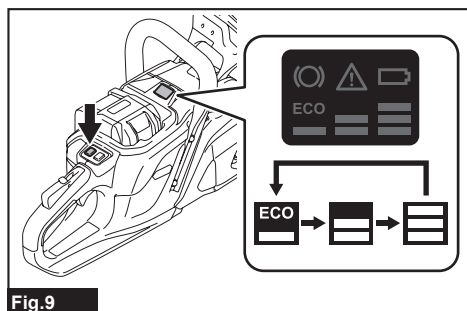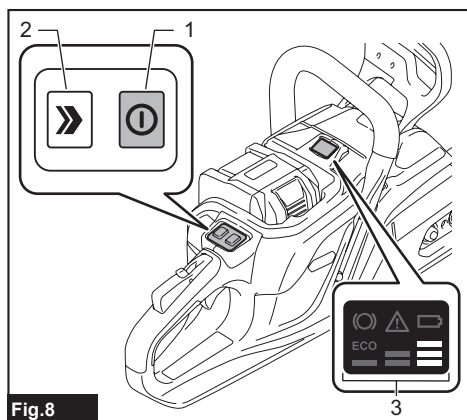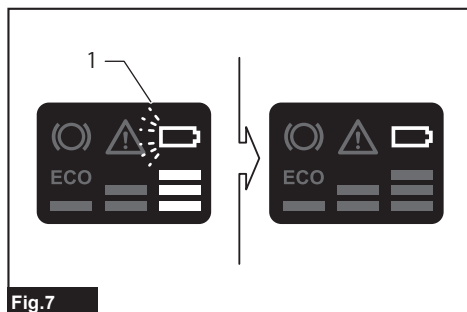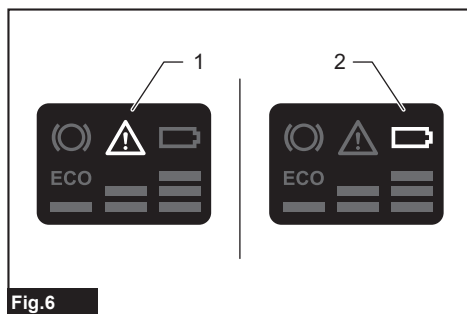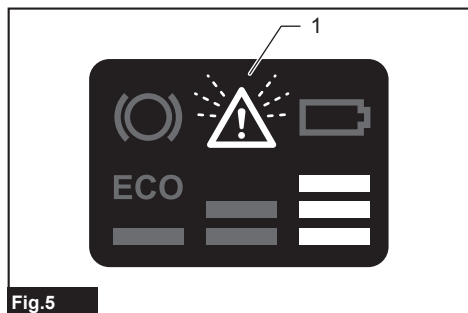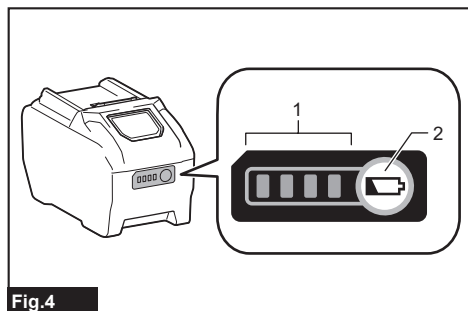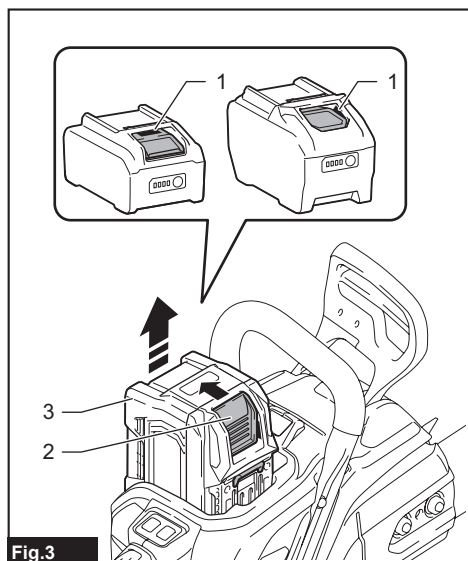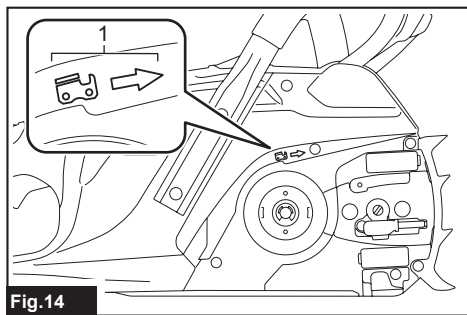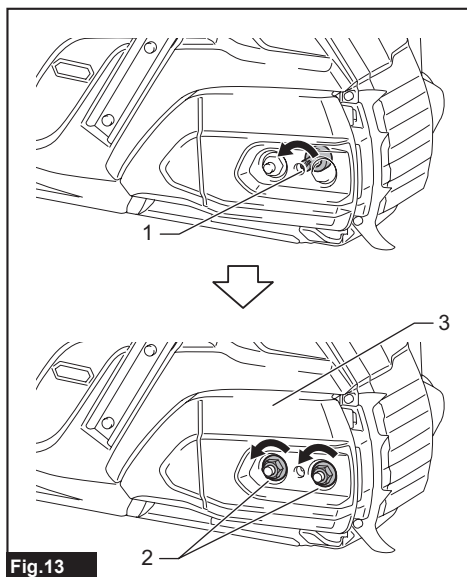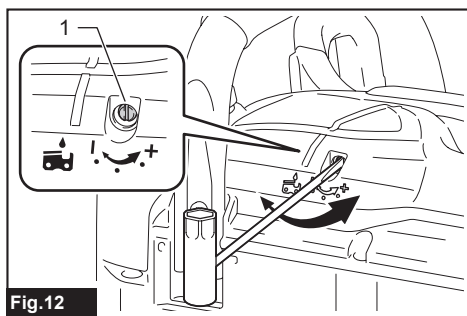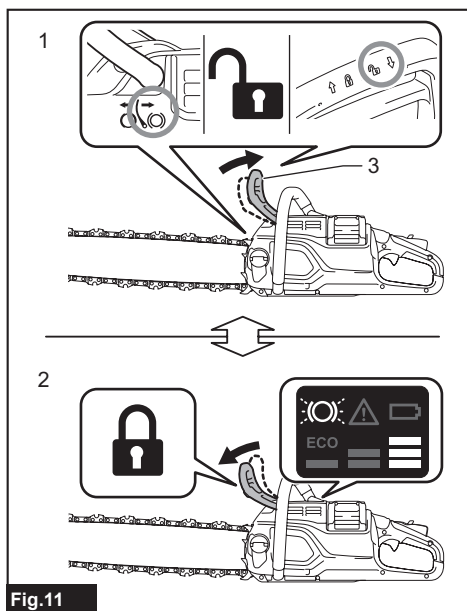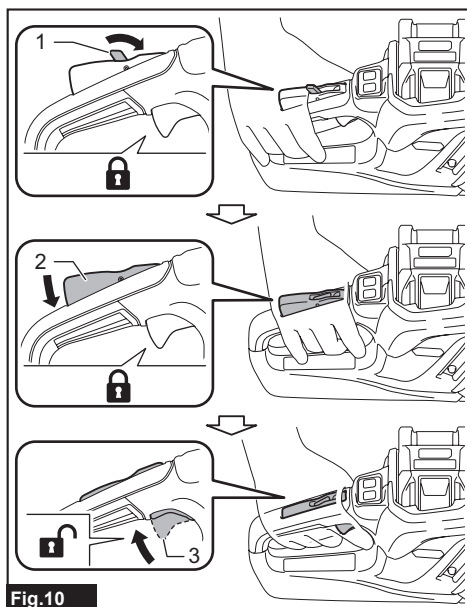

Tài liệu được tổng hợp bởi đội ngũ kỹ thuật của **NPOWER** Bản quyền nội dung thuộc về **MAKITA**
www.npower.com.vn Powered by **NAVITECH** | www.navitech.co





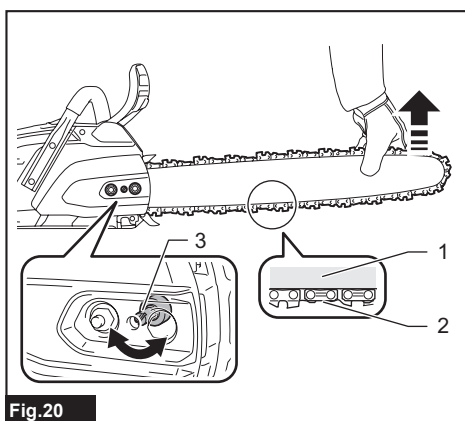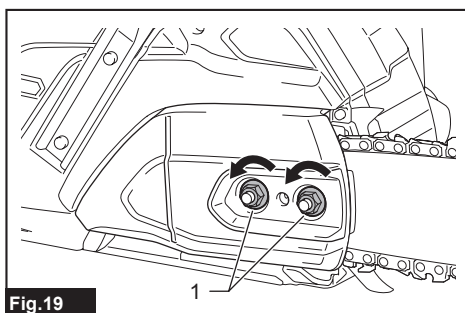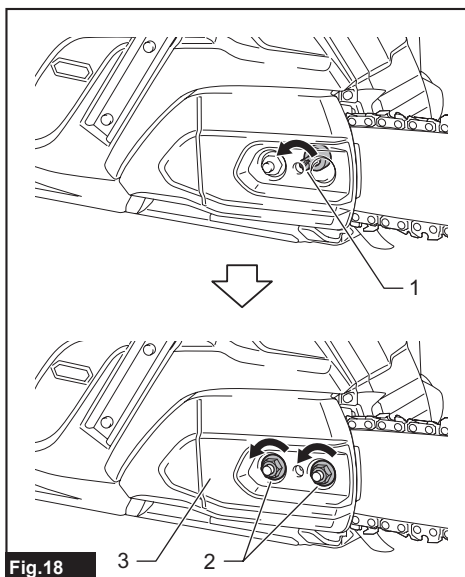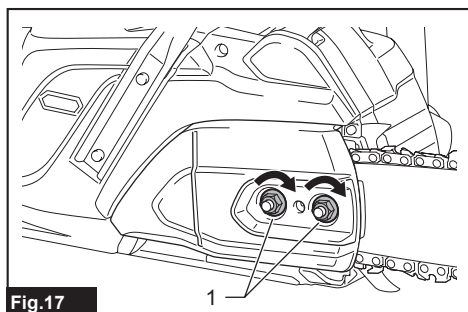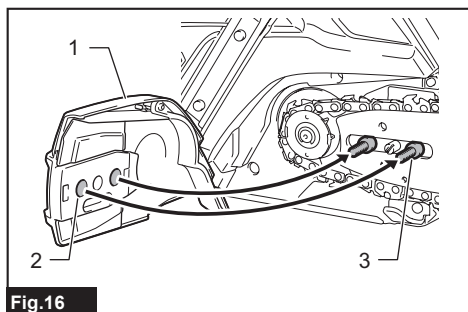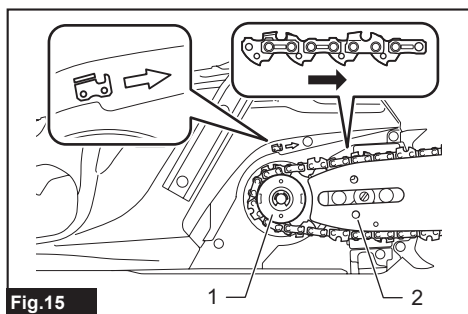

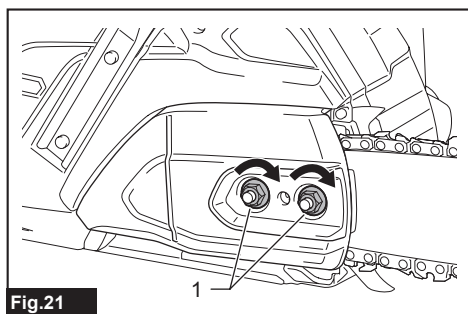


Fig.21

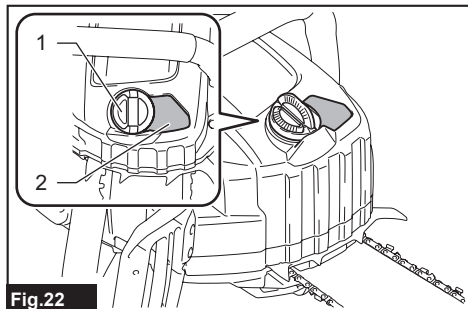


Fig.22

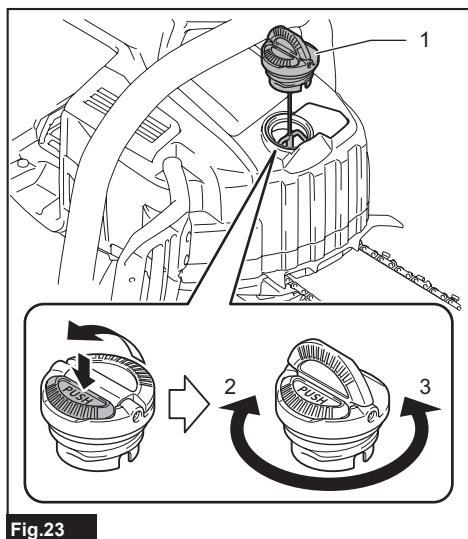


Fig.23

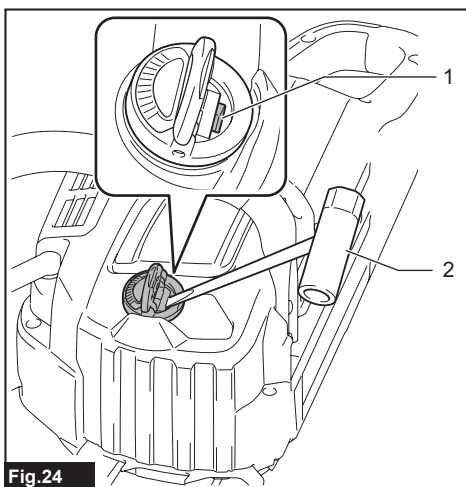


Fig.24

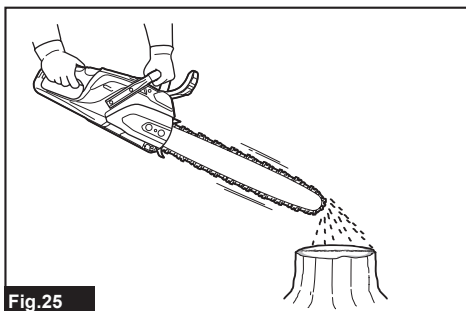


Fig.25

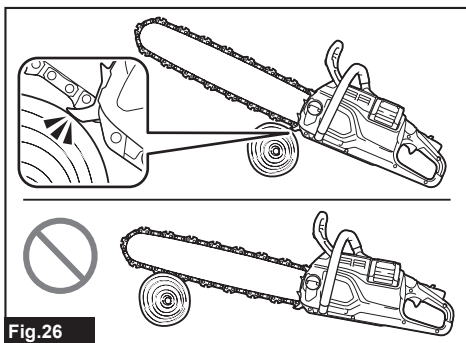
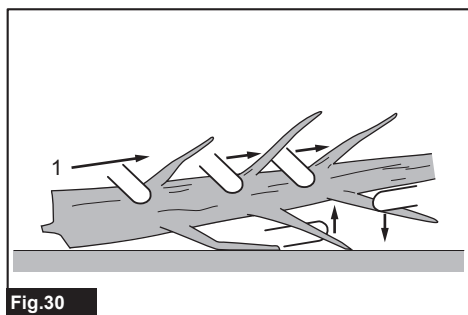
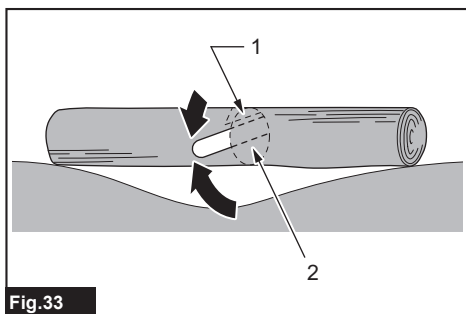
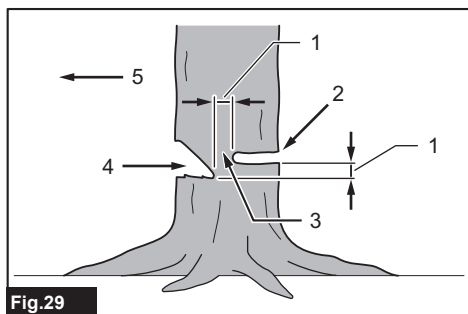
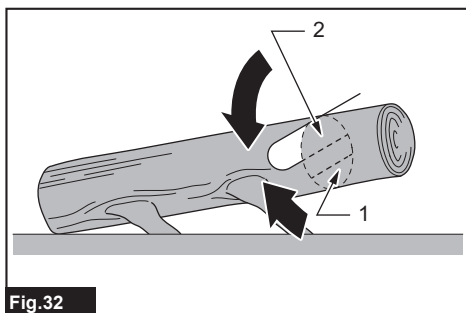
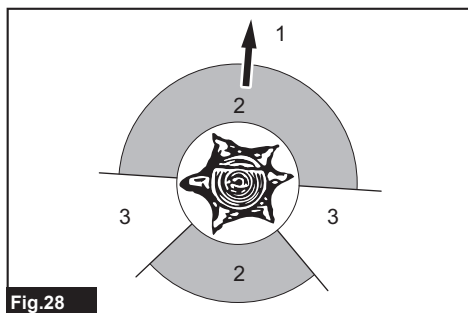
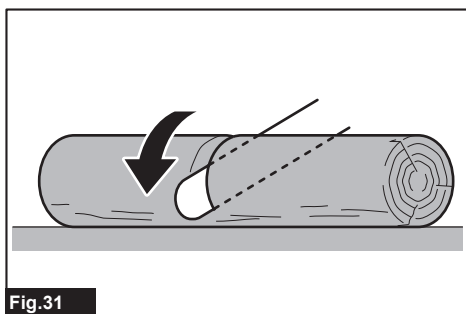
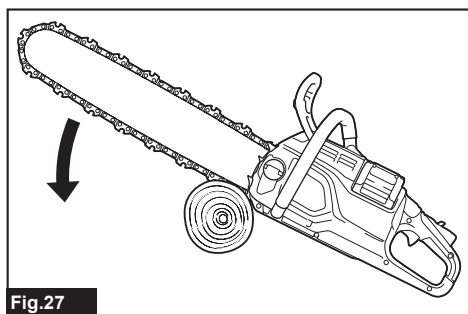


Fig.26



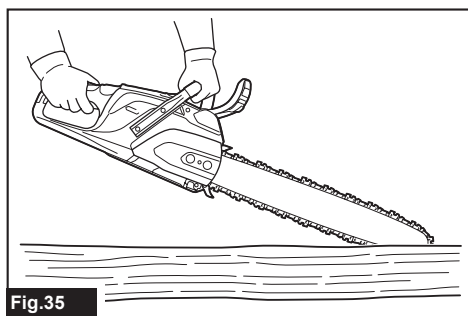


Fig.35

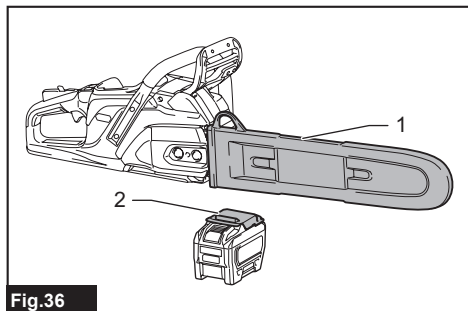


Fig.36

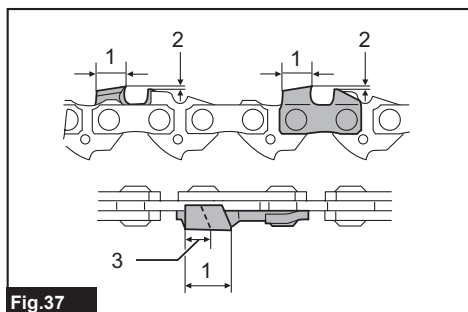


Fig.37

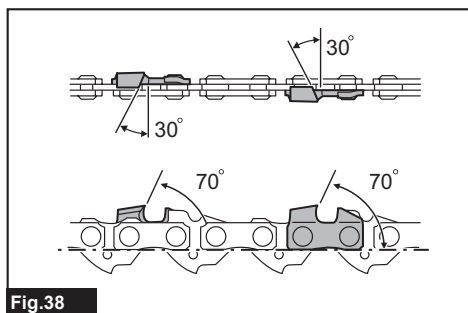


Fig.38

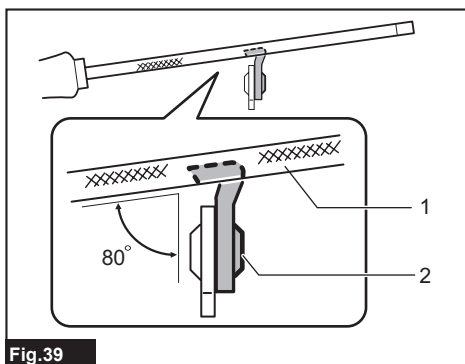


Fig.39

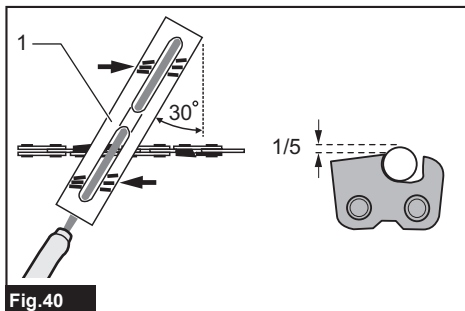


Fig.40

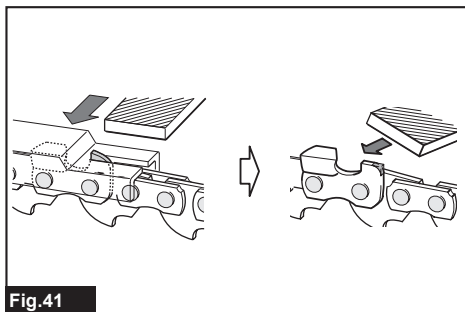


Fig.41

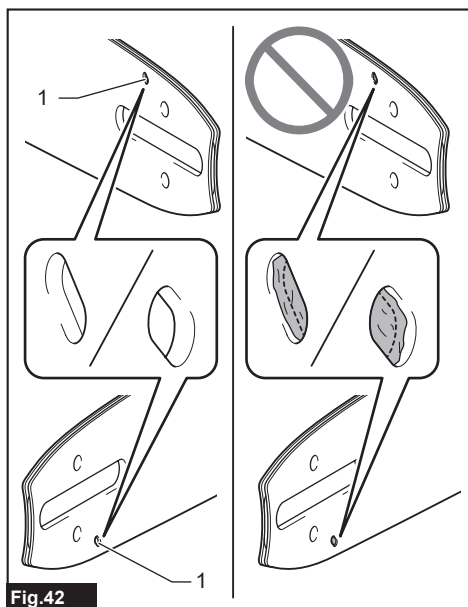


Fig.42

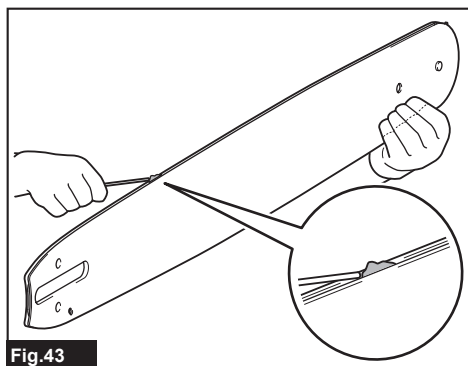


Fig.43

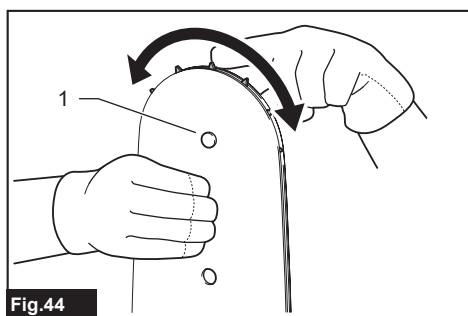


Fig.44

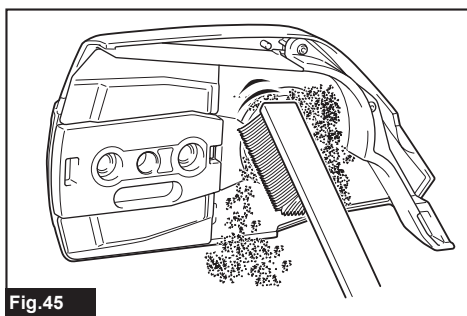


Fig.45

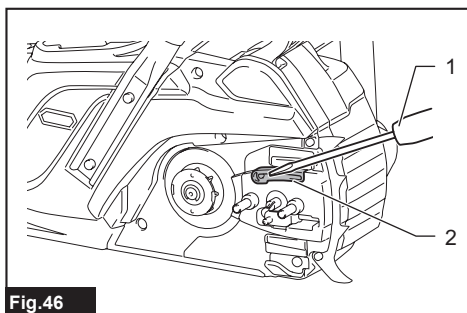


Fig.46

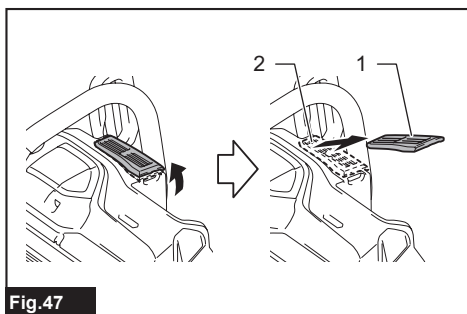


Fig.47




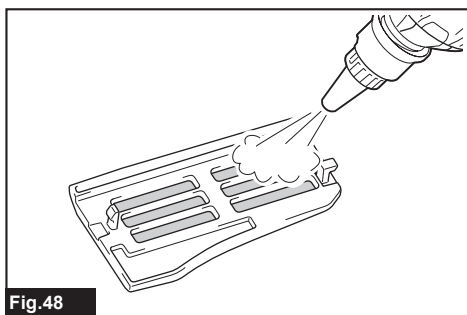


Fig.48

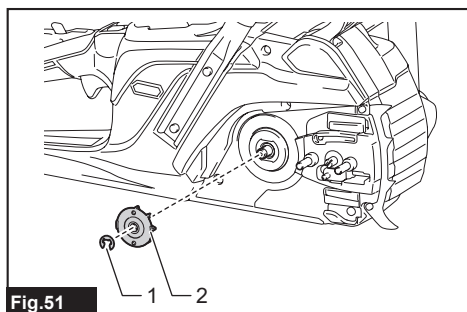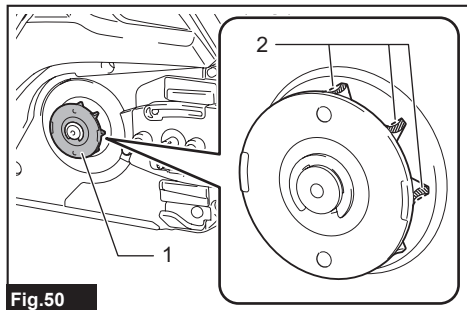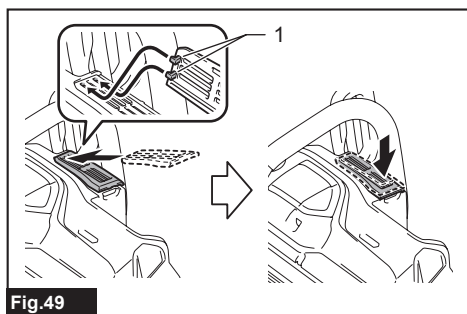

SPECIFICATIONS

Model:		UC030G	
Overall length (without saw chain and guide bar)		449 mm	
Rated voltage		D.C. 36 V - 40 V max	
Net weight	*1	4.5 kg	
	*2	6.6 - 8.0 kg	
Standard guide bar length		500 mm / 400 mm *3	Customizable
Recommended guide bar length	95TXL	400 mm / 450 mm / 500 mm	
	22BPX	500 mm	
Chain speed	Low (ECO)	0 - 20.0 m/s (0 - 1,200 m/min)	
	Medium	0 - 24.5 m/s (0 - 1,470 m/min)	
	High	0 - 29.0 m/s (0 - 1,740 m/min)	
Chain oil tank volume		260 cm ³	
Protection degree		IPX4	

- Due to our continuing program of research and development, the specifications herein are subject to change without notice.
 - Specifications may differ from country to country.
- *1: Weight, without the saw chain, guide bar, guide bar cover, oil and battery cartridge(s).
 *2: The net weight value includes the lightest and heaviest combination of the attachment(s) and battery cartridge(s) which are specified in the instruction manual.
 *3: The standard guide bar length varies depending on the country.

Saw chain, guide bar, and sprocket combination

Saw chain type		95TXL		
Number of drive links		67	74	82
Guide bar	Guide bar length	400 mm	450 mm	500 mm
	Cutting length	382 mm	439 mm	505 mm
	Pitch	0.325"		
	Gauge	1.3 mm		
	Type	Sprocket nose bar		
Sprocket	Number of teeth	8		
	Pitch	0.325"		

Saw chain type		22BPX		
Number of drive links		82		
Guide bar	Guide bar length	500 mm		
	Cutting length	496 mm		
	Pitch	0.325"		
	Gauge	1.6 mm		
	Type	Sprocket nose bar		
Sprocket	Number of teeth	8		
	Pitch	0.325"		

⚠ WARNING: Use appropriate combination of the guide bar and saw chain. Otherwise personal injury may result.