

Gauge Blocks

Gauge Blocks with a Calibrated Coefficient of Thermal Expansion

- The products are the highest-quality gauge blocks exceeding Grade K and are provided with highly accurate thermal expansion coefficient data. They help minimize thermal correction and therefore are suitable for highly accurate calibration. (Uncertainty of thermal expansion coefficient: $0.035 \times 10^{-6}/K$ ($k=2$))
- The thermal expansion coefficient is measured with a highly accurate double-faced interferometer (DFI), and the dimensional accuracy is guaranteed with gauge block interferometer (GBI).
- Useful in highly accurate calibration of CMMs.
- A mark "Coefficient of Thermal Expansion" is engraved on the surface. They are available in the nominal sizes (100 to 500 mm) of steel and ceramic rectangular gauge blocks.




*1: Suffix No. (- ■■■■) for Selecting Standard Required

| ISO / JIS | | | |
|------------|-------|------------------------|-------------------------|
| Suffix No. | Grade | Inspection Certificate | Calibration Certificate |
| -01B | K | ✓ | ✓ |

| ASME | | | |
|------------|-------|------------------------|-------------------------|
| Suffix No. | Grade | Inspection Certificate | Calibration Certificate |
| -51B | K | ✓ | ✓ |

| BS | | | |
|------------|-------|------------------------|-------------------------|
| Suffix No. | Grade | Inspection Certificate | Calibration Certificate |
| -11B | K | ✓ | ✓ |

Note: Only for 100 mm type

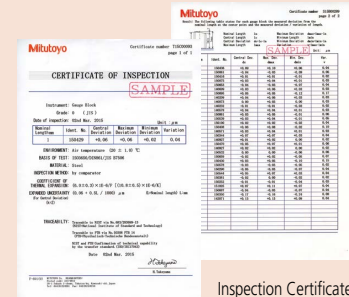

Inspection Certificate

SPECIFICATIONS

| Metric Blocks with CTE | | | Inch Blocks with CTE | | |
|------------------------|-------------------|-------------|----------------------|-------------------|-------------|
| Code No. (steel)*1 | Code No. (CERA)*1 | Length (mm) | Code No. (steel)*1 | Code No. (CERA)*1 | Length (in) |
| 611681 | 613681 | 100 | 611204 | 613204 | 4 |
| 611802 | 613802 | 125 | 611205 | 613205 | 5 |
| 611803 | 613803 | 150 | 611206 | 613206 | 6 |
| 611804 | 613804 | 175 | 611207 | 613207 | 7 |
| 611682 | 613682 | 200 | 611208 | 613208 | 8 |
| 611805 | 613805 | 250 | 611222 | 613222 | 10 |
| 611683 | 613683 | 300 | 611223 | 613223 | 12 |
| 611684 | 613684 | 400 | 611224 | 613224 | 16 |
| 611685 | 613685 | 500 | 611225 | 613225 | 20 |


| | |
|--|------------------------------------|
| Grade | K class in JIS/ISO, ASME |
| Uncertainty of thermal expansion coefficient | $0.035 \times 10^{-6}/K$ ($k=2$) |
| Uncertainty of length measurement | 30 nm ($k=2$), for 100 mm block |

Note: An inspection certificate and a JCSS calibration certificate are supplied as standard.

A calibration report and a calibration certificate for the thermal expansion coefficient are also supplied as standard.



Thermal expansion coefficient–Temperature characteristic

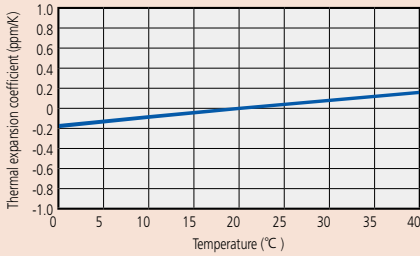

Comparison of maximum errors at 23 °C (500 mm size)

- Temperature compensation error of typical ISO/JIS-certified product: ±1.5 µm
- Temperature compensation error of Mitutoyo standard gauge blocks: ±0.75 µm
- Temperature compensation error of gauge blocks with thermal expansion coefficient: ±0.075 µm
- Maximum thermal expansion of ZERO CERA Blocks: +0.03 µm
- Thermal expansion of steel gauge blocks: +16.2 µm
- Thermal expansion of CERA Blocks: +13.95 µm

ZERO CERA Blocks (Ultra-low Thermal Expansion)

- ZERO CERA Blocks are gauge blocks made of special ceramic materials that have extremely low thermal expansion. They are lightweight, easy to handle, and slow in aging (thermal expansion coefficient: $0 \pm 0.02 \times 10^{-6} / K$ (20 °C), specific gravity 2.4 g/cm³). Many research institutions and academic institutions rely on ZERO CERA Blocks in various applications, including the study of methods of calibrating CMM.
- Each block is marked with “ZERO CERA BLOCK” logo.
- Available in the nominal sizes (30 to 1,000 mm) of rectangular gauge blocks.



SPECIFICATIONS

| Metric Blocks | | | Length (mm) |
|---------------|------------|------------|-------------|
| JIS/ISO | Code No. | | |
| | BS | ASME | |
| 617673-016 | 617673-116 | 617673-516 | 30 |
| 617675-016 | 617675-116 | 617675-516 | 50 |
| 617681-016 | 617681-116 | 617681-516 | 100 |
| 617682-016 | 617682-116 | 617682-516 | 200 |
| 617683-016 | 617683-116 | 617683-516 | 300 |
| 617684-016 | 617684-116 | 617684-516 | 400 |
| 617685-016 | 617685-116 | 617685-516 | 500 |
| 617840-016 | 617840-116 | 617840-516 | 600 |
| 617841-016 | 617841-116 | 617841-516 | 700 |
| 617843-016 | 617843-116 | 617843-516 | 800 |
| 617844-016 | 617844-116 | 617844-516 | 900 |
| 617845-016 | 617845-116 | 617845-516 | 1000 |
| 516-771-60 | 516-771-61 | 516-771-66 | Above set |



Tài liệu được tổng hợp bởi đội ngũ kỹ thuật của NPOWER
Bản quyền nội dung thuộc về Mitutoyo

Powered by NAVITECH | www.navitech.co
www.npower.com.vn

Gauge Blocks



Metric/Inch Rectangular Gauge Block Sets SERIES 516

- Mitutoyo provides a wide selection of boxed sets of gauge blocks to meet the various needs of industry. Please select the set most suited to your working conditions and applications.

Steel 1 mm Base Block Sets



Steel 112-block set

Steel 103-block set

Steel 76-block set

Steel 56-block set

Steel 47-block set

Steel 46-block set

Steel 34-block set

Steel 32-block set

Steel 0.001 mm Step Block Sets



Steel 9-block set
(1.001 to 1.009 mm)

Steel 9-block set
(0.991 to 0.999 mm)

Steel 18-block set

Steel Long Block Sets



Steel 8-block set

Steel Wear Block Sets



Steel (1 mm)

Steel Thin Block Sets



Steel 9-block set

Note: Details of the contents of any particular set are given on pages 01-11 to 01-12.



CERA 1 mm Base Block Sets



CERA 112-block set

CERA 103-block set

CERA 76-block set

CERA 56-block set

CERA 47-block set

CERA 46-block set

CERA 34-block set

CERA 32-block set

CERA 0.001 mm Step Block Sets



CERA 9-block set
(1.001 to 1.009 mm)


CERA 9-block set
(0.991 to 0.999 mm)

CERA 18-block set

CERA Long Block Sets



CERA 8-block set

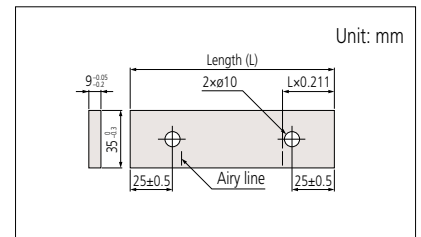

CERA Wear Block Sets



CERA (1 mm)

Note: Details of the contents of any particular set are given on pages 01-11 to 01-12.



Tài liệu được tổng hợp bởi đội ngũ kỹ thuật của **NPOWER**
Bản quyền nội dung thuộc về **Mitutoyo**

Powered by **NAVITECH** | www.navitech.co
www.npower.com.vn

Gauge Blocks

SPECIFICATIONS

1 mm Base Block Sets

| Blocks per set | Code No. | | Standard/grade available and Suffix No.*1 | | | Blocks included in set | | |
|----------------|----------|---------|---|--------|--------|------------------------|-----------|------|
| | Steel | CERA | ISO/JIS | ASME | BS | Size (mm) | Step (mm) | Qty. |
| 122 | — | — | — | — | — | 1.0005 | — | 1 |
| | 516-596 | — | K: -#0 | — | — | 1.001 - 1.009 | 0.001 | 9 |
| | 516-597 | — | O: -#0 | — | — | 1.01 - 1.49 | 0.01 | 49 |
| | 516-598 | — | 1: -#0 | — | — | 1.6 - 1.9 | 0.1 | 4 |
| | 516-599 | — | 2: -#0 | — | — | 0.5 - 24.5 | 0.5 | 49 |
| 112 | 516-531 | 516-541 | — | — | — | 1.0005 | — | 1 |
| | 516-937 | 516-337 | K: -#0 | K: -#6 | K: -#1 | 1.001 - 1.009 | 0.001 | 9 |
| | 516-938 | 516-338 | O: -#0 | O: -#6 | O: -#1 | 1.01 - 1.49 | 0.01 | 49 |
| | 516-939 | 516-339 | 1: -#0 | 1: -#6 | 1: -#1 | 0.5 - 24.5 | 0.5 | 49 |
| | 516-940 | 516-340 | 2: -#0 | 2: -#6 | 2: -#1 | 25 - 100 | 25 | 4 |
| 103 | 516-533 | 516-542 | — | — | — | 1.005 | — | 1 |
| | 516-941 | 516-341 | K: -#0 | O: -#6 | K: -#1 | 1.01 - 1.49 | 0.01 | 49 |
| | 516-942 | 516-342 | O: -#0 | O: -#6 | O: -#1 | 0.5 - 24.5 | 0.5 | 49 |
| | 516-943 | 516-343 | 1: -#0 | 1: -#6 | 1: -#1 | 25 - 100 | 25 | 4 |
| | 516-944 | 516-344 | 2: -#0 | 2: -#6 | 2: -#1 | — | — | — |
| 88 | — | — | — | — | — | 1.0005 | — | 1 |
| | 516-969 | 516-369 | — | — | K: -#1 | 1.001 - 1.009 | 0.001 | 9 |
| | 516-970 | 516-370 | O: -#0 | — | O: -#1 | 1.01 - 1.49 | 0.01 | 49 |
| | 516-971 | 516-371 | 1: -#0 | — | 1: -#1 | 0.5 - 9.5 | 0.5 | 19 |
| | 516-972 | 516-372 | 2: -#0 | — | 2: -#1 | 10 - 100 | 10 | 10 |
| 87 | 516-535 | 515-543 | — | — | — | 1.001 - 1.009 | 0.001 | 9 |
| | 516-945 | 516-345 | K: -#0 | K: -#6 | K: -#1 | 1.01 - 1.49 | 0.01 | 49 |
| | 516-946 | 516-346 | O: -#0 | O: -#6 | O: -#1 | 0.5 - 9.5 | 0.5 | 19 |
| | 516-947 | 516-347 | 1: -#0 | 1: -#6 | 1: -#1 | 10 - 100 | 10 | 10 |
| | 516-948 | 516-348 | 2: -#0 | 2: -#6 | 2: -#1 | — | — | — |
| 76 | — | — | — | — | — | 1.005 | — | 1 |
| | 516-949 | 516-349 | K: -#0 | — | — | 1.01 - 1.49 | 0.01 | 49 |
| | 516-950 | 516-350 | O: -#0 | — | — | 0.5 - 9.5 | 0.5 | 19 |
| | 516-951 | 516-351 | 1: -#0 | — | — | 10 - 40 | 10 | 4 |
| | 516-952 | 516-352 | 2: -#0 | — | — | 50 - 100 | 25 | 3 |
| 56 | 516-536 | 516-544 | — | — | — | 0.5 | — | 1 |
| | 516-953 | 516-353 | K: -#0 | K: -#6 | — | 1.001 - 1.009 | 0.001 | 9 |
| | 516-954 | 516-354 | O: -#0 | O: -#6 | — | 1.01 - 1.09 | 0.01 | 9 |
| | 516-955 | 516-355 | 1: -#0 | 1: -#6 | — | 1.1 - 1.9 | 0.1 | 9 |
| | 516-956 | 516-356 | 2: -#0 | 2: -#6 | — | 1 - 24 | 1 | 24 |
| 47 | 516-537 | 516-545 | — | — | — | 1.005 | — | 1 |
| | 516-957 | 516-357 | K: -#0 | K: -#6 | — | 1.01 - 1.09 | 0.01 | 9 |
| | 516-958 | 516-358 | O: -#0 | O: -#6 | — | 1.1 - 1.9 | 0.1 | 9 |
| | 516-959 | 516-359 | 1: -#0 | 1: -#6 | — | 1 - 24 | 1 | 24 |
| | 516-960 | 516-360 | 2: -#0 | 2: -#6 | — | 25 - 100 | 25 | 4 |
| 47 | — | — | — | — | — | 1.005 | — | 1 |
| | 516-961 | 516-361 | K: -#0 | — | K: -#1 | 1.01 - 1.19 | 0.01 | 19 |
| | 516-962 | 516-362 | O: -#0 | — | O: -#1 | 1.2 - 1.9 | 0.1 | 8 |
| | 516-963 | 516-363 | 1: -#0 | — | 1: -#1 | 1 - 9 | 1 | 9 |
| | 516-964 | 516-364 | 2: -#0 | — | 2: -#1 | 10 - 100 | 10 | 10 |
| 46 | — | — | — | — | — | 1.001 - 1.009 | 0.001 | 9 |
| | 516-994 | 516-394 | K: -#0 | — | — | 1.01 - 1.09 | 0.01 | 9 |
| | 516-995 | 516-395 | O: -#0 | — | — | 1.1 - 1.9 | 0.1 | 9 |
| | 516-996 | 516-396 | 1: -#0 | — | — | 1 - 9 | 1 | 9 |
| | 516-997 | 516-397 | 2: -#0 | — | — | 10 - 100 | 10 | 10 |
| 34 | — | — | — | — | — | 1.0005 | — | 1 |
| | 516-128 | 516-178 | K: -#0 | — | K: -#1 | 1.001 - 1.009 | 0.001 | 9 |
| | 516-129 | 516-179 | O: -#0 | — | O: -#1 | 1.01 - 1.09 | 0.01 | 9 |
| | 516-130 | 516-180 | 1: -#0 | — | 1: -#1 | 1.1 - 1.9 | 0.1 | 9 |
| | 516-131 | 516-181 | 2: -#0 | — | 2: -#1 | 1 - 5 | 1 | 5 |
| 32 | — | — | — | — | — | 1.005 | — | 1 |
| | 516-965 | 516-365 | K: -#0 | — | K: -#1 | 1.01 - 1.09 | 0.01 | 9 |
| | 516-966 | 516-366 | O: -#0 | — | O: -#1 | 1.1 - 1.9 | 0.1 | 9 |
| | 516-967 | 516-367 | 1: -#0 | — | 1: -#1 | 1 - 9 | 1 | 9 |
| | 516-968 | 516-368 | 2: -#0 | — | 2: -#1 | 10 - 30 | 10 | 3 |
| | | | | | | 60 | | 1 |

Thin Block Sets

| Blocks per set | Code No. | | Standard/grade available and Suffix No.*1 | | | Blocks included in set | | |
|----------------|----------|------|---|------|----|------------------------|-----------|------|
| | Steel | CERA | ISO/JIS | ASME | BS | Size (mm) | Step (mm) | Qty. |
| 9 | 516-990 | — | O: -#0 | — | — | 0.10 - 0.50 | 0.05 | 9 |
| | 516-991 | — | 1: -#0 | — | — | — | — | — |
| | 516-992 | — | 2: -#0 | — | — | — | — | — |

Note: Details of the overall sizes for forms of block are given on page 01-3 and the accuracy standards to which they are manufactured are given on page 01-5.



*1: Suffix No. (■) for Selecting Standard and Certificate Provided

| ISO / JIS | | |
|------------|------------------------|------------------------------|
| Suffix No. | Inspection Certificate | Calibration Certificate JCSS |
| 1 | ✓ | |
| 6 | ✓ | ✓ |

Suffix No. 1: Not available for Grade K sets.


| ASME | | |
|------------|------------------------|------------------------------|
| Suffix No. | Inspection Certificate | Calibration Certificate JCSS |
| 1 | ✓ | |
| 6 | ✓ | ✓ |

Suffix No. 1: Not available for Grade K sets.
Suffix No. 6: Only for Grade K sets.

| BS | | |
|------------|------------------------|------------------------------|
| Suffix No. | Inspection Certificate | Calibration Certificate JCSS |
| 1 | ✓ | |
| 6 | ✓ | ✓ |

Suffix No. 1: Not available for Grade K sets.
Suffix No. 6: Only for Grade K sets.

Inspection Certificate

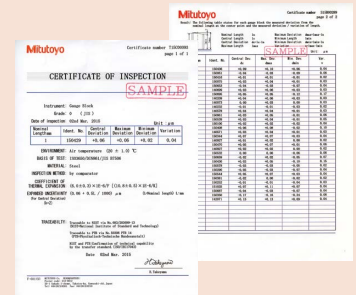



SPECIFICATIONS

0.001 mm Step Block Sets

| Blocks per set | Code No. | | Standard/grade available and Suffix No.*1 | | | Blocks included in set | | |
|----------------|----------|---------|---|------|--------|------------------------|-----------|------|
| | Steel | CERA | ISO/JIS | ASME | BS | Size (mm) | Step (mm) | Qty. |
| 18 | 516-973 | 516-373 | K: -#0 | — | — | 0.991 - 0.999 | 0.001 | 9 |
| | 516-974 | 516-374 | 0: -#0 | — | — | 1.001 - 1.009 | 0.001 | 9 |
| | 516-975 | 516-375 | 1: -#0 | — | — | — | — | — |
| | 516-976 | 516-376 | 2: -#0 | — | — | — | — | — |
| 9 | 516-981 | 516-381 | K: -#0 | — | K: -#1 | 1.001 - 1.009 | 0.001 | 9 |
| | 516-982 | 516-382 | 0: -#0 | — | 0: -#1 | — | — | — |
| | 516-983 | 516-383 | 1: -#0 | — | 1: -#1 | — | — | — |
| | 516-984 | 516-384 | 2: -#0 | — | 2: -#1 | — | — | — |
| 9 | 516-985 | 516-385 | K: -#0 | — | — | 0.991 - 0.999 | 0.001 | 9 |
| | 516-986 | 516-386 | 0: -#0 | — | — | — | — | — |
| | 516-987 | 516-387 | 1: -#0 | — | — | — | — | — |
| | 516-988 | 516-388 | 2: -#0 | — | — | — | — | — |

Long Block Sets

| Blocks per set | Code No. | | Standard/grade available and Suffix No.*1 | | | Blocks included in set | | |
|----------------|----------|---------|---|---------|----|------------------------|-----------|------|
| | Steel | CERA | ISO/JIS | ASME | BS | Size (mm) | Step (mm) | Qty. |
| 8 | 516-540 | 516-546 | — | K: -#6 | — | 125 - 175 | 25 | 3 |
| | 516-701 | 516-731 | K: -#0 | 00: -#6 | — | 200 - 250 | 50 | 2 |
| | 516-702 | 516-732 | 0: -#0 | 0: -#6 | — | 300 - 500 | 100 | 3 |
| | 516-703 | 516-733 | 1: -#0 | 1: -#6 | — | — | — | — |
| | 516-704 | 516-734 | 2: -#0 | 2: -#6 | — | — | — | — |
| | — | — | — | — | — | — | — | — |

Wear Block Sets

| Blocks per set | Code No. | | Standard/grade available and Suffix No.*1 | | | Blocks included in set | | |
|----------------|----------|---------|---|--------|----|------------------------|-----------|------|
| | Carbide | CERA | ISO/JIS | ASME | BS | Size (mm) | Step (mm) | Qty. |
| 2 | 516-807 | 516-832 | 0: -#0 | 0: -#6 | — | 1 | — | 2 |
| | 516-806 | 516-833 | 1: -#0 | 1: -#6 | — | — | — | — |
| 2 | 516-803 | 516-830 | 0: -#0 | 0: -#6 | — | 2 | — | 2 |
| | 516-802 | 516-831 | 1: -#0 | 1: -#6 | — | — | — | — |

Inch Block Sets

| Blocks per set | Code No. | | Standard/grade available and Suffix No.*1 | | | Blocks included in set | | |
|----------------|----------|---------|---|---------|--------|------------------------|-----------|------|
| | Steel | CERA | ISO/JIS | ASME | BS | Size (in) | Step (in) | Qty. |
| 82 | 516-548 | 516-556 | — | K: -#6 | — | 0.10005 | — | 1 |
| | 516-905 | 516-305 | — | 00: -#6 | — | 0.1001 - 0.1009 | 0.0001 | 9 |
| | 516-906 | 516-306 | — | 0: -#6 | 0: -#1 | 0.101 - 0.149 | 0.001 | 49 |
| | 516-907 | 516-307 | — | 1: -#6 | 1: -#1 | 0.05 - 0.95 | 0.05 | 19 |
| | 516-908 | 516-308 | — | 2: -#6 | 2: -#1 | 1 - 4 | 1 | 4 |
| 81 | 516-549 | 516-557 | — | K: -#6 | — | 0.1001 - 0.1009 | 0.0001 | 9 |
| | 516-901 | 516-301 | — | 00: -#6 | — | 0.101 - 0.149 | 0.001 | 49 |
| | 516-902 | 516-302 | — | 0: -#6 | 0: -#1 | 0.05 - 0.95 | 0.05 | 19 |
| | 516-903 | 516-303 | — | 1: -#6 | 1: -#1 | 1 - 4 | 1 | 4 |
| | 516-904 | 516-304 | — | 2: -#6 | 2: -#1 | — | — | — |
| 49 | — | — | — | — | — | 0.1001 - 0.1009 | 0.0001 | 9 |
| | 516-910 | — | — | — | 0: -#1 | 0.101 - 0.109 | 0.001 | 9 |
| | 516-911 | — | — | — | 1: -#1 | 0.01 - 0.19 | 0.01 | 19 |
| | 516-912 | — | — | — | 2: -#1 | 0.2 - 0.9 | 0.1 | 8 |
| 35 | 516-550 | 516-558 | — | K: -#6 | — | 0.10005 | — | 1 |
| | 516-913 | 516-313 | — | 00: -#6 | — | 0.1001 - 0.1009 | 0.0001 | 9 |
| | 516-914 | 516-314 | — | 0: -#6 | 0: -#1 | 0.101 - 0.109 | 0.001 | 9 |
| | 516-915 | 516-315 | — | 1: -#6 | 1: -#1 | 0.11 - 0.19 | 0.01 | 9 |
| | 516-916 | 516-316 | — | 2: -#6 | 2: -#1 | 0.1 - 0.3 | 0.1 | 3 |
| | — | — | — | — | — | 0.5, 1, 2, 4 | — | 4 |

Thin Block Sets

| Blocks per set | Code No. | | Standard/grade available and Suffix No.*1 | | | Blocks included in set | | |
|----------------|----------|------|---|---------|--------|------------------------|-----------|------|
| | Steel | CERA | ISO/JIS | ASME | BS | Size (in) | Step (in) | Qty. |
| 28 | 516-551 | — | — | K: -#6 | — | 0.02005 | — | 1 |
| | 516-917 | — | — | 00: -#6 | — | 0.0201 - 0.0209 | 0.0001 | 9 |
| | 516-918 | — | — | 0: -#6 | — | 0.021 - 0.029 | 0.001 | 9 |
| | 516-919 | — | — | 1: -#6 | — | 0.01 - 0.09 | 0.01 | 9 |
| | 516-920 | — | — | 2: -#6 | — | — | — | — |
| 10 | 516-926 | — | — | 0: -#6 | 0: -#1 | 0.005 - 0.050 | 0.005 | 10 |
| | 516-927 | — | — | 1: -#6 | 1: -#1 | — | — | — |
| | 516-928 | — | — | — | 2: -#1 | — | — | — |

Long Block Sets

| Blocks per set | Code No. | | Standard/grade available and Suffix No.*1 | | | Blocks included in set | | |
|----------------|----------|---------|---|---------|----|------------------------|-----------|------|
| | Steel | CERA | ISO/JIS | ASME | BS | Size (in) | Step (in) | Qty. |
| 8 | — | 516-564 | — | K: -#6 | — | 5 - 7 | 1 | 3 |
| | — | 516-741 | — | 00: -#6 | — | 8, 10, 12 | 2 | 3 |
| | 516-712 | 516-742 | — | 0: -#6 | — | 16, 20 | 4 | 2 |
| | 516-713 | 516-743 | — | 1: -#6 | — | — | — | — |

Wear Block Sets

| Blocks per set | Code No. | | Standard/grade available and Suffix No.*1 | | | Blocks included in set | | |
|----------------|----------|---------|---|--------|----|------------------------|-----------|------|
| | Carbide | CERA | ISO/JIS | ASME | BS | Size (in) | Step (in) | Qty. |
| 2 | 516-809 | 516-836 | — | 0: -#6 | — | 0.05 | — | 2 |
| | 516-808 | 516-837 | — | 1: -#6 | — | — | — | — |
| 2 | 516-805 | 516-834 | — | 0: -#6 | — | 0.1 | — | 2 |
| | 516-804 | 516-835 | — | 1: -#6 | — | — | — | — |



Tài liệu được tổng hợp bởi đội ngũ kỹ thuật của NPOWER
Bản quyền nội dung thuộc về Mitutoyo

Powered by NAVITECH | www.navitech.co
www.npower.com.vn

Note: Details of the overall sizes for forms of block are given on page 01-3 and the accuracy standards to which they are manufactured are given on page 01-5.

Gauge Blocks

Micrometer Inspection Gauge Block Sets SERIES 516

- Special sets for micrometer inspection. **516-106/107/108** and **516-156/157/158** are useful for checking maximum permissible error. For inspection of large micrometers, we recommend using **516-115/116/117** and **516-165/166/167** together. **516-580/581/582** and **516-390/391/392** are special sets for inspection of QuantuMike, whose spindle moves 2.0 mm per one thimble rotation.

Steel




Steel 10-block set



Steel 10-block set



Steel 8-block set

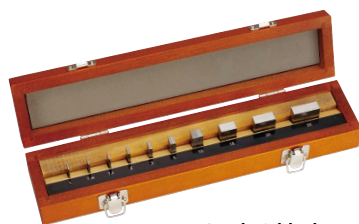

Steel 10-block set

CERA



CERA 10-block set



CERA 10-block set



CERA 8-block set



CERA 10-block set



Gauge Block Sets for Micrometer Inspection

A set consisting of a Micro Checker and gauge blocks for micrometer inspection.

(516-132/133/134/135/136/137)



516-607

Micro Checker

Can clamp a stack of gauge blocks to be used for micrometer inspection.

SPECIFICATIONS

| Metric | | Micro Checker (holder only) |
|-----------------------------------|---|-----------------------------|
| Code No. | 516-607 | |
| Applicable gauge block sets | 516-106/107/108, 516-156/157/158 | |
| Applicable gauge block sizes (mm) | 2.5, 5.1, 7.7, 10.3, 12.9, 15, 17.6, 20.2, 22.8, 25 | |

| Inch | | Micro Checker (holder only) |
|-----------------------------------|--|-----------------------------|
| Code No. | 516-608 | |
| Applicable gauge block sets | 516-921/922/923, 516-321/322/323 | |
| Applicable gauge block sizes (in) | 0.105, 0.210, 0.315, 0.420, 0.5, 0.605, 0.710, 0.815, 0.920, 1 | |

Typical application



(The gauge block and optical parallel shown are optional accessories.)



***1: Suffix No. (■) for Selecting Standard and Certificate Provided**

| ISO / JIS | | |
|------------|------------------------|-------------------------|
| Suffix No. | Inspection Certificate | Calibration Certificate |
| 1 | ✓ | JCSS |
| 6 | ✓ | ✓ |


Suffix No. 1: Not available for Grade K sets.

| ASME | | |
|------------|------------------------|-------------------------|
| Suffix No. | Inspection Certificate | Calibration Certificate |
| 1 | ✓ | JCSS |
| 6 | ✓ | ✓ |

Suffix No. 1: Not available for Grade K sets.
Suffix No. 6: Only for Grade K sets.

| BS | | |
|------------|------------------------|-------------------------|
| Suffix No. | Inspection Certificate | Calibration Certificate |
| 1 | ✓ | JCSS |

Inspection Certificate



SPECIFICATIONS

| Metric Block Sets | | | | | | |
|-------------------|----------|---------|---|---------|----|---|
| Blocks per set | Code No. | | Standard/grade available and Suffix No.*1 | | | Blocks included in set |
| | Steel | CERA | ISO/JIS | ASME | BS | |
| 16 | 516-111 | 516-161 | 0: -■0 | — | — | 1.00, 1.25, 1.5, 2, 3, 5, 10, 15, 20, 25, 25.25, 30, 35, 40, 45, 50 mm, Cerastone, Optical parallels (t=12 mm, 25 mm) |
| | 516-112 | 516-162 | 1: -■0 | — | — | |
| | 516-113 | 516-163 | 2: -■0 | — | — | |
| 10 | 516-977 | — | K: -■0 | — | — | 1.00, 1.25, 1.50, 2, 3, 5, 10, 15, 20, 25 mm, Optical parallel (t=12 mm) |
| | 516-978 | 516-378 | 0: -■0 | — | — | |
| | 516-979 | 516-379 | 1: -■0 | — | — | |
| | 516-980 | 516-380 | 2: -■0 | — | — | |
| 10 | 516-103 | 516-152 | 0: -■0 | 0: -■6 | — | 1.00, 1.25, 1.50, 2, 3, 5, 10, 15, 20, 25 mm |
| | 516-101 | 516-153 | 1: -■0 | 1: -■6 | — | |
| | — | 516-154 | 2: -■0 | — | — | |
| 10 | 516-580 | 516-390 | 0: -■0 | — | — | 2.2, 4.8, 7.8, 10.4, 12, 15.2, 17.4, 19.6, 22.6, 25 mm |
| | 516-581 | 516-391 | 1: -■0 | — | — | |
| | 516-582 | 516-392 | 2: -■0 | — | — | |
| 10 | 516-106 | 516-156 | 0: -■0 | — | — | 2.5, 5.1, 7.7, 10.3, 12.9, 15, 17.6, 20.2, 22.8, 25 mm, Optical parallel (t=12 mm) |
| | 516-107 | 516-157 | 1: -■0 | — | — | |
| | 516-108 | 516-158 | 2: -■0 | — | — | |
| 10 | 516-132 | 516-182 | 0: -■0 | — | — | 1.25, 1.50, 1, 2, 3, 5, 10, 15, 20, 25 mm, Micro Checker, Optical parallel (t=12 mm) |
| | 516-133 | 516-183 | 1: -■0 | — | — | |
| | 516-134 | 516-184 | 2: -■0 | — | — | |
| 10 | 516-135 | 516-185 | 0: -■0 | — | — | 2.5, 5.1, 7.7, 10.3, 12.9, 15, 17.6, 20.2, 22.8, 25 mm, Micro Checker, Optical parallel (t=12 mm) |
| | 516-136 | 516-186 | 1: -■0 | — | — | |
| | 516-137 | 516-187 | 2: -■0 | — | — | |
| 8 | — | 516-547 | — | K: -■6 | — | 25, 50, 75, 100, 125, 150, 175, 200 mm |
| | — | 516-164 | K: -■0 | 00: -■6 | — | |
| | 516-115 | 516-165 | 0: -■0 | 0: -■6 | — | |
| | 516-116 | 516-166 | 1: -■0 | 1: -■6 | — | |
| | 516-117 | 516-167 | 2: -■0 | 2: -■6 | — | |
| | — | — | — | — | — | |

| Inch Block Sets | | | | | | |
|-----------------|----------|---------|---|---------|--------|---|
| Blocks per set | Code No. | | Standard/grade available and Suffix No.*1 | | | Blocks included in set |
| | Steel | CERA | ISO/JIS | ASME | BS | |
| 10 | 516-528 | 516-318 | — | 00: -■6 | 0: -■1 | 0.087, 0.189, 0.307, 0.409, 0.472, 0.598, 0.669, 0.772, 0.890, 1 in |
| | 516-529 | 516-319 | — | 0: -■6 | 1: -■1 | |
| | 516-530 | 516-320 | — | 1: -■6 | 2: -■1 | |
| 10 | 516-552 | 516-559 | — | K: -■6 | — | 0.105, 0.210, 0.315, 0.420, 0.500, 0.605, 0.710, 0.815, 0.920, 1 in, Optical parallel (t=0.5 in) |
| | 516-921 | 516-321 | — | 00: -■6 | 0: -■1 | |
| | 516-922 | 516-322 | — | 0: -■6 | 1: -■1 | |
| | 516-923 | 516-323 | — | 1: -■6 | 2: -■1 | |
| 10 | 516-553 | 516-560 | — | K: -■6 | — | 0.105, 0.210, 0.315, 0.420, 0.500, 0.605, 0.710, 0.815, 0.920, 1 in, Micro checker, Optical parallel (t=0.5 in) |
| | 516-138 | 516-188 | — | 00: -■6 | 0: -■1 | |
| | 516-139 | 516-189 | — | 0: -■6 | 1: -■1 | |
| | 516-140 | 516-190 | — | 1: -■6 | 2: -■1 | |
| 9 | 516-554 | 516-561 | — | K: -■6 | — | 0.0625, 0.100, 0.125, 0.200, 0.250, 0.300, 0.500, 1, 2 in, Optical parallel (t=0.5 in) |
| | 516-929 | 516-333 | — | 00: -■6 | — | |
| | 516-930 | 516-334 | — | 0: -■6 | — | |
| | 516-931 | 516-335 | — | 1: -■6 | — | |
| | 516-932 | 516-336 | — | 2: -■6 | — | |
| 9 | 516-555 | 516-562 | — | K: -■6 | — | 0.0625, 0.100, 0.125, 0.200, 0.250, 0.300, 0.500, 1, 2 in, Micro Checker, Optical parallel (t=0.5 in) |
| | 516-141 | 516-191 | — | 00: -■6 | — | |
| | 516-142 | 516-192 | — | 0: -■6 | — | |
| | 516-143 | 516-193 | — | 1: -■6 | — | |
| | 516-144 | 516-194 | — | 2: -■6 | — | |
| 9 | — | 516-563 | — | K: -■6 | — | 0.0625, 0.100, 0.125, 0.200, 0.250, 0.300, 0.500, 1, 2 in |
| | — | 516-329 | — | 00: -■6 | — | |
| | 516-934 | 516-330 | — | 0: -■6 | — | |
| | 516-935 | 516-331 | — | 1: -■6 | — | |
| | 516-936 | 516-332 | — | 2: -■6 | — | |
| 8 | 516-126 | 516-176 | — | 0: -■6 | — | 1, 2, 3, 4, 5, 6, 7, 8 in |
| | 516-127 | 516-177 | — | 1: -■6 | — | |

SERIES 516 – Caliper Inspection Gauge Block Sets

SPECIFICATIONS

| Metric Block Sets | | | | | | |
|-------------------|----------|---------|---|------|----|--|
| Blocks per set | Code No. | | Standard/grade available and Suffix No. | | | Blocks included in set |
| | Steel | CERA | ISO/JIS | ASME | BS | |
| 5 | — | 516-174 | 2: -10 | — | — | 5 pcs.: 10.3, 24.5, 50, 75, 100 mm, Ceramic plain jaws, Holder (250 mm), Glove |
| 4 | 516-526 | 516-566 | 1: -10 | — | — | 4 pcs.: 10, 30, 50, 125 mm, Setting ring (ø4 mm, ø10 mm), Pin gage (ø10 mm), Glove |
| | 516-527 | 516-567 | 2: -10 | — | — | |
| 3 | 516-124 | 516-150 | 1: -10 | — | — | 3 pcs.: 30, 41.3, 131.4 mm, Setting ring (ø4 mm, ø25 mm), Glove |
| | 516-125 | 516-151 | 2: -10 | — | — | |
| 2 | 516-122 | 516-172 | 1: -10 | — | — | 2 pcs.: 41.3, 131.4 mm, Setting ring (ø20 mm), Glove |
| | 516-123 | 516-173 | 2: -10 | — | — | |



Tài liệu được tổng hợp bởi đội ngũ kỹ thuật của NPOWER
Bản quyền nội dung thuộc về Mitutoyo

Powered by NAVITECH | www.navitech.co
www.npower.com.vn



Gauge Blocks

Individual Metric Rectangular Gauge Blocks

- One or more gauge blocks can be purchased separately. If using only one length repeatedly, it is good practice to purchase discrete gauge blocks.
- Nominal sizes not shown in the list can also be manufactured.
- Each gauge block is supplied with an inspection certificate. When placing an order, please give us the code number with the suffix number corresponding to the applicable standard (see the suffix list).



SPECIFICATIONS

Metric Blocks

| Length (mm) | Code No.*1 | | Length (mm) | Code No.*1 | | Length (mm) | Code No.*1 | |
|-------------|------------|--------|-------------|------------|------|-------------|------------|--------|
| | Steel | CERA | | Steel | CERA | | Steel | CERA |
| 0.1 | 611821 | — | 0.53 | 611894 | — | 0.96 | 611937 | — |
| 0.11 | 611860 | — | 0.54 | 611895 | — | 0.97 | 611938 | — |
| 0.12 | 611861 | — | 0.55 | 611896 | — | 0.98 | 611939 | — |
| 0.13 | 611862 | — | 0.56 | 611897 | — | 0.99 | 611940 | — |
| 0.14 | 611863 | — | 0.57 | 611898 | — | 0.991 | 611551 | 613551 |
| 0.15 | 611822 | — | 0.58 | 611899 | — | 0.992 | 611552 | 613552 |
| 0.16 | 611864 | — | 0.59 | 611900 | — | 0.993 | 611553 | 613553 |
| 0.17 | 611865 | — | 0.6 | 611901 | — | 0.994 | 611554 | 613554 |
| 0.18 | 611866 | — | 0.61 | 611902 | — | 0.995 | 611555 | 613555 |
| 0.19 | 611867 | — | 0.62 | 611903 | — | 0.996 | 611556 | 613556 |
| 0.2 | 611823 | — | 0.63 | 611904 | — | 0.997 | 611557 | 613557 |
| 0.21 | 611868 | — | 0.64 | 611905 | — | 0.998 | 611558 | 613558 |
| 0.22 | 611869 | — | 0.65 | 611906 | — | 0.999 | 611559 | 613559 |
| 0.23 | 611870 | — | 0.66 | 611907 | — | 1 | 611611 | 613611 |
| 0.24 | 611871 | — | 0.67 | 611908 | — | 1.0005 | 611520 | 613520 |
| 0.25 | 611824 | — | 0.68 | 611909 | — | 1.001 | 611521 | 613521 |
| 0.26 | 611872 | — | 0.69 | 611910 | — | 1.002 | 611522 | 613522 |
| 0.27 | 611873 | — | 0.7 | 611911 | — | 1.003 | 611523 | 613523 |
| 0.28 | 611874 | — | 0.71 | 611912 | — | 1.004 | 611524 | 613524 |
| 0.29 | 611875 | — | 0.72 | 611913 | — | 1.005 | 611525 | 613525 |
| 0.3 | 611825 | — | 0.73 | 611914 | — | 1.006 | 611526 | 613526 |
| 0.31 | 611876 | — | 0.74 | 611915 | — | 1.007 | 611527 | 613527 |
| 0.32 | 611877 | — | 0.75 | 611916 | — | 1.008 | 611528 | 613528 |
| 0.33 | 611878 | — | 0.76 | 611917 | — | 1.009 | 611529 | 613529 |
| 0.34 | 611879 | — | 0.77 | 611918 | — | 1.01 | 611561 | 613561 |
| 0.35 | 611826 | — | 0.78 | 611919 | — | 1.02 | 611562 | 613562 |
| 0.36 | 611880 | — | 0.79 | 611920 | — | 1.03 | 611563 | 613563 |
| 0.37 | 611881 | — | 0.8 | 611921 | — | 1.04 | 611564 | 613564 |
| 0.38 | 611882 | — | 0.81 | 611922 | — | 1.05 | 611565 | 613565 |
| 0.39 | 611883 | — | 0.82 | 611923 | — | 1.06 | 611566 | 613566 |
| 0.4 | 611827 | — | 0.83 | 611924 | — | 1.07 | 611567 | 613567 |
| 0.41 | 611884 | — | 0.84 | 611925 | — | 1.08 | 611568 | 613568 |
| 0.42 | 611885 | — | 0.85 | 611926 | — | 1.09 | 611569 | 613569 |
| 0.43 | 611886 | — | 0.86 | 611927 | — | 1.1 | 611570 | 613570 |
| 0.44 | 611887 | — | 0.87 | 611928 | — | 1.11 | 611571 | 613571 |
| 0.45 | 611828 | — | 0.88 | 611929 | — | 1.12 | 611572 | 613572 |
| 0.46 | 611888 | — | 0.89 | 611930 | — | 1.13 | 611573 | 613573 |
| 0.47 | 611889 | — | 0.9 | 611931 | — | 1.14 | 611574 | 613574 |
| 0.48 | 611890 | — | 0.91 | 611932 | — | 1.15 | 611575 | 613575 |
| 0.49 | 611891 | — | 0.92 | 611933 | — | 1.16 | 611576 | 613576 |
| 0.5 | 611506 | 613506 | 0.93 | 611934 | — | 1.17 | 611577 | 613577 |
| 0.51 | 611892 | — | 0.94 | 611935 | — | 1.18 | 611578 | 613578 |
| 0.52 | 611893 | — | 0.95 | 611936 | — | 1.19 | 611579 | 613579 |

Note: Details of the overall sizes for forms of block are given on page 01-3 and the accuracy standards to which they are manufactured are given on page 01-5.




*1: Suffix No. (-■■■■) for Selecting Standard and Certificate Provided

| ISO / JIS | Suffix No. | Grade | Inspection Certificate | Calibration Certificate | |
|-----------|------------|-------|------------------------|-------------------------|-----|
| | | | | JCSS | RvA |
| | -016 | K | ✓ | ✓ | |
| | -021 | 0 | ✓ | | |
| | -026 | 0 | ✓ | ✓ | |
| | -031 | 1 | ✓ | | |
| | -036 | 1 | ✓ | ✓ | |
| | -041 | 2 | ✓ | | |
| | -046 | 2 | ✓ | ✓ | |

| ASME | Suffix No. | Grade | Inspection Certificate | Calibration Certificate |
|------|------------|-------|------------------------|-------------------------|
| | | | | JCSS |
| | -516 | K | ✓ | ✓ |
| | -521 | 00 | ✓ | |
| | -531 | 0 | ✓ | |
| | -541 | 1 | ✓ | |
| | -551 | 2 | ✓ | |

| BS | Suffix No. | Grade | Inspection Certificate | Calibration Certificate |
|----|------------|-------|------------------------|-------------------------|
| | | | | JCSS |
| | -116 | K | ✓ | ✓ |
| | -121 | 0 | ✓ | |
| | -126 | 0 | ✓ | ✓ |
| | -131 | 1 | ✓ | |
| | -136 | 1 | ✓ | ✓ |
| | -141 | 2 | ✓ | |
| | -146 | 2 | ✓ | ✓ |




Inspection Certificate




Dimensions

Unit: mm


Nominal length:
0.1 mm to 5.5 mm
(0.004 in to 0.25 in)




Nominal length:
6 mm to 10 mm
(0.3 in to 0.4 in)



Nominal length:
10.3 mm to 100 mm
(0.45 in to 4 in)



Nominal length 125 mm to 1000 mm (5 in to 20 in)

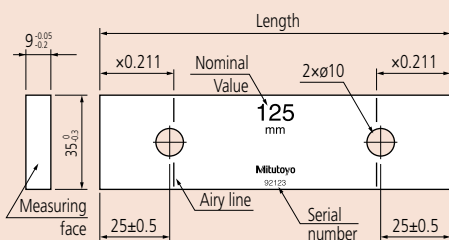

Tài liệu được tổng hợp bởi đội ngũ kỹ thuật của **NPOWER**
Bản quyền nội dung thuộc về **Mitutoyo**

Powered by **NAVITECH** | www.navitech.co
www.npower.com.vn

| Length (mm) | Code No.*1 | |
|-------------|------------|--------|
| | Steel | CERA |
| 1.2 | 611580 | 613580 |
| 1.21 | 611581 | 613581 |
| 1.22 | 611582 | 613582 |
| 1.23 | 611583 | 613583 |
| 1.24 | 611584 | 613584 |
| 1.25 | 611585 | 613585 |
| 1.26 | 611586 | 613586 |
| 1.27 | 611587 | 613587 |
| 1.28 | 611588 | 613588 |
| 1.29 | 611589 | 613589 |
| 1.3 | 611590 | 613590 |
| 1.31 | 611591 | 613591 |
| 1.32 | 611592 | 613592 |
| 1.33 | 611593 | 613593 |
| 1.34 | 611594 | 613594 |
| 1.35 | 611595 | 613595 |
| 1.36 | 611596 | 613596 |
| 1.37 | 611597 | 613597 |
| 1.38 | 611598 | 613598 |
| 1.39 | 611599 | 613599 |
| 1.4 | 611600 | 613600 |
| 1.41 | 611601 | 613601 |
| 1.42 | 611602 | 613602 |
| 1.43 | 611603 | 613603 |
| 1.44 | 611604 | 613604 |
| 1.45 | 611605 | 613605 |
| 1.46 | 611606 | 613606 |
| 1.47 | 611607 | 613607 |
| 1.48 | 611608 | 613608 |
| 1.49 | 611609 | 613609 |
| 1.5 | 611641 | 613641 |
| 1.6 | 611516 | 613516 |
| 1.7 | 611517 | 613517 |
| 1.8 | 611518 | 613518 |
| 1.9 | 611519 | 613519 |
| 2 | 611612 | 613612 |
| 2.0005 | 611690 | — |
| 2.001 | 611691 | — |
| 2.002 | 611692 | — |
| 2.003 | 611693 | — |
| 2.004 | 611694 | — |
| 2.005 | 611695 | — |
| 2.006 | 611696 | — |
| 2.007 | 611697 | — |
| 2.008 | 611698 | — |
| 2.009 | 611699 | — |
| 2.01 | 611701 | — |
| 2.02 | 611702 | — |
| 2.03 | 611703 | — |
| 2.04 | 611704 | — |
| 2.05 | 611705 | — |
| 2.06 | 611706 | — |
| 2.07 | 611707 | — |
| 2.08 | 611708 | — |
| 2.09 | 611709 | — |
| 2.1 | 611710 | — |
| 2.11 | 611711 | — |
| 2.12 | 611712 | — |
| 2.13 | 611713 | — |
| 2.14 | 611714 | — |
| 2.15 | 611715 | — |
| 2.16 | 611716 | — |

| Length (mm) | Code No.*1 | |
|-------------|------------|--------|
| | Steel | CERA |
| 2.17 | 611717 | — |
| 2.18 | 611718 | — |
| 2.19 | 611719 | — |
| 2.2 | 611720 | — |
| 2.21 | 611721 | — |
| 2.22 | 611722 | — |
| 2.23 | 611723 | — |
| 2.24 | 611724 | — |
| 2.25 | 611725 | — |
| 2.26 | 611726 | — |
| 2.27 | 611727 | — |
| 2.28 | 611728 | — |
| 2.29 | 611729 | — |
| 2.3 | 611730 | — |
| 2.31 | 611731 | — |
| 2.32 | 611732 | — |
| 2.33 | 611733 | — |
| 2.34 | 611734 | — |
| 2.35 | 611735 | — |
| 2.36 | 611736 | — |
| 2.37 | 611737 | — |
| 2.38 | 611738 | — |
| 2.39 | 611739 | — |
| 2.4 | 611740 | — |
| 2.41 | 611741 | — |
| 2.42 | 611742 | — |
| 2.43 | 611743 | — |
| 2.44 | 611744 | — |
| 2.45 | 611745 | — |
| 2.46 | 611746 | — |
| 2.47 | 611747 | — |
| 2.48 | 611748 | — |
| 2.49 | 611749 | — |
| 2.5 | 611642 | 613642 |
| 2.6 | 611750 | — |
| 2.7 | 611751 | — |
| 2.8 | 611752 | — |
| 2.9 | 611753 | — |
| 3 | 611613 | 613613 |
| 3.5 | 611643 | 613643 |
| 4 | 611614 | 613614 |
| 4.5 | 611644 | 613644 |
| 5 | 611615 | 613615 |
| 5.1 | 611850 | 613850 |
| 5.5 | 611645 | 613645 |
| 6 | 611616 | 613616 |
| 6.5 | 611646 | 613646 |
| 7 | 611617 | 613617 |
| 7.5 | 611647 | 613647 |
| 7.7 | 611851 | 613851 |
| 8 | 611618 | 613618 |
| 8.5 | 611648 | 613648 |
| 9 | 611619 | 613619 |
| 9.5 | 611649 | 613649 |
| 10 | 611671 | 613671 |
| 10.3 | 611852 | 613852 |
| 10.5 | 611650 | 613650 |
| 11 | 611621 | 613621 |
| 11.5 | 611651 | 613651 |
| 12 | 611622 | 613622 |
| 12.5 | 611652 | 613652 |
| 12.9 | 611853 | 613853 |

| Length (mm) | Code No.*1 | |
|-------------|------------|--------|
| | Steel | CERA |
| 13 | 611623 | 613623 |
| 13.5 | 611653 | 613653 |
| 14 | 611624 | 613624 |
| 14.5 | 611654 | 613654 |
| 15 | 611625 | 613625 |
| 15.5 | 611655 | 613655 |
| 16 | 611626 | 613626 |
| 16.5 | 611656 | 613656 |
| 17 | 611627 | 613627 |
| 17.5 | 611657 | 613657 |
| 17.6 | 611854 | 613854 |
| 18 | 611628 | 613628 |
| 18.5 | 611658 | 613658 |
| 19 | 611629 | 613629 |
| 19.5 | 611659 | 613659 |
| 20 | 611672 | 613672 |
| 20.2 | 611855 | 613855 |
| 20.5 | 611660 | 613660 |
| 21 | 611631 | 613631 |
| 21.5 | 611661 | 613661 |
| 22 | 611632 | 613632 |
| 22.5 | 611662 | 613662 |
| 22.8 | 611856 | 613856 |
| 23 | 611633 | 613633 |
| 23.5 | 611663 | 613663 |
| 24 | 611634 | 613634 |
| 24.5 | 611664 | 613664 |
| 25 | 611635 | 613635 |
| 25.25 | 611754 | 613754 |
| 30 | 611673 | 613673 |
| 35 | 611755 | 613755 |
| 40 | 611674 | 613674 |
| 41.3 | 611857 | 613857 |
| 45 | 611756 | 613756 |
| 50 | 611675 | 613675 |
| 60 | 611676 | 613676 |
| 70 | 611677 | 613677 |
| 75 | 611801 | 613801 |
| 80 | 611678 | 613678 |
| 90 | 611679 | 613679 |
| 100 | 611681 | 613681 |
| 125 | 611802 | 613802 |
| 131.4 | 611858 | 613858 |
| 150 | 611803 | 613803 |
| 175 | 611804 | 613804 |
| 200 | 611682 | 613682 |
| 250 | 611805 | 613805 |
| 300 | 611683 | 613683 |
| 400 | 611684 | 613684 |
| 500 | 611685 | 613685 |
| 600 | 611840 | — |
| 700 | 611841 | — |
| 750 | 611842 | — |
| 800 | 611843 | — |
| 900 | 611844 | — |
| 1000 | 611845 | — |

| Metric Wear Blocks | |
|--------------------|--------------------------------|
| Length (mm) | Code No.*1 Tungsten carbide |
| 1 | 612611 |
| 2 | 612612 |

Note: Details of the overall sizes for forms of block are given on page 01-3 and the accuracy standards to which they are manufactured are given on page 01-5.

Gauge Blocks

Individual Inch Rectangular Gauge Blocks

SPECIFICATIONS

| Inch Blocks | | | Inch Blocks | | | Inch Blocks | | |
|-------------|------------|------|-----------------|------------|--------|-----------------|------------|--------|
| Length (in) | Code No.*1 | | Length (in) | Code No.*1 | | Length (in) | Code No.*1 | |
| | Steel | CERA | | Steel | CERA | | Steel | CERA |
| 0.004 | 611304 | — | 0.024 | 611324 | — | 0.0625 | 611303 | 613303 |
| 0.005 | 611305 | — | 0.025 | 611325 | — | 0.07 | 611107 | — |
| 0.006 | 611306 | — | 0.026 | 611326 | — | 0.078125 (5/64) | 611103 | 613100 |
| 0.007 | 611307 | — | 0.027 | 611327 | — | 0.08 | 611108 | — |
| 0.008 | 611308 | — | 0.028 | 611328 | — | 0.09 | 611109 | — |
| 0.009 | 611309 | — | 0.029 | 611329 | — | 0.09375 (3/32) | 611104 | 613101 |
| 0.01 | 611310 | — | 0.03 | 611330 | — | 0.1 | 611191 | 613191 |
| 0.011 | 611311 | — | 0.031 | 611331 | — | 0.100025 | 611111 | 613110 |
| 0.012 | 611312 | — | 0.03125 (1/32) | 611101 | 613103 | 0.10005 | 611135 | 613135 |
| 0.013 | 611313 | — | 0.032 | 611332 | — | 0.100075 | 611112 | 613111 |
| 0.014 | 611314 | — | 0.033 | 611333 | — | 0.1001 | 611121 | 613121 |
| 0.015 | 611315 | — | 0.034 | 611334 | — | 0.1002 | 611122 | 613122 |
| 0.016 | 611316 | — | 0.035 | 611335 | — | 0.1003 | 611123 | 613123 |
| 0.017 | 611317 | — | 0.036 | 611336 | — | 0.1004 | 611124 | 613124 |
| 0.018 | 611318 | — | 0.037 | 611337 | — | 0.1005 | 611125 | 613125 |
| 0.019 | 611319 | — | 0.038 | 611338 | — | 0.1006 | 611126 | 613126 |
| 0.02 | 611320 | — | 0.039 | 611339 | — | 0.1007 | 611127 | 613127 |
| 0.02005 | 611240 | — | 0.04 | 611340 | — | 0.1008 | 611128 | 613128 |
| 0.0201 | 611231 | — | 0.041 | 611341 | — | 0.1009 | 611129 | 613129 |
| 0.0202 | 611232 | — | 0.042 | 611342 | — | 0.101 | 611141 | 613141 |
| 0.0203 | 611233 | — | 0.043 | 611343 | — | 0.102 | 611142 | 613142 |
| 0.0204 | 611234 | — | 0.044 | 611344 | — | 0.103 | 611143 | 613143 |
| 0.0205 | 611235 | — | 0.045 | 611345 | — | 0.104 | 611144 | 613144 |
| 0.0206 | 611236 | — | 0.046 | 611346 | — | 0.105 | 611145 | 613145 |
| 0.0207 | 611237 | — | 0.046875 (3/64) | 611102 | 613104 | 0.106 | 611146 | 613146 |
| 0.0208 | 611238 | — | 0.047 | 611347 | — | 0.107 | 611147 | 613147 |
| 0.0209 | 611239 | — | 0.048 | 611348 | — | 0.108 | 611148 | 613148 |
| 0.021 | 611321 | — | 0.049 | 611349 | — | 0.109 | 611149 | 613149 |
| 0.022 | 611322 | — | 0.05 | 611105 | 613105 | 0.109375 (7/64) | 611110 | 613102 |
| 0.023 | 611323 | — | 0.06 | 611106 | — | | | |


Note: Details of the overall sizes for forms of block are given on page 01-3 and the accuracy standards to which they are manufactured are given on page 01-5.



*1: Suffix No. (- ■■■■) for Selecting Standard and Certificate Provided

| ASME | | | |
|------------|-------|------------------------|-------------------------|
| Suffix No. | Grade | Inspection Certificate | Calibration Certificate |
| | | | JCSS |
| -516 | K | ✓ | ✓ |
| -521 | 00 | ✓ | |
| -531 | 0 | ✓ | |
| -541 | 1 | ✓ | |
| -551 | 2 | ✓ | |

| BS | | | |
|------------|-------|------------------------|-------------------------|
| Suffix No. | Grade | Inspection Certificate | Calibration Certificate |
| | | | JCSS |
| -121 | 0 | ✓ | |
| -131 | 1 | ✓ | |
| -141 | 2 | ✓ | |




Inspection Certificate




Dimensions

Unit: mm


Nominal length:
0.1 mm to 5.5 mm
(0.004 in to 0.25 in)




Nominal length:
6 mm to 10 mm
(0.3 in to 0.4 in)



Nominal length:
10.3 mm to 100 mm
(0.45 in to 4 in)



Nominal length 125 mm to 1000 mm (5 in to 20 in)

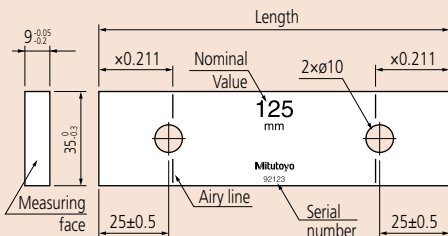

SPECIFICATIONS

Inch Blocks

| Length (in) | Code No. *1 | |
|-------------|-------------|--------|
| | Steel | CERA |
| 0.11 | 611150 | 613150 |
| 0.111 | 611151 | 613151 |
| 0.112 | 611152 | 613152 |
| 0.113 | 611153 | 613153 |
| 0.114 | 611154 | 613154 |
| 0.115 | 611155 | 613155 |
| 0.116 | 611156 | 613156 |
| 0.117 | 611157 | 613157 |
| 0.118 | 611158 | 613158 |
| 0.119 | 611159 | 613159 |
| 0.12 | 611160 | 613160 |
| 0.121 | 611161 | 613161 |
| 0.122 | 611162 | 613162 |
| 0.123 | 611163 | 613163 |
| 0.124 | 611164 | 613164 |
| 0.125 | 611165 | 613165 |
| 0.126 | 611166 | 613166 |
| 0.127 | 611167 | 613167 |
| 0.128 | 611168 | 613168 |
| 0.129 | 611169 | 613169 |
| 0.13 | 611170 | 613170 |
| 0.131 | 611171 | 613171 |
| 0.132 | 611172 | 613172 |
| 0.133 | 611173 | 613173 |
| 0.134 | 611174 | 613174 |
| 0.135 | 611175 | 613175 |
| 0.136 | 611176 | 613176 |
| 0.137 | 611177 | 613177 |
| 0.138 | 611178 | 613178 |

| Length (in) | Code No. *1 | |
|-------------|-------------|--------|
| | Steel | CERA |
| 0.139 | 611179 | 613179 |
| 0.14 | 611180 | 613180 |
| 0.141 | 611181 | 613181 |
| 0.142 | 611182 | 613182 |
| 0.143 | 611183 | 613183 |
| 0.144 | 611184 | 613184 |
| 0.145 | 611185 | 613185 |
| 0.146 | 611186 | 613186 |
| 0.147 | 611187 | 613187 |
| 0.148 | 611188 | 613188 |
| 0.149 | 611189 | 613189 |
| 0.15 | 611115 | 613115 |
| 0.16 | 611116 | 613116 |
| 0.17 | 611117 | 613117 |
| 0.18 | 611118 | 613118 |
| 0.19 | 611119 | 613119 |
| 0.2 | 611192 | 613192 |
| 0.21 | 611221 | 613221 |
| 0.25 | 611212 | 613212 |
| 0.3 | 611193 | 613193 |
| 0.315 | 611209 | 613209 |
| 0.35 | 611213 | 613213 |
| 0.375 (3/8) | 611113 | 613112 |
| 0.4 | 611194 | 613194 |
| 0.420 | 611210 | 613210 |
| 0.45 | 611214 | 613214 |
| 0.5 | 611195 | 613195 |
| 0.55 | 611215 | 613215 |
| 0.6 | 611196 | 613196 |

| Length (in) | Code No. *1 | |
|-------------|-------------|--------|
| | Steel | CERA |
| 0.605 | 611211 | 613211 |
| 0.65 | 611216 | 613216 |
| 0.7 | 611197 | 613197 |
| 0.710 | 611220 | 613220 |
| 0.75 | 611217 | 613217 |
| 0.8 | 611198 | 613198 |
| 0.815 | 611226 | 613226 |
| 0.85 | 611218 | 613218 |
| 0.9 | 611199 | 613199 |
| 0.920 | 611227 | 613227 |
| 0.95 | 611219 | 613219 |
| 1 | 611201 | 613201 |
| 2 | 611202 | 613202 |
| 3 | 611203 | 613203 |
| 4 | 611204 | 613204 |
| 5 | 611205 | 613205 |
| 6 | 611206 | 613206 |
| 7 | 611207 | 613207 |
| 8 | 611208 | 613208 |
| 10 | 611222 | 613222 |
| 12 | 611223 | 613223 |
| 16 | 611224 | 613224 |
| 20 | 611225 | 613225 |

Inch Wear Blocks

| Length (in) | Code No. *1 |
|-------------|------------------|
| | Tungsten carbide |
| 0.05 | 612105 |
| 0.1 | 612191 |

Note: Details of the overall sizes for forms of block are given on page 01-3 and the accuracy standards to which they are manufactured are given on page 01-5.
4 inch or more is not listed in the standard of British Standards Institution.



Tài liệu được tổng hợp bởi đội ngũ kỹ thuật của **NPOWER**
Bản quyền nội dung thuộc về **Mitutoyo**

Powered by **NAVITECH** | www.navitech.co
www.npower.com.vn

Gauge Blocks

Rectangular Gauge Block Accessories SERIES 516

- Accessory sets for extending the range of application for rectangular gauge blocks.
- Available in 22-piece and 14-piece sets. Each accessory is also available separately for applications where a full set is not needed.
- Can be used with both steel and CERA blocks.



516-601
(22 pcs.)

SPECIFICATIONS

| Item Description | Code No. | Nominal capacity/ dimension (mm) | Set | | Quantity Supplied |
|-------------------------|----------------|--|---------------------------|---------------------------|----------------------|
| | | | 22 pcs. 516-601 | 14 pcs. 516-602 | |
| Holder | 619002 | 15 to 60 | | ✓ | 1 pc. |
| | 619003 | 5 to 100 | ✓ | ✓ | |
| | 619004 | 15 to 160 | ✓ | ✓ | |
| | 619005 | 20 to 250 | ✓ | ✓ | |
| Base | 619009 | 35 | ✓ | ✓ | |
| Half-round jaw | 619010* | 2 | ✓ | ✓ | One pair (2 pcs.) |
| | 619011* | 5 | ✓ | ✓ | |
| | 619012* | 8 | ✓ | ✓ | |
| | 619013* | 12 | ✓ | | |
| | 619014* | 20 | ✓ | | |
| Plain jaw | 619018* | 160 | ✓ | | |
| Scriber point | 619019 | — | ✓ | ✓ | 1 pc. |
| Center point | 619020 | — | ✓ | ✓ | |
| Tram point | 619021* | — | ✓ | | One pair (2 pcs.) |
| Triangular straightedge | 619022 | 100 | ✓ | ✓ | 1 pc. |
| | 619023 | 160 | ✓ | | |

* A single piece is supplied for each code number, except for half-round jaws, plain jaws (B type) and tram points, which are supplied as a two-pack.

Typical application



Half-round jaw (619013) 2 pcs.
Holder (619002) 1 pc.
Gauge block




Base (619009) 1 pc.
Holder (619003) 1 pc.
Scribe point (619019) 1 pc.
Gauge block




Setting a bore gage using a holder with a pair of Type I half-round jaws arranged as flat contact surfaces

Holder

Thickness=15 mm
Width=29.5 mm




619002 $l=15$ to 60 mm
619003 $l=5$ to 100 mm

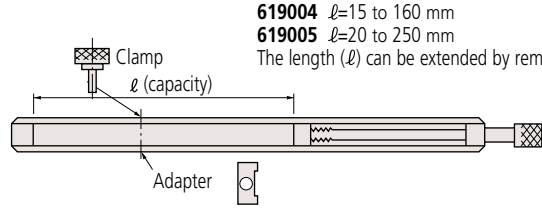

619004 $l=15$ to 160 mm
619005 $l=20$ to 250 mm
The length (l) can be extended by removing the adapter.


Base 619009

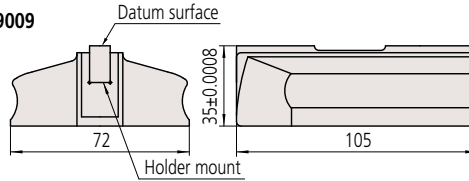

Flatness of the datum surface 0.5 μ m
Parallelism 0.8 μ m
Flatness of the bottom surface 1 μ m


Half-round jaws

Type I




Flatness of the datum surface 0.5 μ m
Parallelism of A 0.5 μ m

Type II

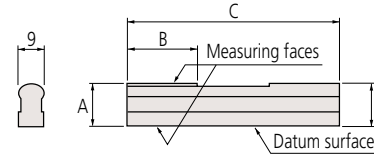


| Code No. | Type | Size (mm) | A (mm) | B (mm) | C (mm) | D (mm) |
|----------|------|-----------|-----------|--------|--------|--------|
| 619010* | I | 2 | 2±0.0005 | 5.5 | 40 | 7.5 |
| 619011* | | 5 | 5±0.0005 | 15.5 | 45 | 7.5 |
| 619012* | | 8 | 8±0.0005 | 20 | 50 | 8.5 |
| 619013* | II | 12 | 12±0.0005 | 25 | 75 | 13 |
| 619014* | | 20 | 20±0.0005 | 25 | 125 | 20.5 |

Plain jaw (B type) 619018*




Flatness of the datum surface 1 μ m

Scriber point 619019




Flatness of the datum surface 0.5 μ m

Center point 619020




Eccentricity tolerance of the point ±10 μ m
Flatness of the datum surface 0.5 μ m

Tram point 619021*



Eccentricity tolerance of the point ±10 μ m
Flatness of the datum surface 0.5 μ m

Triangular straightedge (for handheld use only)

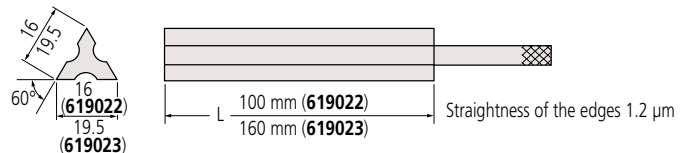

* A single piece is supplied for each code number, except for half-round jaws, plain jaws (B type) and tram points, which are supplied as a two-pack.



Tài liệu được tổng hợp bởi đội ngũ kỹ thuật của NPOWER
Bản quyền nội dung thuộc về Mitutoyo
Powered by NAVITECH | www.navitech.co
www.npower.com.vn

Gauge Blocks

Accessories for Rectangular Gauge Blocks over 100 mm SERIES 516

- Specially designed for long rectangular gauge blocks of 100 mm and over which have two coupling holes in the body: coupling of two long gauge blocks, a stack of regular gauge blocks and attachment of jaws is possible.
- Can be used with both long steel and CERA blocks.




516-605
(14 pcs.)

SPECIFICATIONS


| Set code No. | Code No. | Description | Quantity Supplied |
|--------------|----------|--------------------|-------------------|
| 516-605 | 619031 | Connector A | 1 pc. |
| | 619032 | Connector B | |
| | 619033 | Connector C | |
| | 619034 | Connector D | |
| | 619035 | Connector E | |
| | 619036 | Adapter | 3 pcs. |
| | 619009 | Base | 1 pc. |
| | 619018 | Plain jaw (B-type) | 2 pcs. |
| | 619013 | Half-round jaw | |
| | 619019 | Scriber point | 1 pc. |

Connector A 619031



Used for directly coupling two long gauge blocks.

Connectors B and C




Unit: mm

| Code No. | l (max.) | L | Connector | Adapter Qty. |
|----------|----------|-----|-------------|--------------|
| 619032 | 90 | 126 | Connector B | 2 |
| 619033 | 200 | 236 | Connector C | |

Adapter (2 pcs.) 619036

In addition to connecting long gauge blocks, the holders can also connect long gauge blocks with other types of gauge blocks inserted in between. Connector B is for gauge blocks with nominal size of 40 mm or less, and connector C for gauge blocks with nominal size of 150 mm or less (connector C can also be used to connect hole-less gauge blocks of 100 mm or less with various types of jaw). Adapters can be used to attach jaws on the edges of long gauge blocks.


Typical application

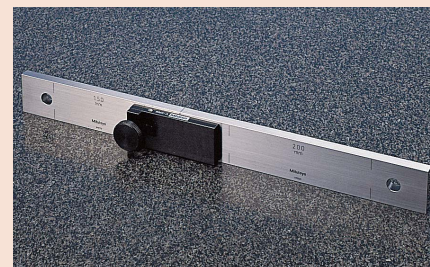

Using an A-type connector



Use of B-type connectors in gage construction

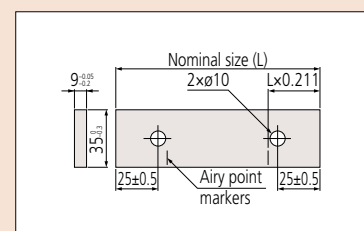


Coupling holes in long gauge blocks

Typical application




Setting a dial test indicator to a long-gauge-block stack attached to the base with a D-type connector

Connector D 619034




Used for attaching a long gauge block directly to the base.

Connector E 619035

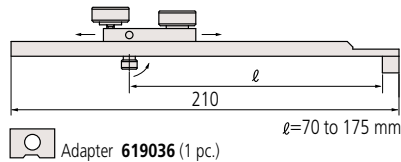


Used for attaching a long gauge block to the base over a stack of regular gauge blocks wrung between the base and long gauge block. The length l is highly adjustable to accommodate the variable length of the stack.

Base 619009

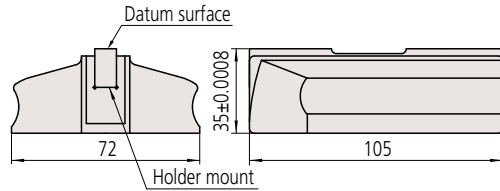


Flatness of the datum surface 0.5 μ m
Parallelism 0.8 μ m
Flatness of the bottom surface 1 μ m

Plain jaw (B-type) 619018




Flatness of the datum surface 1 μ m

Half-round jaw 619013

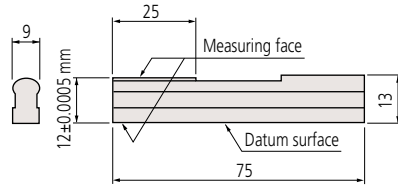

Flatness of the datum surface 0.5 μ m
Parallelism 0.5 μ m

Scriber point 619019



Flatness of the datum surface 0.5 μ m

Example of use of accessories with long gauge blocks

The table below shows the appropriate combination of long rectangular gauge blocks and accessories for making inside and outside measurements in the approximate range 300 mm to 1000 mm in 100 mm steps. The numbers in the table represent the number of gauge blocks or accessories in use. Note that the ranges shown do not take into account the combined thickness of the half-round jaws for inside measurement (24 mm) and the length of any regular gauge block stack used.

| Items | Code No. | 300 mm | | 400 mm | | 500 mm | | 600 mm | | 700 mm | | 800 mm | | 900 mm | | 1000 mm | |
|---|----------|--------|-------|--------|-------|--------|-------|--------|-------|--------|-------|--------|-------|--------|-------|---------|-------|
| | | Inner | Outer | Inner | Outer | Inner | Outer | Inner | Outer | Inner | Outer | Inner | Outer | Inner | Outer | Inner | Outer |
| Rectangular gauge block (nominal dimension) | 200 mm | 611682 | | | | | | | 1 | 1 | | | | | | | |
| | 300 mm | 611683 | 1 | 1 | | | | | | | 1 | 1 | 1 | 1 | | | |
| | 400 mm | 611684 | | | 1 | 1 | | | 1 | 1 | 1 | 1 | | 1 | 1 | | |
| | 500 mm | 611685 | | | | | 1 | 1 | | | | | 1 | 1 | 1 | 1 | 2 |
| Connector A | 619031 | | | | | | | | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Connector B* | 619032 | 2 | | 2 | | 2 | | 2 | | 2 | | 2 | | 2 | | 2 | |
| Half-round jaws 2 pcs./set | 619013 | 2 | | 2 | | 2 | | 2 | | 2 | | 2 | | 2 | | 2 | |
| Adapter | 619036 | (2) | | (2) | | (2) | | (2) | | (2) | | (2) | | (2) | | (2) | |

* Provided with adapters (2 pcs.).



Tài liệu được tổng hợp bởi đội ngũ kỹ thuật của NPOWER
Bản quyền nội dung thuộc về Mitutoyo

Powered by NAVITECH | www.navitech.co
www.npower.com.vn

Gauge Blocks



Metric/Inch Square Gauge Block Sets SERIES 516 — Metric Block Sets, Long Block Sets, Wear Block Sets

- A square gauge block can retain stable orientation both longitudinally and laterally. A wide range of application measurements can be made. From various sets of 2 pieces up to 112 pieces, you can select the best type for your application.
- Always use genuine gauge block accessories.



Steel 112-block set



Steel 103-block set



Steel 76-block set



Steel 47-block set



Steel 32-block set

Wear block set



Tungsten Carbide

Long block set



Steel 8-block set


These square wear gauge blocks made of cemented carbide have excellent resistance to abrasion, making them ideal for protecting the ends of a stack of blocks subject to frequent use. Available in two nominal sizes: 1 mm and 2 mm. We recommend that these wear gauge blocks of both sizes be wrung firmly to the stack when in use.



***1: Suffix No. (■) for Selecting Standard and Certificate Provided**

| ISO/JIS | | |
|------------|------------------------|-------------------------|
| Suffix No. | Inspection Certificate | Calibration Certificate |
| 1 | ✓ | JCSS |
| 6 | ✓ | ✓ |

| ASME | | |
|------------|------------------------|-------------------------|
| Suffix No. | Inspection Certificate | Calibration Certificate |
| 1 | ✓ | JCSS |



Inspection Certificate

SPECIFICATIONS

Metric Block Sets

| Blocks per set | Code No. | | Standard/grade available and Suffix No.*1 | | Blocks included in set | | |
|----------------|----------|------|---|---------|------------------------|-----------|------|
| | Steel | CERA | ISO/JIS | ASME | Size (mm) | Step (mm) | Qty. |
| 112 | 516-437 | — | — | 00: -■6 | 1.005 | — | 1 |
| | 516-438 | — | 0: -■0 | 0: -■6 | 1.001 - 1.009 | 0.001 | 9 |
| | 516-439 | — | 1: -■0 | 1: -■6 | 1.01 - 1.49 | 0.01 | 49 |
| | 516-440 | — | 2: -■0 | 2: -■6 | 0.5 - 24.5 | 0.5 | 49 |
| 103 | — | — | — | — | 25 - 100 | 25 | 4 |
| | 516-441 | — | — | 00: -■6 | 1.005 | — | 1 |
| | 516-442 | — | 0: -■0 | 0: -■6 | 1.01 - 1.49 | 0.01 | 49 |
| | 516-443 | — | 1: -■0 | 1: -■6 | 0.5 - 24.5 | 0.5 | 49 |
| 76 | 516-444 | — | 2: -■0 | 2: -■6 | 25 - 100 | 25 | 4 |
| | 516-449 | — | — | 00: -■6 | 1.005 | — | 1 |
| | 516-450 | — | 0: -■0 | 0: -■6 | 1.01 - 1.49 | 0.01 | 49 |
| | 516-451 | — | 1: -■0 | 1: -■6 | 0.5 - 9.5 | 0.5 | 19 |
| 47 | 516-452 | — | 2: -■0 | 2: -■6 | 10 - 40 | 10 | 4 |
| | — | — | — | — | 50 - 100 | 25 | 3 |
| | 516-457 | — | — | 00: -■6 | 1.005 | — | 1 |
| | 516-458 | — | 0: -■0 | 0: -■6 | 1.01 - 1.09 | 0.01 | 9 |
| 32 | 516-459 | — | 1: -■0 | 1: -■6 | 1.1 - 1.9 | 0.1 | 9 |
| | 516-460 | — | 2: -■0 | 2: -■6 | 1 - 24 | 1 | 24 |
| | — | — | — | — | 25 - 100 | 25 | 4 |
| | 516-465 | — | — | 00: -■6 | 1.005 | — | 1 |
| 32 | 516-466 | — | 0: -■0 | 0: -■6 | 1.01 - 1.09 | 0.01 | 9 |
| | 516-467 | — | 1: -■0 | 1: -■6 | 1.1 - 1.9 | 0.1 | 9 |
| | 516-468 | — | 2: -■0 | 2: -■6 | 1 - 9 | 1 | 9 |
| | — | — | — | — | 10 - 30 | 10 | 3 |
| 32 | — | — | — | — | 60 | — | 1 |

Metric Long Block Sets

| Blocks per set | Code No. | | Standard/grade available and Suffix No.*1 | | Blocks included in set | | |
|----------------|----------|------|---|---------|------------------------|-----------|------|
| | Steel | CERA | ISO/JIS | ASME | Size (mm) | Step (mm) | Qty. |
| 8 | 516-751 | — | — | 00: -■6 | 125, 150, 175 | 25 | 3 |
| | 516-752 | — | 0: -■0 | 0: -■6 | 200, 250 | 50 | 2 |
| | 516-753 | — | 1: -■0 | 1: -■6 | 300, 400, 500 | 100 | 3 |
| | 516-754 | — | 2: -■0 | 2: -■6 | — | — | — |

Metric Wear Block Sets

| Blocks per set | Code No. | | Standard/grade available and Suffix No.*1 | | Blocks included in set | | |
|----------------|----------|------|---|------|------------------------|-----------|------|
| | Steel | CERA | ISO/JIS | ASME | Size (mm) | Step (mm) | Qty. |
| 2 | 516-820 | — | 0: -■0 | — | 1 | — | 2 |
| | 516-821 | — | 1: -■0 | — | — | — | — |
| 2 | 516-822 | — | 0: -■0 | — | 2 | — | 2 |
| | 516-823 | — | 1: -■0 | — | — | — | — |

Inch Block Sets

| Blocks per set | Code No. | | Standard/grade available and Suffix No.*1 | | Blocks included in set | | |
|----------------|----------|---------|---|---------|------------------------|-----------|------|
| | Steel | CERA | ISO/JIS | ASME | Size (in) | Step (in) | Qty. |
| 81 | 516-401 | 516-201 | — | 00: -■6 | 0.1001 - 0.1009 | 0.0001 | 9 |
| | 516-402 | 516-202 | — | 0: -■6 | 0.101 - 0.149 | 0.001 | 49 |
| | 516-403 | 516-203 | — | 1: -■6 | 0.05 - 0.95 | 0.05 | 19 |
| | 516-404 | 516-204 | — | 2: -■6 | 1 - 4 | 1 | 4 |
| 36 | 516-421 | 516-221 | — | 00: -■6 | 0.05 | — | 1 |
| | 516-422 | 516-222 | — | 0: -■6 | 0.1001 - 0.1009 | 0.0001 | 9 |
| | 516-423 | 516-223 | — | 1: -■6 | 0.101 - 0.109 | 0.001 | 9 |
| | 516-424 | 516-224 | — | 2: -■6 | 0.11 - 0.19 | 0.01 | 9 |
| | — | — | — | — | 0.1 - 0.5 | 0.1 | 5 |
| | — | — | — | — | 1, 2, 4 | 1 | 3 |
| 28 | 516-417 | — | — | 00: -■6 | 0.02005 | — | 1 |
| | 516-418 | — | — | 0: -■6 | 0.0201 - 0.0209 | 0.0001 | 9 |
| | 516-419 | — | — | 1: -■6 | 0.021 - 0.029 | 0.001 | 9 |
| | 516-420 | — | — | 2: -■6 | 0.010 - 0.090 | 0.01 | 9 |

Inch Long Block Sets

| Blocks per set | Code No. | | Standard/grade available and Suffix No.*1 | | Blocks included in set | | |
|----------------|----------|------|---|--------|------------------------|-----------|------|
| | Steel | CERA | ISO/JIS | ASME | Size (in) | Step (in) | Qty. |
| 8 | 516-762 | — | — | 0: -■0 | 5 - 7 | 1 | 3 |
| | 516-763 | — | — | 1: -■0 | 8, 10, 12 | 2 | 3 |
| | — | — | — | — | 16, 20 | 4 | 2 |

Inch Wear Block Sets

| Blocks per set | Code No. | | Standard/grade available and Suffix No.*1 | | Blocks included in set | | |
|----------------|----------|---------|---|--------|------------------------|-----------|------|
| | Carbide | CERA | ISO/JIS | ASME | Size (in) | Step (in) | Qty. |
| 2 | 516-824 | 516-846 | — | 0: -■0 | 0.05 | — | 2 |
| | 516-825 | 516-847 | — | 1: -■0 | — | — | — |
| 2 | 516-826 | 516-844 | — | 0: -■0 | 0.1 | — | 2 |
| | 516-827 | 516-845 | — | 1: -■0 | — | — | — |



Tài liệu được tổng hợp bởi đội ngũ kỹ thuật của NPOWER
Bản quyền nội dung thuộc về Mitutoyo

Powered by NAVITECH | www.navitech.co
www.npower.com.vn

Gauge Blocks

Individual Metric Square Gauge Blocks

- One or more gauge blocks can be purchased separately. Purchasing them loose is helpful. If using only one length repeatedly, it is good practice to purchase discrete gauge blocks.
- Each gauge block is supplied with an inspection certificate. When placing an order, please give us the code number with the suffix number corresponding to the applicable standard (see the suffix list).
- We make custom length gauge blocks.
- Always use genuine gauge block accessories.



SPECIFICATIONS

Metric Blocks

| Length (mm) | Code No. | |
|-------------|----------|------|
| | Steel | CERA |
| 0.5 | 614506 | — |
| 1 | 614611 | — |
| 1.0005 | 614520 | — |
| 1.001 | 614521 | — |
| 1.002 | 614522 | — |
| 1.003 | 614523 | — |
| 1.004 | 614524 | — |
| 1.005 | 614525 | — |
| 1.006 | 614526 | — |
| 1.007 | 614527 | — |
| 1.008 | 614528 | — |
| 1.009 | 614529 | — |
| 1.01 | 614561 | — |
| 1.02 | 614562 | — |
| 1.03 | 614563 | — |
| 1.04 | 614564 | — |
| 1.05 | 614565 | — |
| 1.06 | 614566 | — |
| 1.07 | 614567 | — |
| 1.08 | 614568 | — |
| 1.09 | 614569 | — |
| 1.1 | 614570 | — |
| 1.11 | 614571 | — |
| 1.12 | 614572 | — |
| 1.13 | 614573 | — |
| 1.14 | 614574 | — |
| 1.15 | 614575 | — |
| 1.16 | 614576 | — |
| 1.17 | 614577 | — |
| 1.18 | 614578 | — |
| 1.19 | 614579 | — |
| 1.2 | 614580 | — |
| 1.21 | 614581 | — |
| 1.22 | 614582 | — |
| 1.23 | 614583 | — |
| 1.24 | 614584 | — |
| 1.25 | 614585 | — |
| 1.26 | 614586 | — |
| 1.27 | 614587 | — |
| 1.28 | 614588 | — |
| 1.29 | 614589 | — |
| 1.3 | 614590 | — |
| 1.31 | 614591 | — |
| 1.32 | 614592 | — |

| Length (mm) | Code No. | |
|-------------|----------|------|
| | Steel | CERA |
| 1.33 | 614593 | — |
| 1.34 | 614594 | — |
| 1.35 | 614595 | — |
| 1.36 | 614596 | — |
| 1.37 | 614597 | — |
| 1.38 | 614598 | — |
| 1.39 | 614599 | — |
| 1.4 | 614600 | — |
| 1.41 | 614601 | — |
| 1.42 | 614602 | — |
| 1.43 | 614603 | — |
| 1.44 | 614604 | — |
| 1.45 | 614605 | — |
| 1.46 | 614606 | — |
| 1.47 | 614607 | — |
| 1.48 | 614608 | — |
| 1.49 | 614609 | — |
| 1.5 | 614641 | — |
| 1.6 | 614516 | — |
| 1.7 | 614517 | — |
| 1.8 | 614518 | — |
| 1.9 | 614519 | — |
| 2 | 614612 | — |
| 2.5 | 614642 | — |
| 3 | 614613 | — |
| 3.5 | 614643 | — |
| 4 | 614614 | — |
| 4.5 | 614644 | — |
| 5 | 614615 | — |
| 5.5 | 614645 | — |
| 6 | 614616 | — |
| 6.5 | 614646 | — |
| 7 | 614617 | — |
| 7.5 | 614647 | — |
| 8 | 614618 | — |
| 8.5 | 614648 | — |
| 9 | 614619 | — |
| 9.5 | 614649 | — |
| 10 | 614671 | — |
| 10.5 | 614650 | — |
| 11 | 614621 | — |
| 11.5 | 614651 | — |
| 12 | 614622 | — |
| 12.5 | 614652 | — |

| Length (mm) | Code No. | |
|-------------|----------|------|
| | Steel | CERA |
| 13 | 614623 | — |
| 13.5 | 614653 | — |
| 14 | 614624 | — |
| 14.5 | 614654 | — |
| 15 | 614625 | — |
| 15.5 | 614655 | — |
| 16 | 614626 | — |
| 16.5 | 614656 | — |
| 17 | 614627 | — |
| 17.5 | 614657 | — |
| 18 | 614628 | — |
| 18.5 | 614658 | — |
| 19 | 614629 | — |
| 19.5 | 614659 | — |
| 20 | 614672 | — |
| 20.5 | 614660 | — |
| 21 | 614631 | — |
| 21.5 | 614661 | — |
| 22 | 614632 | — |
| 22.5 | 614662 | — |
| 23 | 614633 | — |
| 23.5 | 614663 | — |
| 24 | 614634 | — |
| 24.5 | 614664 | — |
| 25 | 614635 | — |
| 30 | 614673 | — |
| 40 | 614674 | — |
| 50 | 614675 | — |
| 60 | 614676 | — |
| 75 | 614801 | — |
| 100 | 614681 | — |
| 125 | 614802 | — |
| 150 | 614803 | — |
| 175 | 614804 | — |
| 200 | 614682 | — |
| 250 | 614805 | — |
| 300 | 614683 | — |
| 400 | 614684 | — |
| 500 | 614685 | — |


| Metric Wear Blocks | |
|--------------------|------------------------------|
| Length (mm) | Code No. Tungsten carbide |
| 1 | 615611 |
| 2 | 615612 |



Suffix No. (- ■■■■) for Selecting Standard and Certificate Provided

| ISO / JIS | | | |
|------------|-------|------------------------|---------------------------------|
| Suffix No. | Grade | Inspection Certificate | Calibration Certificate JCSS |
| -021 | 0 | ✓ | |
| -026 | 0 | ✓ | ✓ |
| -031 | 1 | ✓ | |
| -036 | 1 | ✓ | ✓ |
| -041 | 2 | ✓ | |
| -046 | 2 | ✓ | ✓ |

| ASME | | | |
|------------|-------|------------------------|---------------------------------|
| Suffix No. | Grade | Inspection Certificate | Calibration Certificate JCSS |
| -521 | 00 | ✓ | |
| -531 | 0 | ✓ | |
| -541 | 1 | ✓ | |
| -551 | 2 | ✓ | |



Inspection Certificate


Note: Details of the overall sizes for forms of block are given on pages 01-3 and 01-26, and the accuracy standards to which they are manufactured are given on page 01-5.



Individual Inch Square Gauge Blocks

*1: Suffix No. (-■■■) for Selecting Grade and Certificate Provided

| ASME | | | |
|------------|-------|------------------------|-------------------------|
| Suffix No. | Grade | Inspection Certificate | Calibration Certificate |
| -521 | 00 | ✓ | JCSS |
| -531 | 0 | ✓ | |
| -541 | 1 | ✓ | |
| -551 | 2 | ✓ | |




Inspection Certificate


Dimensions

Unit: mm


Nominal length: 0.5 mm to 4.5 mm (0.010 in to 0.19 in)

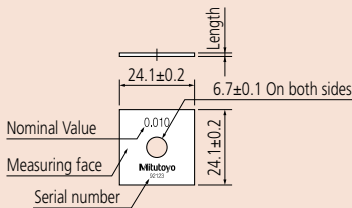


Nominal length: 5 mm to 14.5 mm (0.2 in to 0.450 in)



Nominal length: 15 mm to 500 mm (0.500 in to 20 in)



Nominal length: 125 mm to 500 mm (5 in to 20 in)

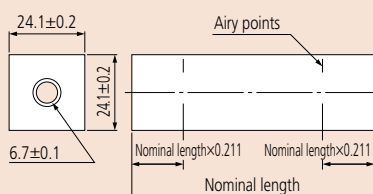

SPECIFICATIONS

Inch Blocks

| Length (in) | Code No.*1 | |
|-----------------|------------|--------|
| | Steel | CERA |
| 0.01 | 614310 | — |
| 0.02005 | 614240 | — |
| 0.0201 | 614231 | — |
| 0.0202 | 614232 | — |
| 0.0203 | 614233 | — |
| 0.0204 | 614234 | — |
| 0.0205 | 614235 | — |
| 0.0206 | 614236 | — |
| 0.0207 | 614237 | — |
| 0.0208 | 614238 | — |
| 0.0209 | 614239 | — |
| 0.02 | 614320 | — |
| 0.021 | 614321 | — |
| 0.022 | 614322 | — |
| 0.023 | 614323 | — |
| 0.024 | 614324 | — |
| 0.025 | 614325 | — |
| 0.026 | 614326 | — |
| 0.027 | 614327 | — |
| 0.028 | 614328 | — |
| 0.029 | 614329 | — |
| 0.03 | 614330 | — |
| 0.03125 (1/32) | 614301 | — |
| 0.04 | 614340 | — |
| 0.046875 (3/64) | 614302 | — |
| 0.05 | 614105 | 616105 |
| 0.06 | 614106 | — |
| 0.0625 | 614303 | 616303 |
| 0.07 | 614107 | — |
| 0.078125 (5/64) | 614304 | — |
| 0.08 | 614108 | — |
| 0.09 | 614109 | — |
| 0.09375 (3/32) | 614305 | — |
| 0.1 | 614191 | 616191 |
| 0.100025 | 614307 | — |
| 0.10005 | 614135 | 616135 |
| 0.100075 | 614308 | — |
| 0.1001 | 614121 | 616121 |
| 0.1002 | 614122 | 616122 |
| 0.1003 | 614123 | 616123 |
| 0.1004 | 614124 | 616124 |
| 0.1005 | 614125 | 616125 |
| 0.1006 | 614126 | 616126 |
| 0.1007 | 614127 | 616127 |
| 0.1008 | 614128 | 616128 |
| 0.1009 | 614129 | 616129 |
| 0.101 | 614141 | 616141 |
| 0.102 | 614142 | 616142 |
| 0.103 | 614143 | 616143 |
| 0.104 | 614144 | 616144 |
| 0.105 | 614145 | 616145 |

| Length (in) | Code No.*1 | |
|-----------------|------------|--------|
| | Steel | CERA |
| 0.106 | 614146 | 616146 |
| 0.107 | 614147 | 616147 |
| 0.108 | 614148 | 616148 |
| 0.109 | 614149 | 616149 |
| 0.109375 (7/64) | 614306 | — |
| 0.11 | 614150 | 616150 |
| 0.111 | 614151 | 616151 |
| 0.112 | 614152 | 616152 |
| 0.113 | 614153 | 616153 |
| 0.114 | 614154 | 616154 |
| 0.115 | 614155 | 616155 |
| 0.116 | 614156 | 616156 |
| 0.117 | 614157 | 616157 |
| 0.118 | 614158 | 616158 |
| 0.119 | 614159 | 616159 |
| 0.12 | 614160 | 616160 |
| 0.121 | 614161 | 616161 |
| 0.122 | 614162 | 616162 |
| 0.123 | 614163 | 616163 |
| 0.124 | 614164 | 616164 |
| 0.125 | 614165 | 616165 |
| 0.126 | 614166 | 616166 |
| 0.127 | 614167 | 616167 |
| 0.128 | 614168 | 616168 |
| 0.129 | 614169 | 616169 |
| 0.13 | 614170 | 616170 |
| 0.131 | 614171 | 616171 |
| 0.132 | 614172 | 616172 |
| 0.133 | 614173 | 616173 |
| 0.134 | 614174 | 616174 |
| 0.135 | 614175 | 616175 |
| 0.136 | 614176 | 616176 |
| 0.137 | 614177 | 616177 |
| 0.138 | 614178 | 616178 |
| 0.139 | 614179 | 616179 |
| 0.14 | 614180 | 616180 |
| 0.141 | 614181 | 616181 |
| 0.142 | 614182 | 616182 |
| 0.143 | 614183 | 616183 |
| 0.144 | 614184 | 616184 |
| 0.145 | 614185 | 616185 |
| 0.146 | 614186 | 616186 |
| 0.147 | 614187 | 616187 |
| 0.148 | 614188 | 616188 |
| 0.149 | 614189 | 616189 |
| 0.15 | 614115 | 616115 |
| 0.16 | 614116 | 616116 |
| 0.17 | 614117 | 616117 |
| 0.18 | 614118 | 616118 |
| 0.19 | 614119 | 616119 |
| 0.2 | 614192 | 616192 |

| Length (in) | Code No.*1 | |
|-------------|------------|--------|
| | Steel | CERA |
| 0.25 | 614212 | 616212 |
| 0.3 | 614193 | 616193 |
| 0.35 | 614213 | 616213 |
| 0.375 (3/8) | 614309 | — |
| 0.4 | 614194 | 616194 |
| 0.45 | 614214 | 616214 |
| 0.5 | 614195 | 616195 |
| 0.55 | 614215 | 616215 |
| 0.6 | 614196 | 616196 |
| 0.65 | 614216 | 616216 |
| 0.7 | 614197 | 616197 |
| 0.75 | 614217 | 616217 |
| 0.8 | 614198 | 616198 |
| 0.85 | 614218 | 616218 |
| 0.9 | 614199 | 616199 |
| 0.95 | 614219 | 616219 |
| 1 | 614201 | 616201 |
| 2 | 614202 | 616202 |
| 3 | 614203 | 616203 |
| 4 | 614204 | 616204 |
| 5 | 614205 | — |
| 6 | 614206 | — |
| 7 | 614207 | — |
| 8 | 614208 | — |
| 10 | 614222 | — |
| 12 | 614223 | — |
| 16 | 614224 | — |
| 20 | 614225 | — |

Inch Wear Blocks

| Length (in) | Code No. |
|-------------|------------------|
| | Tungsten carbide |
| 0.05 | 615105 |
| 0.1 | 615191 |

Note: Details of the overall sizes for forms of block are given on page 01-3 and the accuracy standards to which they are manufactured are given on page 01-5.

Gauge Blocks

Square Gauge Block Accessories Set SERIES 516

- Mitutoyo offers the gauge block accessories set to expand the variety of square gauge block applications. Square gauge blocks with a hole at their center are much more widely used than rectangular gauge blocks. We also sell the accessories loose to meet your needs.
- Always use genuine gauge block accessories.



516-611

SPECIFICATIONS

| Metric | | | Inch | | |
|----------------|-----------------------------|-------------------|----------------|-----------------------------|-------------------|
| Code No. | Included in set | Quantity Supplied | Code No. | Included in set | Quantity Supplied |
| 516-611 | | | 516-612 | | |
| 619070 | Half-round jaw 2 mm | 2 pcs. | 619050 | Half-round jaw 0.125 in | 2 pcs. |
| 619071 | Half-round jaw 5 mm | | 619051 | Half-round jaw 0.25 in | |
| 619072 | Plain jaw 10 mm | 1 pc. | 619052 | Plain jaw 0.5 in | 1 pc. |
| 619073 | Center point 2 mm | | 619053 | Center point 0.1 in | |
| 619054 | Scriber point | | 619054 | Scriber point | |
| 619074 | Base 10 mm | | 619055 | Base 0.5 in | |
| 619056 | Stud | | 619056 | Stud | |
| 619057 | Flat head screw 1 1/4 in | | 2 pcs. | 619057 | |
| 619058 | Flat head screw 5/8 in | 619058 | | Flat head screw 5/8 in | |
| 619059 | Slotted head nut | 619059 | | Slotted head nut | |
| 619060 | Adjustable tie rod 6 in | 619060 | | Adjustable tie rod 6 in | |
| 619061 | Adjustable tie rod 4 1/2 in | 1 pc. | 619061 | Adjustable tie rod 4 1/2 in | 1 pc. |
| 619062 | Tie rod 3 in | | 619062 | Tie rod 3 in | |
| 619063 | Tie rod 2 1/4 in | | 619063 | Tie rod 2 1/4 in | |
| 619064 | Tie rod 1 1/2 in | | 619064 | Tie rod 1 1/2 in | |
| 619065 | Tie rod 3/4 in | 2 pcs. | 619065 | Tie rod 3/4 in | 2 pcs. |
| 619066 | Knurled head screw | | 619066 | Knurled head screw | |


Note: 2 pcs. of half-round jaw, plain jaw, stud, flat head screw, slotted head nut, adjustable tie rod, and knurled head screw are included in each set. Please note that the abovementioned code number indicates only 1 set.

Typical application



Using plain jaws, tie rods, knurled head screws and gauge blocks, a gage was constructed to enable rapid comparison measurement of a stepped workpiece. (Sample workpiece)


Measurement example

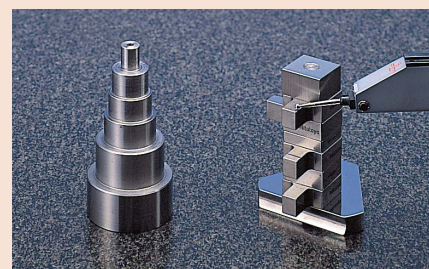

Using a base, plain jaws, tie rods, flat head screws and gauge blocks, a gage was constructed to enable rapid comparison measurement of a stepped workpiece. (Sample workpiece)

Note: Accuracy when using third-party accessories is not guaranteed.


Half-round jaw



| Code No. | R (mm) | L (mm) | W (mm) | H (mm) |
|----------|--------|--------|--------|--------|
| 619070 | 1.95 | 2 | 33.6 | 5.3 |
| 619071 | 4.95 | 5 | 39.9 | 10.3 |


- Flatness 0.5 μm
- Parallelism of L 0.5 μm
- Tolerance of L $\pm 0.5 \mu\text{m}$

Scriber point 619054

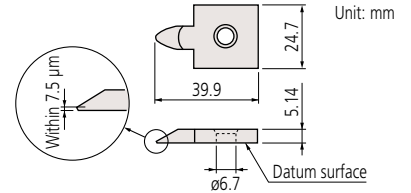


- Flatness of datum surface 0.5 μm

Plain jaw 619072




- Flatness 0.12 μm
- Parallelism 0.12 μm
- A and B are datum surfaces

Slotted head nut 619059




Base 619074




- Flatness 1.5 μm
- Parallelism 1.5 μm (The surface within 1.5 mm of edge is excluded)

Center point 619073




- Flatness 0.5 μm

Flat head screw



| Code No. | L (mm) |
|----------|--------|
| 619057 | 31.6 |
| 619058 | 15.8 |

Knurled head screw 619066



- Contraction caused by the clamping force

The minimum recommended torque to be applied to the clamping screws is approximately 600 mN·m. The chart below shows the approximate length contraction of a 100 mm gage stack using typical torque values.

| Driver | Contraction |
|------------------------------------|----------------------------------|
| Torque Driver 600 mN·m | 0.2 $\mu\text{m}/100 \text{ mm}$ |
| Ordinary Driver 700 to 800 mN·m | 0.3 $\mu\text{m}/100 \text{ mm}$ |



Tài liệu được tổng hợp bởi đội ngũ kỹ thuật của NPOWER
Bản quyền nội dung thuộc về Mitutoyo


Powered by NAVITECH | www.navitech.co
www.npower.com.vn

Gauge Blocks


Square Gauge Block Accessories Set SERIES 516

Adjustable tie rod

Unit: mm




| Code No. | L (mm) | M (mm) | P (mm) | n (Number of holes) |
|----------|--------|--------|--------|---------------------|
| 619060 | 124.5 | 3.85 | 6.35 | 14 |
| 619061 | 86.5 | 3.95 | 6.35 | 8 |




Tie rod

Unit: mm






| Code No. | L (mm) |
|----------|--------|
| 619065 | 19 |
| 619064 | 38 |
| 619063 | 57 |
| 619062 | 76 |



Stud 619056

Unit: mm



Accessories used for combining square gauge blocks


| Code No. | Included in set | Overall length (mm) | | | | | | | | | | | | | | | |
|----------|--------------------|---------------------|----|----|----|----|----|----|----|----|----|----|-----|-----|-----|-----|--|
| | | Min. | 21 | 36 | 34 | 41 | 45 | 58 | 64 | 72 | 82 | 91 | 95 | 109 | 117 | | |
| 619059 | Slotted head nut | Max. | 30 | 43 | 43 | 50 | 60 | 72 | 79 | 88 | 91 | 97 | 107 | 109 | 125 | 135 | |
| 619058 | Flat head screw | | 1 | | 2 | 1 | 2 | 1 | 2 | | 1 | 2 | | 1 | | 1 | |
| 619057 | | | | 1 | | | | 1 | | 2 | 1 | | 2 | 1 | 2 | 1 | |
| 619056 | Stud | | | | | 1 | | | | | | | | | | 1 | |
| 619065 | Tie rod | | | | 1 | 1 | | | | | | | | | | 1 | |
| 619064 | | | | | | | 1 | 1 | | 1 | | | | | | | |
| 619063 | | | | | | | | | 1 | | 1 | | 1 | | | | |
| 619062 | | | | | | | | | | | | 1 | | 1 | 1 | 1 | |
| 619061 | Adjustable tie rod | | | | 2 | | 2 | | 2 | | | | | | 2 | 2 | |
| 619060 | | | | | | | | 2 | | 2 | | 2 | 2 | 2 | 2 | 2 | |

| Code No. | Included in set | Overall length (mm) | | | | | | | | | | | | | |
|----------|--------------------|---------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| | | Min. | 130 | 148 | 121 | 167 | 143 | 160 | 205 | 180 | 223 | 240 | 258 | 295 | 375 |
| 619059 | Slotted head nut | Max. | 150 | 169 | 180 | 184 | 210 | 255 | 270 | 285 | 288 | 345 | 363 | 445 | 520 |
| 619058 | Flat head screw | | | | 2 | | | 2 | | | | | | | |
| 619057 | | | 2 | 2 | | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| 619056 | Stud | | 1 | 1 | | 1 | | | 1 | | 1 | 1 | 1 | 1 | 2 |
| 619065 | Tie rod | | 1 | | | | | | | | | | | | |
| 619064 | | | | 1 | | | | | | | | | | | |
| 619063 | | | | | | 1 | | | 1 | | 1 | | | | |
| 619062 | | | 1 | 1 | | 1 | | | | | 1 | | 1 | | 1 |
| 619061 | Adjustable tie rod | | | | 2 | | 2 | | 2 | | 2 | | | 2 | 2 |
| 619060 | | | | | | | | 2 | | 2 | | 2 | 2 | 2 | 2 |




Step Master SERIES 516

- Step master is a master gage of different height that is useful for the z-axis (vertical direction) calibration of optical instruments.
- Each adjacent step is measured down to 0.01 μm by using an interferometer within ±0.20 μm allowance.
- Steel and ceramic types are available.

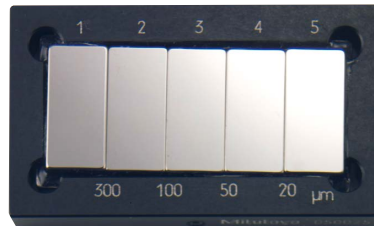

Steel type
516-199

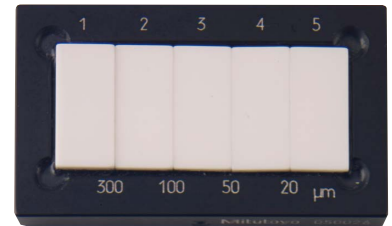

Ceramic type
516-499

SPECIFICATIONS

Steel type


| Code No. | 516-198 | | | | | 516-199 | | | | |
|---|---------|----|----|----|----|---------|-----|-----|-----|-----|
| Block No. | 1 | 2 | 3 | 4 | 5 | 1 | 2 | 3 | 4 | 5 |
| Cumulative step (μm) | 0 | 10 | 15 | 17 | 18 | 0 | 300 | 400 | 450 | 470 |
| Step value between adjacent blocks (μm) | | 10 | 5 | 2 | 1 | | 300 | 100 | 50 | 20 |

Ceramic type

| Code No. | 516-498 | | | | | 516-499 | | | | |
|---|---------|----|----|----|----|---------|-----|-----|-----|-----|
| Block No. | 1 | 2 | 3 | 4 | 5 | 1 | 2 | 3 | 4 | 5 |
| Cumulative step (μm) | 0 | 10 | 15 | 17 | 18 | 0 | 300 | 400 | 450 | 470 |
| Step value between adjacent blocks (μm) | | 10 | 5 | 2 | 1 | | 300 | 100 | 50 | 20 |

Note: ○○○ - ○○○ -24: Provided with Calibration Certificate

DIMENSIONS

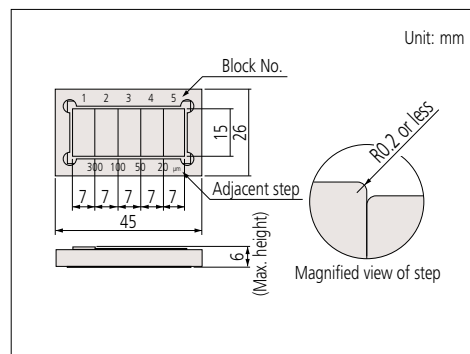

Tài liệu được tổng hợp bởi đội ngũ kỹ thuật của NPOWER
Bản quyền nội dung thuộc về Mitutoyo

Powered by NAVITECH | www.navitech.co
www.npower.com.vn

Custom-made Blocks & Gages

Gauge blocks

- We can provide gauge blocks in sizes for your specific needs. You can request a particular size you frequently use or a special size in small increments that cannot be created by wringing.
- Nominal size range
 - 0.1 mm to 1000 mm (steel)
 - 0.5 mm to 500 mm (ceramic)
 - 30 mm to 1000 mm (ZERO CERA Blocks)
- Nominal size increment
 - 0.0005 mm (up to 100 mm)
 - 0.001 mm (over 100 mm)
- Cross section (same as the standard product)
 - Nominal length of 10 mm or less: 30×9 mm
 - Nominal length of more than 10 mm: 35×9 mm
 - Square types are also available.


Reference gages

- We can provide gages in special dimensions not specified by JIS. Free yourself from the time-consuming work of gage creation by using our service that creates precision spacers and other gages in your preferred sizes. Gages with a hole or specified mark can also be created. Please contact us for details.
- Step masters
 - We can create your preferred height difference between adjacent blocks.

Notes on "coupling holes" on custom gauge blocks:

- Steel, from 100 mm to less than 500 mm
 - Without coupling holes
(Let us know if a hole is required)
- Steel, from 500 mm to less than 1000 mm
 - With coupling holes
(Let us know if a hole is not required)
- Ceramic, from 100 mm to less than 500 mm
 - With coupling holes
(Let us know if a hole is not required)

Special gauge blocks

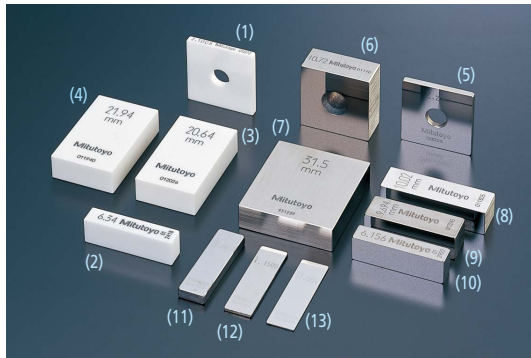


Ceramic

- (1) Square gauge block (2.1005 mm)
- (2) Rectangular gauge block (6.34 mm)
- (3) Rectangular gauge block (20.64 mm)
- (4) Rectangular gauge block (21.94 mm)

Steel

- (5) Square gauge block (2.2065 mm)
- (6) Square gauge block (10.72 mm)
- (7) Rectangular gauge block (31.5 mm)
- (8) Rectangular gauge block (10.02 mm)
- (9) Rectangular gauge block (9.694 mm)
- (10) Rectangular gauge block (6.156 mm)
- (11) Rectangular gauge block (3.603 mm)
- (12) Rectangular gauge block (1.1505 mm)
- (13) Rectangular gauge block (0.555 mm)

Special reference gages and step master (T: nominal size)

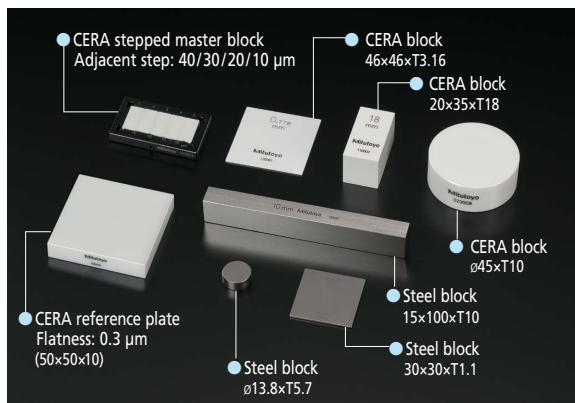

Unit: mm

Maintenance Kit for Gauge Blocks SERIES 516

Typical application



Recommendation for Regular Calibration

As is widely known, gauge blocks are end measures based on distance measurements traceable to the wavelength of the iodine stabilized He-Ne laser. Because they serve as the standard based on which measuring instruments are adjusted, even the smallest of errors can be critical. Therefore, we recommend periodical calibration even when use is infrequent. Please calibrate your gauge blocks as described in the table below (best practices may vary according to frequency of use and grade).

| Application | Cycle (years) | Grade |
|--------------------|---------------|--------|
| Reference standard | 1 to 2 | K |
| Calibration | 2 | K or 0 |
| Inspection | 2 | 0 or 1 |
| Shop floor | 0.5 to 1 | 1 or 2 |

As an accredited calibration laboratory, Mitutoyo offers a periodical calibration service for gauge blocks.

Our regular calibration service features:

- Gauge blocks manufactured by any maker can be calibrated.
 - Cleaning and removal of burrs.
 - Central dimension and dimensional deviations of each block are measured.
 - Calibration results are provided for immediate use and for building a calibration history of each block.
- For detailed information, contact the nearest Mitutoyo sales office.

- Maintenance kit for gauge blocks includes all the necessary maintenance tools for removing burrs and contamination, and applying anti-corrosion treatment after use.



516-650E

Code No. 516-650E

Tools and accessories included:

- (1) Ceraston (**601645**)
(both sides finished by lapping)
(100×25×12 mm)
- (2) Optical flat (**158-117**)
(ø45, 12 mm thickness, Flatness 0.2 μm)
Used to check the wringing of thin gauge blocks and for the presence of burrs.
- (3) Tweezers (**600004**)
Used for handling thin gauge blocks.
- (4) Blower brush (**600005**)
Used for blowing dust from measuring surfaces.
- (5) Cleaning paper (**600006**)
(lens paper, 82×304 mm, 500 pcs.)
Used for wiping off rust-preventative oil and contamination. Lint free.
- (6) Artificial leather mat (B4 size, Artificial buckskin) (**600007**)
Used as a gauge block mat in order to avoid scratches on the work table.
- (7) Reagent bottle (**600008**)
(polyethylene container, 100 ml)
Bottle of wiping solution.
(Mitutoyo employs n-Heptane for solvent.)
- (8) Gloves (**600009**)
Used for handling large gauge blocks.
Effective for the prevention of corrosion and thermal expansion.



Tài liệu được tổng hợp bởi đội ngũ kỹ thuật của **NPOWER**
Bản quyền nội dung thuộc về **Mitutoyo**

Powered by **NAVITECH** | www.navitech.co

www.npower.com.vn

Gauge Blocks

Ceraston SERIES 516 — Accessory for Gauge Block Maintenance

- Alumina-ceramic abrasive stone for removing burrs from hard materials such as ceramics that ordinary stones cannot handle.
- The grinding stones can be used on CERA Blocks and other steel gauge blocks. They are useful for removing burrs on any precision-processed surface.
- Excellent in durability and ease of removing burrs compared to Arkansas stones.
- Both sides can be used.



601644
150 (W) x 50 (D) x 20 (H) mm



601645
100 (W) x 25 (D) x 12 (H) mm

Removing burrs

Figure 1





Figure 2



- (1) Wipe any dust and oil film from the gauge block and the Ceraston (or Arkansas stone*) using a solvent.
- (2) Place the gauge block on the Ceraston (or Arkansas stone*) so that the measuring face that has burrs is on the abrasive surface of the stone. While applying light pressure, move the gauge block back and forth about ten times (Fig. 1). Use a rubber block for thin gauge blocks to apply even pressure (Fig. 2).
- (3) Check the measuring face for burrs with an optical flat. If the burrs have not been removed, repeat step (2). If burrs are too large, they may not be removed with an abrasive stone. If so, discard the gauge block.

* Mitutoyo does not offer Arkansas stones.

Typical application

