
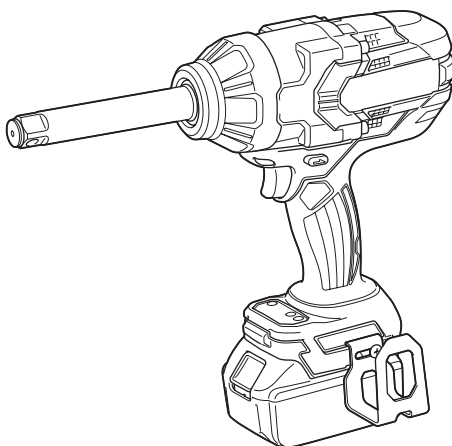
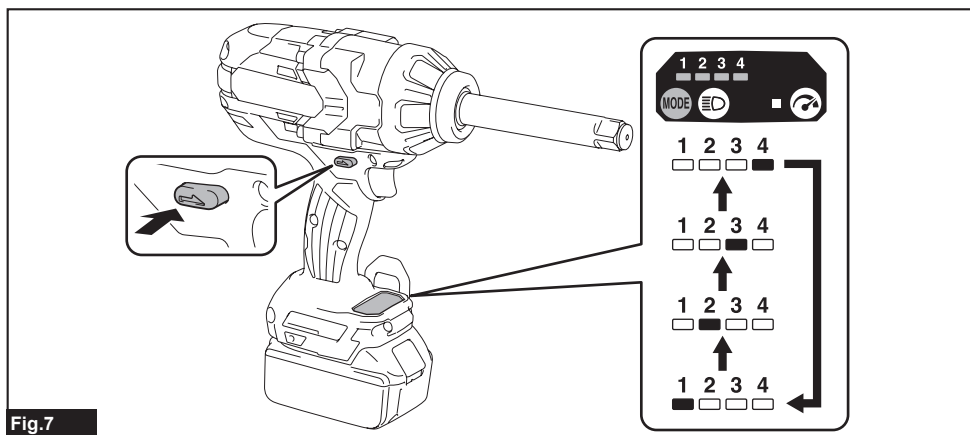
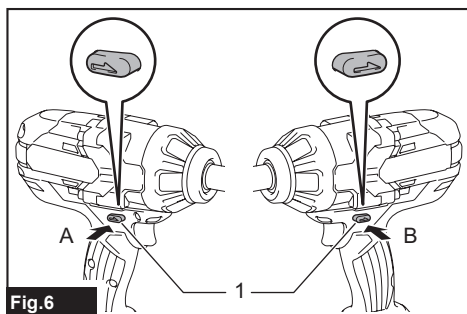
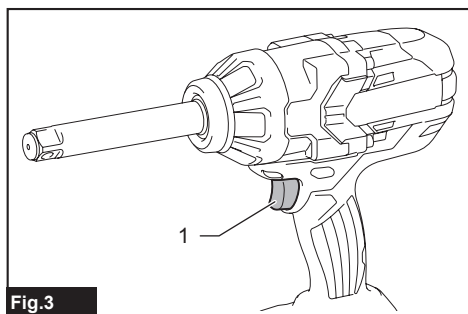
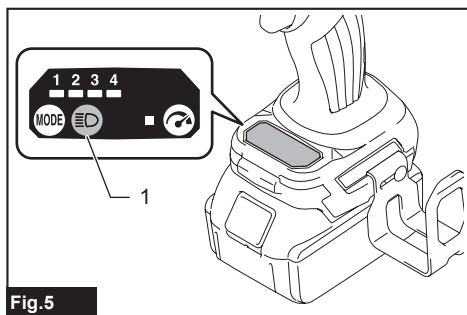
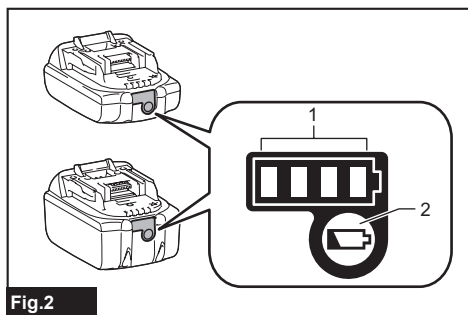
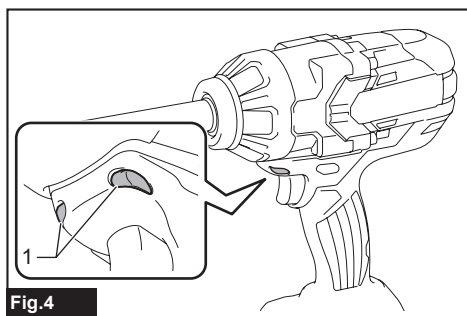


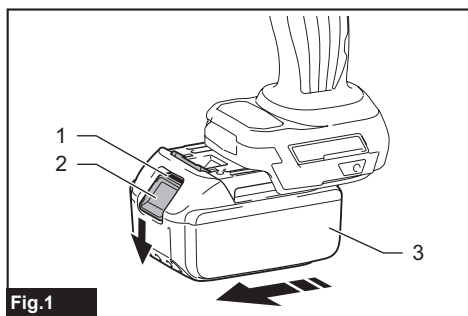

EN	Cordless Impact Wrench	INSTRUCTION MANUAL	5
ZHCN	充电式扳手	使用说明书	15
ID	Kunci Hentam Tanpa Kabel	PETUNJUK PENGGUNAAN	25
MS	Perengkuh Hentaman Tanpa Kord	MANUAL ARAHAN	36
VI	Máy Siết Bu Lông Cầm Tay Hoạt Động Bằng Pin	TÀI LIỆU HƯỚNG DẪN	47
TH	ประแจกระแทกแบบไร้สาย	คู่มือการใช้งาน	57

DTW1005





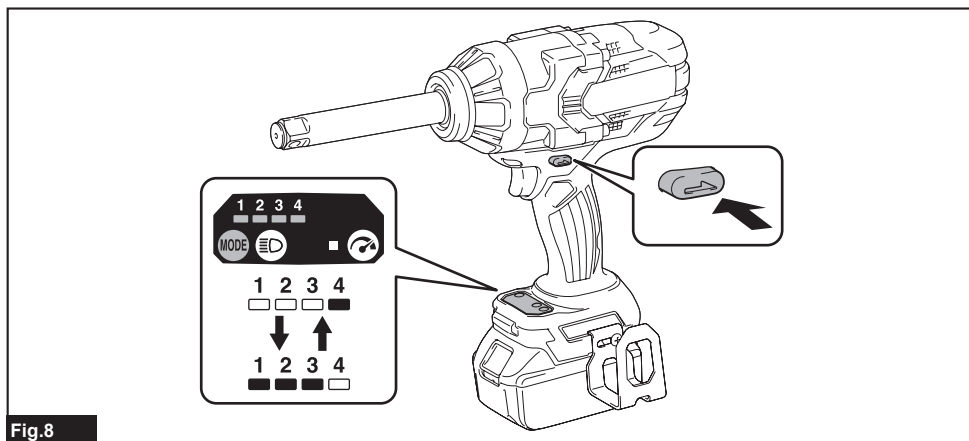


Fig.8

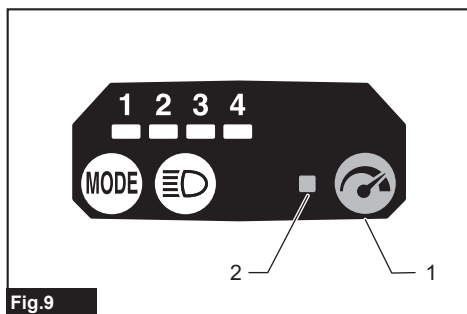


Fig.9

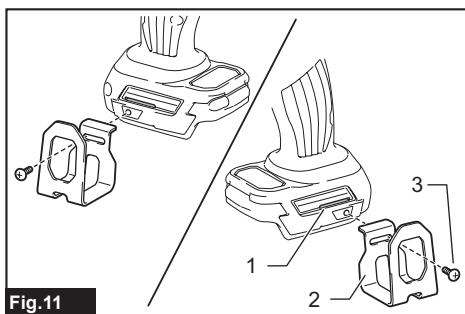


Fig.11

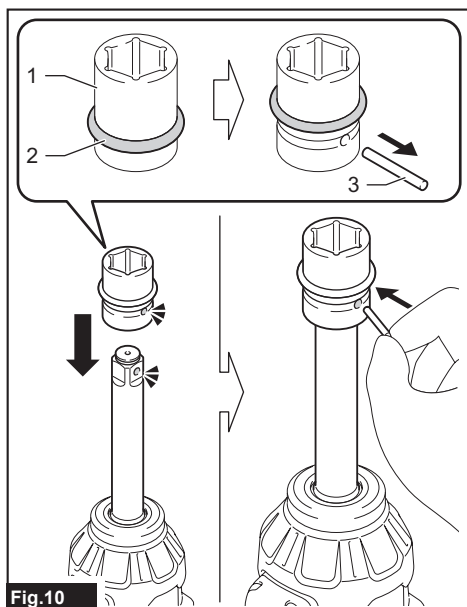


Fig.10

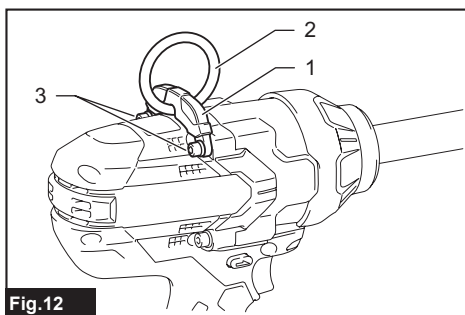


Fig.12

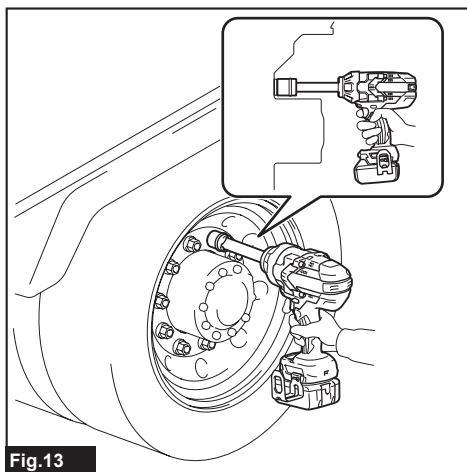


Fig.13

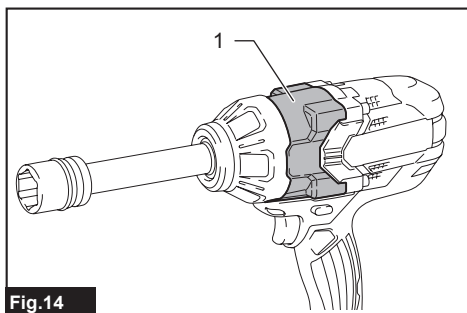


Fig.14

SPECIFICATIONS

Model:		DTW1005
Fastening capacities	Standard bolt	M12 - M33
	High tensile bolt	M10 - M24
Square drive		19.0 mm
No load speed (RPM)	Max impact mode (4)	0 - 1,800 min ⁻¹
	Hard impact mode (3)	0 - 1,000 min ⁻¹
	Medium impact mode (2)	0 - 900 min ⁻¹
	Soft impact mode (1)	0 - 800 min ⁻¹
Impacts per minute	Max impact mode (4)	0 - 2,200 min ⁻¹
	Hard impact mode (3)	0 - 1,800 min ⁻¹
	Medium impact mode (2)	0 - 1,600 min ⁻¹
	Soft impact mode (1)	*1 - min ⁻¹
Max. fastening torque *2	Max impact mode (4)	1,360 N·m
Target fastening torque *3	Hard impact mode (3)	300 - 450 N·m
	Medium impact mode (2)	50 - 150 N·m
	Soft impact mode (1)	30 - 50 N·m
Nut-Busting torque (at max impact mode (4))		1,700 N·m
Overall length		339 mm
Rated voltage		D.C. 18 V
Net weight		3.9 - 4.2 kg

*1 Tool stops automatically as soon as it has started impact blows.

*2 Fastening torque with M30 for 6 seconds.

*3 With M20 - M24.

- Due to our continuing program of research and development, the specifications herein are subject to change without notice.
- Specifications may differ from country to country.
- The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination are shown in the table.

Applicable battery cartridge and charger

Battery cartridge	BL1815N / BL1820B / BL1830B / BL1840B / BL1850B / BL1860B
Charger	DC18RC / DC18RD / DC18RE / DC18SD / DC18SE / DC18SF / DC18SH / DC18WC

- Some of the battery cartridges and chargers listed above may not be available depending on your region of residence.

⚠ WARNING: Only use the battery cartridges and chargers listed above. Use of any other battery cartridges and chargers may cause injury and/or fire.